


Area  
**JIM SHAFER [815306M]**  
 Machine Id  
**VOLVO PENTA 3200003000**  
 Component  
**Port IPS**  
 Fluid  
**VOLVO PENTA GL-5 SAE 75W90 (4 GAL)**

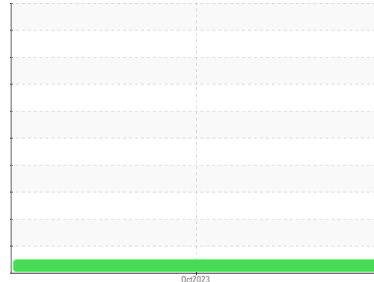

**DIAGNOSIS**

**Recommendation**

Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The condition of the oil is acceptable for the time in service.

**SAMPLE INFORMATION** method limit/base current history1 history2

Sample Number	Client Info	<b>VPA060483</b>	---	---
Sample Date	Client Info	<b>24 Oct 2023</b>	---	---
Machine Age	hrs	Client Info	<b>113</b>	---
Oil Age	hrs	Client Info	<b>40</b>	---
Oil Changed	Client Info	<b>Changed</b>	---	---
Sample Status		<b>NORMAL</b>	---	---

**WEAR METALS** method limit/base current history1 history2

PQ	ASTM D8184		<b>6</b>	---	---
Iron	ppm	ASTM D5185m	>200	<b>10</b>	---
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---
Silver	ppm	ASTM D5185m		<b>0</b>	---
Aluminum	ppm	ASTM D5185m		<b>&lt;1</b>	---
Lead	ppm	ASTM D5185m		<b>0</b>	---
Copper	ppm	ASTM D5185m		<b>6</b>	---
Tin	ppm	ASTM D5185m		<b>0</b>	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---

**ADDITIVES** method limit/base current history1 history2

Boron	ppm	ASTM D5185m		<b>300</b>	---
Barium	ppm	ASTM D5185m		<b>0</b>	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	---
Manganese	ppm	ASTM D5185m		<b>1</b>	---
Magnesium	ppm	ASTM D5185m		<b>76</b>	---
Calcium	ppm	ASTM D5185m		<b>12</b>	---
Phosphorus	ppm	ASTM D5185m		<b>1271</b>	---
Zinc	ppm	ASTM D5185m		<b>0</b>	---
Sulfur	ppm	ASTM D5185m		<b>21585</b>	---



**CONTAMINANTS** method limit/base current history1 history2

Silicon	ppm	ASTM D5185m		<b>&lt;1</b>	---
Sodium	ppm	ASTM D5185m		<b>3</b>	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	---

**VISUAL** method limit/base current history1 history2

White Metal	scalar	*Visual	NONE	<b>NONE</b>	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---
Free Water	scalar	*Visual		<b>NEG</b>	---








# OIL ANALYSIS REPORT

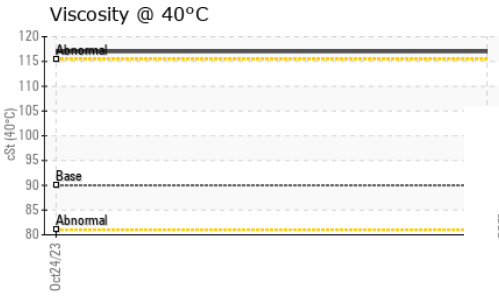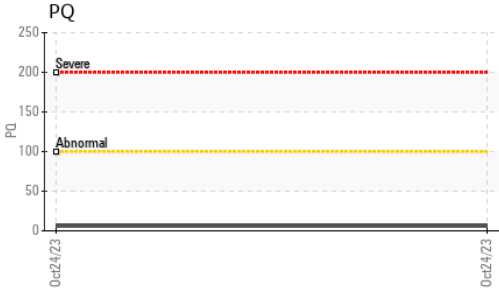

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	90.0	<b>117</b>	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2	
Color				no image	no image	no image
Bottom				no image	no image	no image

## GRAPHS

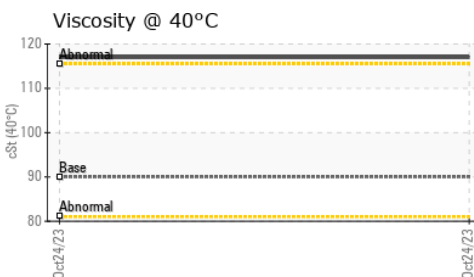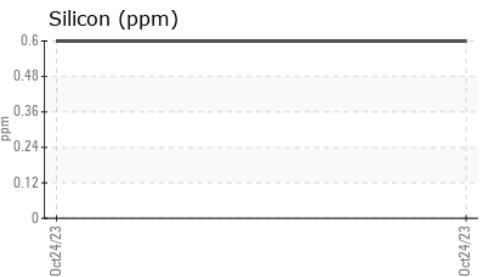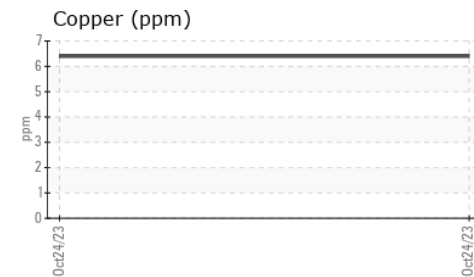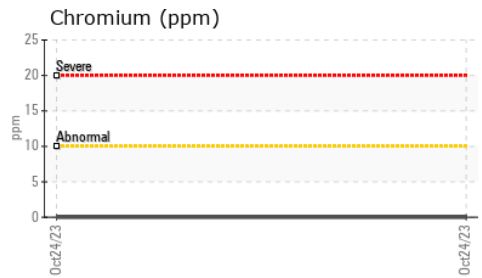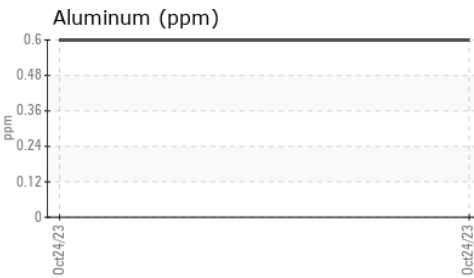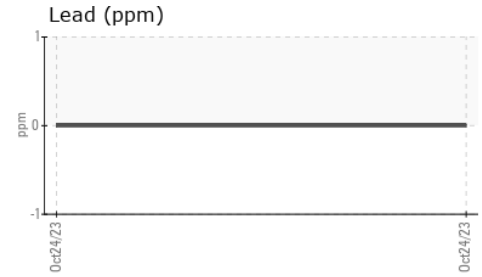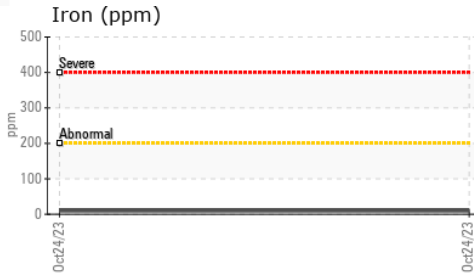

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VPA060483 **Received** : 31 Oct 2023  
**Lab Number** : 05994628 **Diagnosed** : 01 Nov 2023  
**Unique Number** : 10722988 **Diagnostician** : Don Baldrige  
**Test Package** : MOB 1 ( Additional Tests: PQ )

**Power Products Systems LLC**  
 432 Warren Avenue, 432 Warren Ave.  
 PORTLAND, ME  
 US 04103  
 Contact: Victor Barr  
 meservice@nedda.com  
 T: (207)797-5950  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)