




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**VOLVO EC460 8302 (S/N 80363)**  
 Component  
**Left Swing Drive**  
 Fluid  
**GEAR OIL SAE 80W140 (--- GAL)**

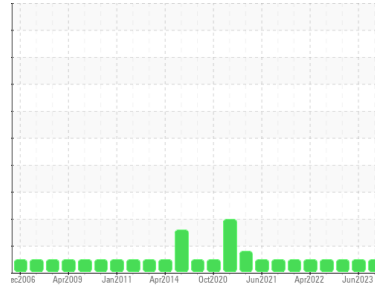

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0862926</b>	WC0816309	WC0775985
Sample Date	Client Info		<b>24 Oct 2023</b>	13 Jun 2023	27 Feb 2023
Machine Age	hrs	Client Info	<b>11971</b>	10939	10095
Oil Age	hrs	Client Info	<b>1032</b>	843	1093
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >1200	<b>8</b>	4	13
Chromium	ppm	ASTM D5185m >10	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>&lt;1</b>	2	1
Lead	ppm	ASTM D5185m >50	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m >50	<b>1</b>	0	0
Tin	ppm	ASTM D5185m >10	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 400	<b>129</b>	14	49
Barium	ppm	ASTM D5185m 200	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 12	<b>0</b>	<1	<1
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 12	<b>16</b>	4	11
Calcium	ppm	ASTM D5185m 150	<b>647</b>	1438	2836
Phosphorus	ppm	ASTM D5185m 1650	<b>419</b>	379	741
Zinc	ppm	ASTM D5185m 125	<b>183</b>	385	710
Sulfur	ppm	ASTM D5185m 22500	<b>2039</b>	1695	2580

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >100	<b>2</b>	1	4
Sodium	ppm	ASTM D5185m	<b>2</b>	0	0
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	0

## VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >0.25	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG

## FLUID PROPERTIES

	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 263	<b>106</b>	136	124






# OIL ANALYSIS REPORT

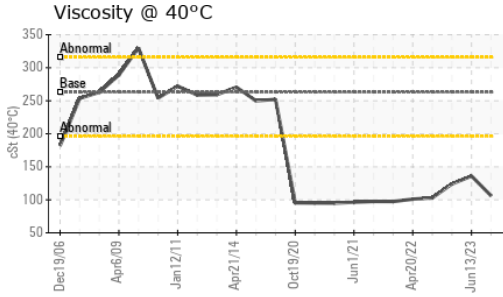

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

## GRAPHS

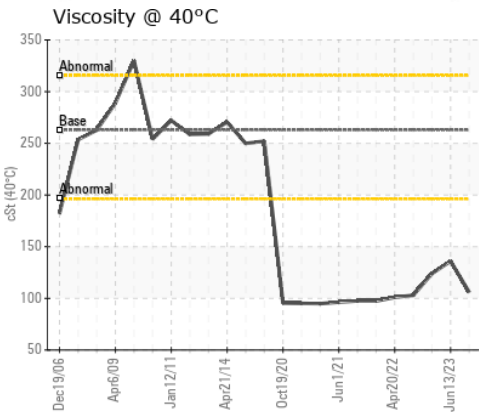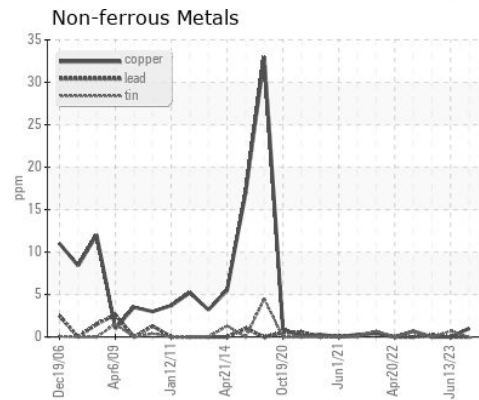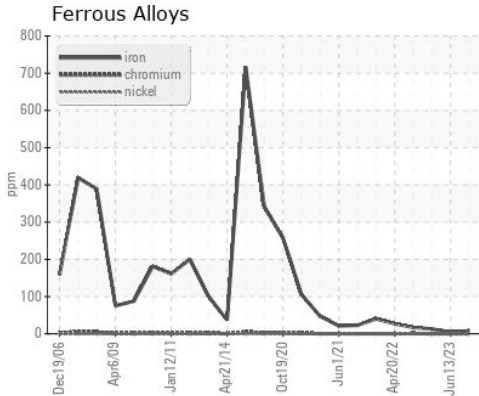

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0862926 **Received** : 31 Oct 2023  
**Lab Number** : **05994643** **Diagnosed** : 01 Nov 2023  
**Unique Number** : 10723003 **Diagnostician** : Don Baldrige  
**Test Package** : CONST

**TRADER CONSTRUCTION CO.**  
 PO DRAWER 1578  
 NEW BERN, NC  
 US 28563  
 Contact: MIKE WYATT  
 mw Wyatt@traderconstruction.com  
 T: (252)633-1399  
 F: (252)638-4871

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)