




OIL ANALYSIS REPORT



Area
OKLAHOMA/102/EG - DOZER
 Machine Id
36.22L [OKLAHOMA^102^EG - DOZER]
 Component
Left Final Drive
 Fluid
MOBIL MOBILTRANS HD 50 (4 GAL)

Sample Rating Trend

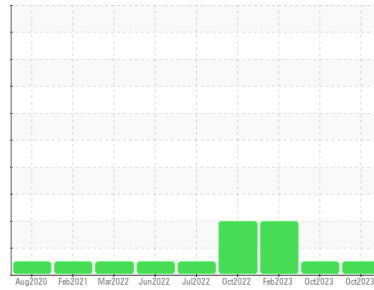

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0862683	WC0833833	WC0779870
Sample Date	Client Info		26 Oct 2023	03 Oct 2023	21 Feb 2023
Machine Age	hrs	Client Info	7238	7176	6252
Oil Age	hrs	Client Info	1378	5860	364
Oil Changed	Client Info		Not Chngd	N/A	N/A
Sample Status			NORMAL	NORMAL	ATTENTION

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >800	55	52	34
Chromium	ppm	ASTM D5185m >10	2	2	<1
Nickel	ppm	ASTM D5185m >5	<1	0	0
Titanium	ppm	ASTM D5185m >15	<1	<1	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >75	2	0	2
Lead	ppm	ASTM D5185m >10	2	<1	0
Copper	ppm	ASTM D5185m >75	1	2	<1
Tin	ppm	ASTM D5185m >8	<1	0	0
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	1	6	▲ 146
Barium	ppm	ASTM D5185m	5	7	0
Molybdenum	ppm	ASTM D5185m	0	<1	2
Manganese	ppm	ASTM D5185m	2	2	<1
Magnesium	ppm	ASTM D5185m	27	11	14
Calcium	ppm	ASTM D5185m	3034	3082	▲ 360
Phosphorus	ppm	ASTM D5185m	1136	1081	916
Zinc	ppm	ASTM D5185m	1328	1355	▲ 166
Sulfur	ppm	ASTM D5185m	11168	13662	▲ 28967

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >400	6	6	10
Sodium	ppm	ASTM D5185m	5	0	<1
Potassium	ppm	ASTM D5185m >20	4	6	<1

VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	VLITE
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE	NONE
Debris	scalar	*Visual NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >0.2	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

FLUID PROPERTIES

	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 195	190	188	▲ 300






OIL ANALYSIS REPORT

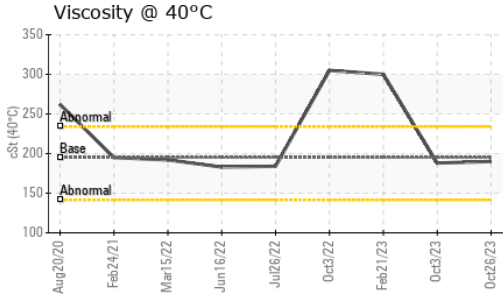

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

GRAPHS

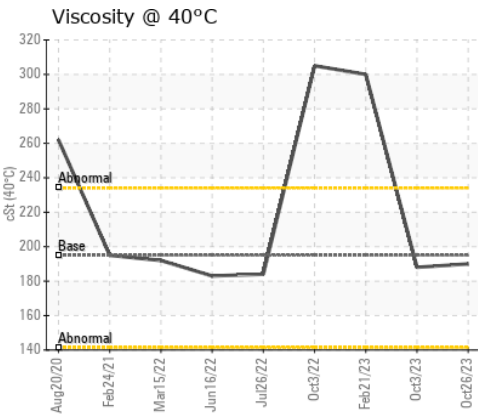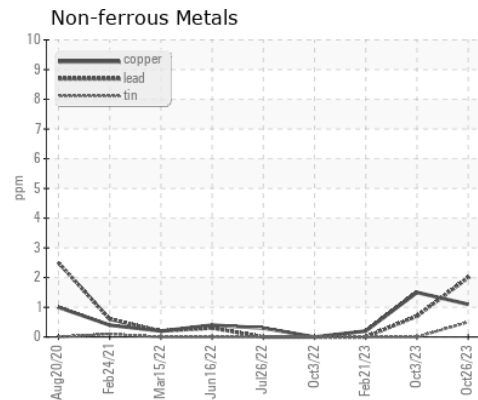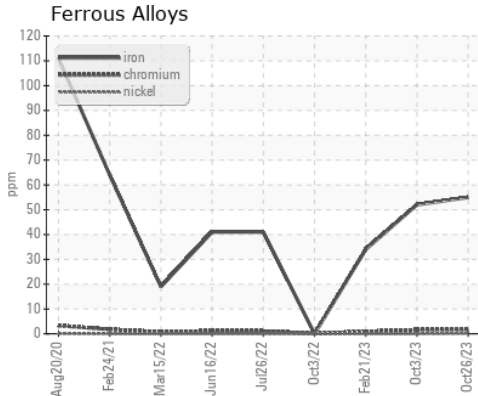

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0862683
Lab Number : 05994753
Unique Number : 10723113
Test Package : CONST

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: DOUG KING
 doug.king@sherwood.net
 T: (316)617-3161
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)