




COOLANT REPORT

Sample Rating Trend

NORMAL



Area
KANSAS/44/EG - OTHER SERVICE
 Machine Id
57.10W [KANSAS^44^EG - OTHER SERVICE]
 Component
Coolant
 Fluid
CAT EXTENDED LIFE COOLANT (ELC) (--- GAL)

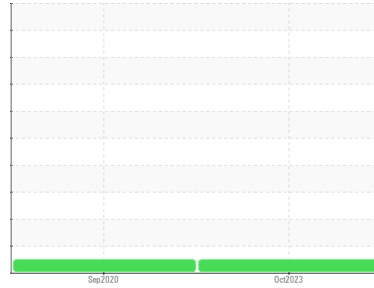

DIAGNOSIS

Recommendation

The fluid is suitable for further service.

Corrosion

All metal levels are normal indicating no corrosion in the cooling system.

Contaminants

There is no indication of any contamination in the coolant.

Coolant Condition

Glycol and nitrite levels are acceptable. The pH level of this fluid is within the acceptable limits.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0833820	WC0495491	---
Sample Date	Client Info		23 Oct 2023	25 Sep 2020	---
Machine Age	hrs	Client Info	1851	1053	---
Oil Age	hrs	Client Info	0	1000	---
Oil Changed	Client Info		Not Chngd	Not Chngd	---
Sample Status			NORMAL	NORMAL	---

PHYSICAL TEST RESULTS

	method	limit/base	current	history1	history2
Specific Gravity	*ASTM D1298		1.067	---	---
pH	Scale 0-14 ASTM D1287		8.37	8.48	---
Nitrites	ppm AP-053:2009		712	1312	---
Reserve Alkalinity	Scale 0-20 *ASTM D1121		---	---	---
Percentage Glycol	% ASTM D3321		49.9	54	---
Freezing Point	°F ASTM D3321		-33	-49	---
Total Dissolved Solids			357.5	557.5	---
Carboxylate			fail	fail	---

CORROSION INHIBITORS

	method	limit/base	current	history1	history2
Silicon	ppm ASTM D6130	0	16	77	---
Phosphorus	ppm ASTM D6130	0	139	1787	---
Boron	ppm ASTM D6130	0	15	259	---
Molybdenum	ppm ASTM D6130	950	603	301	---

CORROSION

	method	limit/base	current	history1	history2
Iron	ppm ASTM D6130	>15	0	1	---
Aluminum	ppm ASTM D6130	>10	0	2	---
Copper	ppm ASTM D6130	>10	<1	5	---
Lead	ppm ASTM D6130	>10	<1	2	---
Tin	ppm ASTM D6130	>10	2	7	---
Zinc	ppm ASTM D6130		0	1	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Chlorine	ppm ASTM D6130		11	48	---

CARRIER SALTS


	method	limit/base	current	history1	history2
Sodium	ppm ASTM D6130		3699	1827	---
Potassium	ppm ASTM D6130		1363	4433	---





SCALE POTENTIAL

	method	limit/base	current	history1	history2
Calcium	ppm ASTM D6130		<1	<1	---
Magnesium	ppm ASTM D6130		<1	<1	---









COOLANT REPORT

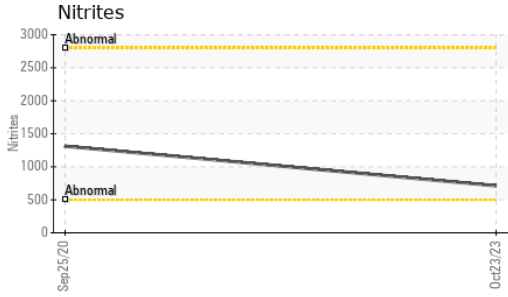

VISUAL	method	limit/base	current	history1	history2
Coolant Color	*Visual		Red	Green	---
Coolant Appearance	*Visual	Clear	normal	hazy	---
Color					no image
Bottom					no image

GRAPHS

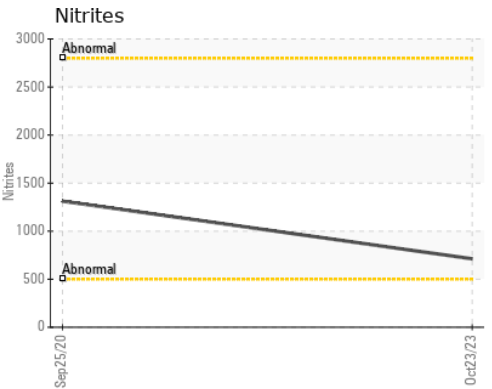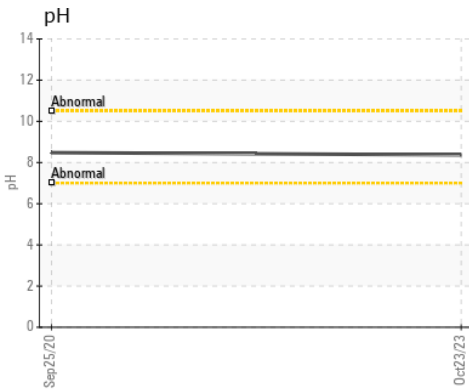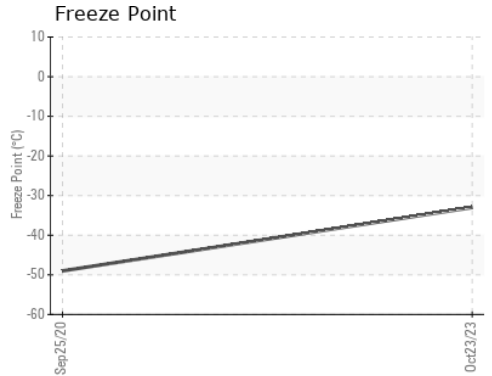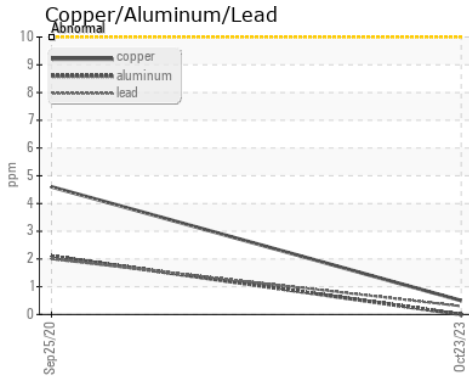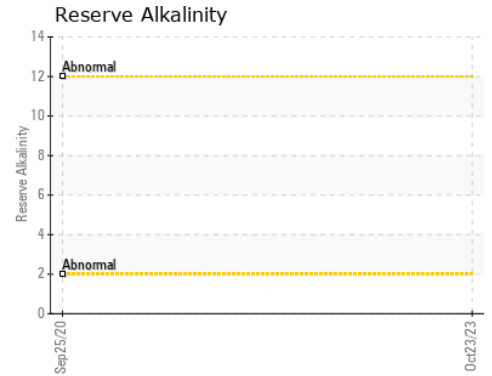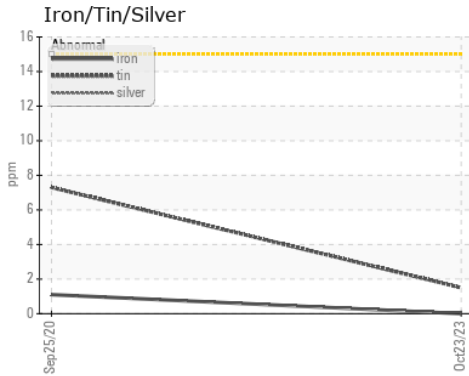

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0833820 **Received** : 31 Oct 2023
Lab Number : 05994861 **Diagnosed** : 03 Nov 2023
Unique Number : 10723221 **Diagnostician** : Jonathan Hester
Test Package : COOL- (Additional Tests: COOL, ICP)

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: DOUG KING
 doug.king@sherwood.net
 T: (316)617-3161
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)