

## **OIL ANALYSIS REPORT**

### KAESER SM 7.5 4317706 (S/N 1055) Component

Compressor

KAESER SIGMA (OEM) M-460 (--- LTR)

#### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear


All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

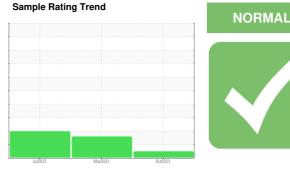



SAMPLE INFORMATION method KCP54125 KCP48436 KCPA006857 Sample Number **Client Info** 11 Oct 2023 Sample Date Client Info 07 Mar 2023 15 Jul 2022 37002 Machine Age hrs **Client Info** 35660 34266 Oil Age hrs Client Info 0 1394 8844 Oil Changed **Client Info** N/A Changed Changed NORMAL Sample Status ATTENTION ABNORMAL WEAR METALS ASTM D5185m >50 0 0 Iron ppm <1 ppm Chromium ASTM D5185m >10 0 0 0 Nickel ppm ASTM D5185m >3 0 0 0 ASTM D5185m >3 Titanium 0 0 0 ppm 0 Silver ppm ASTM D5185m >2 0 0 Aluminum ASTM D5185m >10 0 <1 ppm <1 Lead ASTM D5185m >10 0 0 0 ppm 9 Copper ASTM D5185m >50 13 4 ppm Tin ppm ASTM D5185m >10 0 0 0 Vanadium ASTM D5185m 0 0 0 ppm Cadmium ppm ASTM D5185m 0 0 0 0 0 0 2 ASTM D5185m Boron ppm Barium ppm ASTM D5185m 90 0 0 11 0 0 0 Molybdenum ASTM D5185m 0 ppm 0 0 Manganese ppm ASTM D5185m <1 43 61 Magnesium ASTM D5185m 100 15 ppm 0 0 Calcium ppm ASTM D5185m 0 <1 Phosphorus ppm ASTM D5185m 0 0 0 3 Zinc ASTM D5185m 0 55 16 18 ppm 20901 Sulfur ASTM D5185m 23500 19074 21492 ppm CONTAMINANTS Silicon ppm ASTM D5185m >25 <1 <1 <1 Sodium ppm ASTM D5185m 11 17 18 Potassium ASTM D5185m >20 3 1 <1 ppm 0.011 0.025 0.030 Water % ASTM D6304 >0.05 ASTM D6304 >500 118.1 256.1 302.1 ppm Water ppm FLUID CLEANLINESS


I LOID OLLANLINE00	methou			Thistory I	mstoryz
Particles >4µm	ASTM D7647		3118	4615	24796
Particles >6µm	ASTM D7647	>1300	969	▲ 1572	▲ 7502
Particles >14µm	ASTM D7647	>80	63	<b>1</b> 53	<b>A</b> 849
Particles >21µm	ASTM D7647	>20	14	<b>A</b> 38	<u> </u>
Particles >38µm	ASTM D7647	>4	0	4	<b>6</b>
Particles >71µm	ASTM D7647	>3	0	0	0
Oil Cleanliness	ISO 4406 (c)	>17/13	17/13	<b>1</b> 8/14	🔺 20/17
FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN) mg KO	H/g ASTM D8045	1.0	0.24	0.26	0.38


Report Id: TRICUM [WUSCAR] 05995034 (Generated: 11/02/2023 09:52:46) Rev: 1


Contact/Location: RICH HARROP - TRICUM



# **OIL ANALYSIS REPORT**

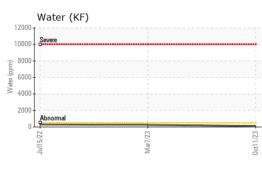


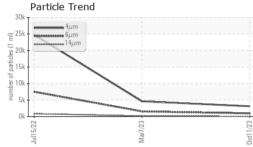

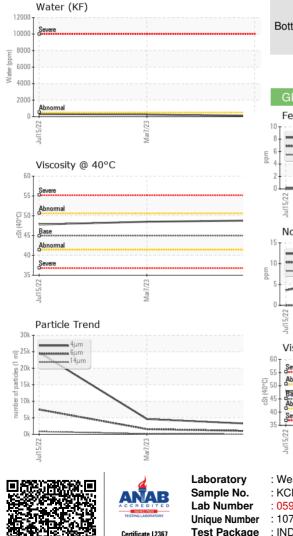

VISUAL		method	limit/base	ourropt	history1	history2
VISUAL		method	IIIIII/Dase	current	TIISTOLA I	nistoryz
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	48.8	48.5	47.8
SAMPLE IMAGES	;	method	limit/base	current	history1	history2
Color						

Bottom

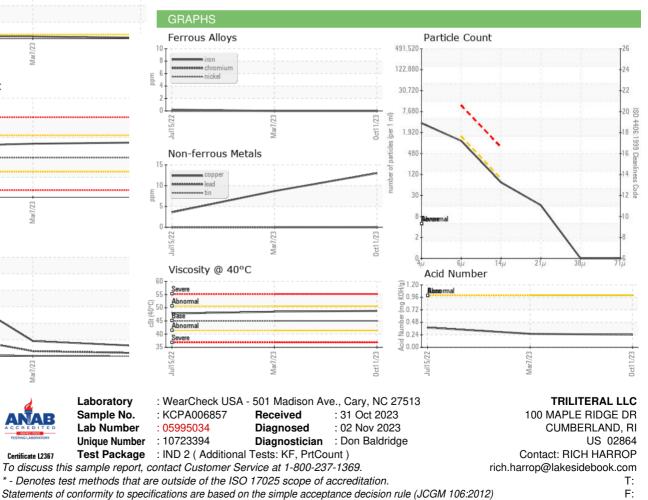

Contact/Location: RICH HARROP - TRICUM