




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**COLORADO/443/EG - LOADER**  
 Machine Id  
**45.41L [COLORADO^443^EG - LOADER]**  
 Component  
**Transmission (Manual)**  
 Fluid  
**MOBIL MOBILTRANS AST 30 (--- GAL)**

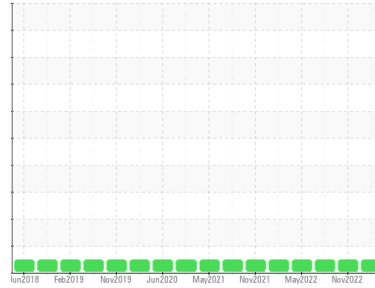

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0859667</b>	WC0718263	WC0672283
Sample Date	Client Info		<b>27 Oct 2023</b>	14 Nov 2022	24 May 2022
Machine Age	hrs	Client Info	<b>7244</b>	6738	6270
Oil Age	hrs	Client Info	<b>0</b>	5409	5299
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Not Changd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	<b>15</b>	14	8
Chromium	ppm	ASTM D5185m >5	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >7	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>1</b>	2	<1
Lead	ppm	ASTM D5185m >45	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m >225	<b>&lt;1</b>	<1	0
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>31</b>	30	34
Barium	ppm	ASTM D5185m	<b>0</b>	1	0
Molybdenum	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>12</b>	16	15
Calcium	ppm	ASTM D5185m	<b>3116</b>	3166	2943
Phosphorus	ppm	ASTM D5185m	<b>906</b>	989	878
Zinc	ppm	ASTM D5185m	<b>1313</b>	1232	1041
Sulfur	ppm	ASTM D5185m	<b>4874</b>	5742	3957

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >125	<b>4</b>	3	3
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	0	1
Potassium	ppm	ASTM D5185m >20	<b>0</b>	2	0

## VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>LIGHT</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG

## FLUID PROPERTIES

	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 57.6	<b>97.4</b>	98.7	100






# OIL ANALYSIS REPORT

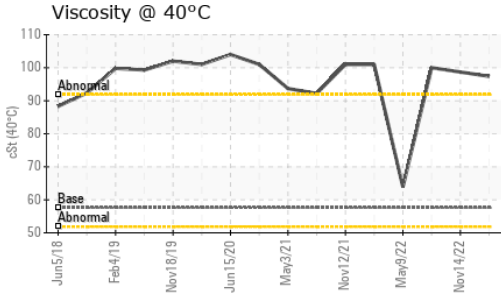

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

## GRAPHS

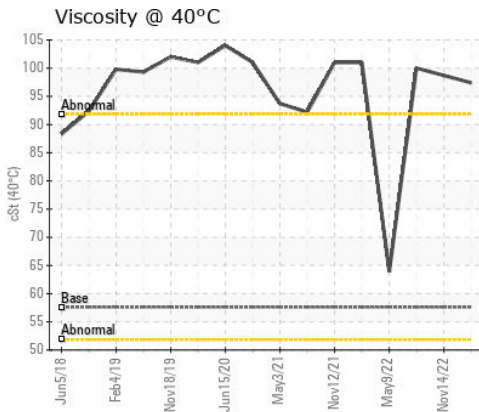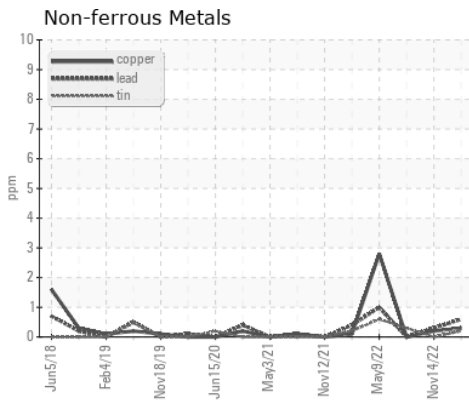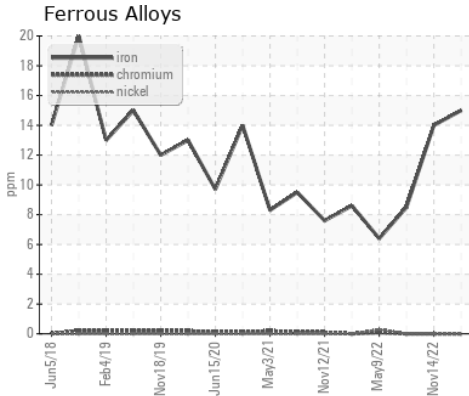

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0859667 **Received** : 31 Oct 2023  
**Lab Number** : **05995154** **Diagnosed** : 02 Nov 2023  
**Unique Number** : 10723514 **Diagnostician** : Don Baldrige  
**Test Package** : CONST

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: DOUG KING  
 doug.king@sherwood.net  
 T: (316)617-3161  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)