


Tri State

OIL ANALYSIS REPORT

Hydraulic System

AW HYDRAULIC OIL ISO 46 (--- GAL)

[Tri State] Hydraulic - Pilot House





DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Feb2022 Mar2023 Oct2023						
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2		
Sample Number		Client Info		WC0719231	WC0735413	WC0657063		
Sample Date		Client Info		27 Oct 2023	13 Mar 2023	01 Feb 2022		
Machine Age	hrs	Client Info		0	0	0		
Oil Age	hrs	Client Info		0	0	1		
Oil Changed		Client Info		Filtered	N/A	Not Changd		
Sample Status				NORMAL	ABNORMAL	ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>20	0	0	<1		
Chromium	ppm	ASTM D5185m	>20	<1	0	<1		
Nickel	ppm	ASTM D5185m	>20	0	0	0		
Titanium	ppm	ASTM D5185m		0	0	0		
Silver	ppm	ASTM D5185m		0	0	<1		
Aluminum	ppm	ASTM D5185m	>20	0	0	0		
Lead	ppm	ASTM D5185m	>20	<1	<1	2		
Copper	ppm	ASTM D5185m	>20	6	5	5		
Tin	ppm	ASTM D5185m	>20	<1	0	<1		
Antimony	ppm	ASTM D5185m				<1		
Vanadium	ppm	ASTM D5185m		0	0	0		
Cadmium	ppm	ASTM D5185m		0	0	0		
ADDITIVES	P	method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	5	0	0	3		
Barium	ppm	ASTM D5185m	5	0	0	0		
Molybdenum	ppm	ASTM D5185m	5	0	<1	<1		
Manganese	ppm	ASTM D5185m	3	0	<1	0		
Magnesium	ppm	ASTM D5185m	25	3	5	10		
Calcium	ppm	ASTM D5185m	200	61	64	117		
Phosphorus		ASTM D5185m	300	326	335	583		
Zinc	ppm	ASTM D5185m	370	439	437	778		
Sulfur	ppm	ASTM D5185m	2500	846	654	1397		
CONTAMINANTS		method	limit/base		history1	history2		
Silicon	ppm	ASTM D5185m	>15	<1	1	<1		
Sodium	ppm	ASTM D5185m	>10	<1	<1	1		
Potassium		ASTM D5185m	>20	<1	0	<1		
Water	ppm %	ASTM D5165111	>0.05	0.003	0.002	0.003		
ppm Water	ppm	ASTM D6304 ASTM D6304	>50.05	34.5	23.9	26.1		
FLUID CLEANLI		method	limit/base		history1	history2		
Particles >4µm		ASTM D7647	>5000	344	<u> 15011</u>	<u>^</u> 20197		
Particles >6µm		ASTM D7647	>1300	61	<u>▲</u> 1701	<u>△</u> 2390		
Particles >14µm		ASTM D7647	>160	6	36	86		
Particles >21µm		ASTM D7647		2	6	23		
Particles >38µm		ASTM D7647	>10	0	0	1		
Particles >71µm		ASTM D7647		0	0	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	16/13/10	△ 21/18/12	<u>22/18/14</u>		
FLUID DEGRADA	ATION -	method	limit/base		history1	history2		
			- mmodase	Ourrent	- Instory I	mstory2		

0.35


mg KOH/g ASTM D8045 0.57

Acid Number (AN)

0.38



OIL ANALYSIS REPORT

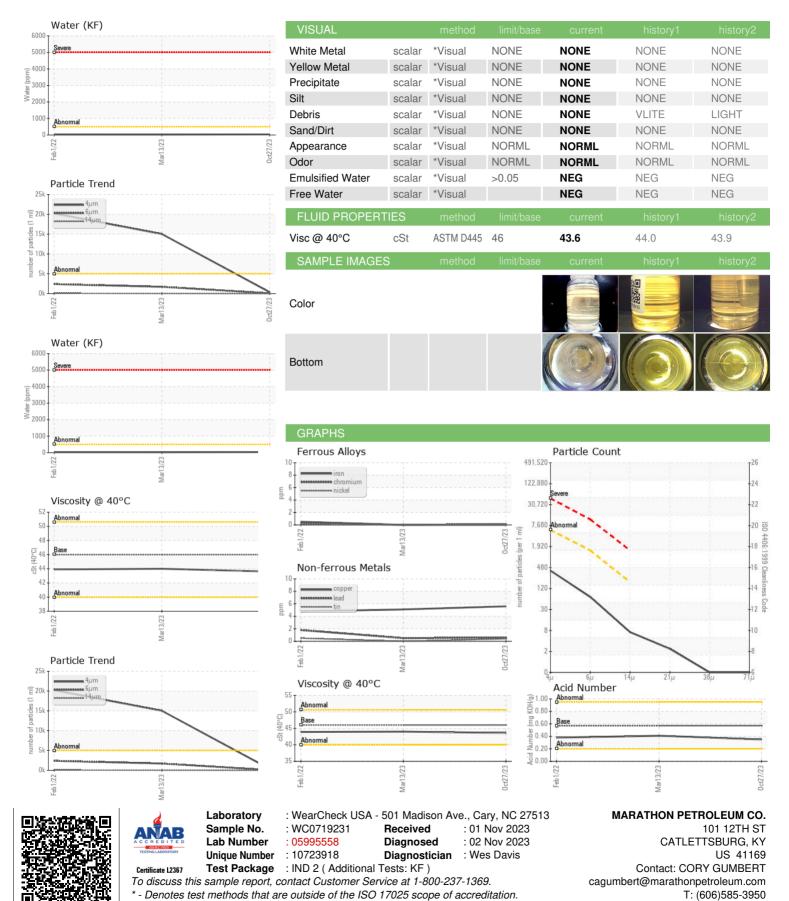

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: x: