


Machine Ic

Component

PROBLEM SUMMARY

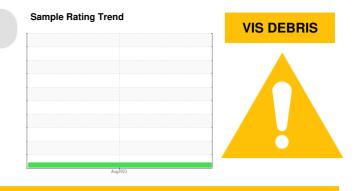

Compressor ^{Fluid} KAESER SIGMA (OEM) FG-460 (--- GAL)

KAESER SFC 75S 6393992 (S/N 1095)

COMPONENT CONDITION SUMMARY

No relevant graphs to display

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

PROBLEMATIC T	EST RE	SULTS			
Sample Status				ABNORMAL	
Debris	scalar	*Visual	NONE		

Customer Id: ROCNAN Sample No.: KC111390 Lab Number: 05995608 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

RECOMMENDE	ED ACTIONS			
Action	Status	Date	Done By	Description
Alert			?	We were unable to perform a particle count due to a high concentration of particles present in this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT



KAESER SFC 75S 6393992 (S/N 1095)

Compressor Fluid

KAESER SIGMA (OEM) FG-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

Wear

All component wear rates are normal.

Contamination

Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Aug2023		
SAMPLE INFORM	NATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC111390		
Sample Date		Client Info		17 Aug 2023		
Machine Age	hrs	Client Info		11122		
Oil Age	hrs	Client Info		3550		
Oil Changed		Client Info		Not Changd		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	4		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	9		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>50	6		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		1		
Calcium	ppm	ASTM D5185m		<1		
Phosphorus	ppm	ASTM D5185m	500	264		
Zinc	ppm	ASTM D5185m		274		
-			line it /le e e e		la la tamat	
CONTAMINANTS)	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	2		
Sodium	nnm					
	ppm	ASTM D5185m		<1		
Potassium	ppm	ASTM D5185m	>20	<1 <1		
Water		ASTM D5185m ASTM D6304	>0.05	<1 <1 0.003		
	ppm	ASTM D5185m		<1 <1		
Water	ppm % ppm	ASTM D5185m ASTM D6304	>0.05	<1 <1 0.003		
Water ppm Water	ppm % ppm	ASTM D5185m ASTM D6304 ASTM D6304	>0.05 >500	<1 <1 0.003 36.1		
Water ppm Water FLUID DEGRADA	ppm % ppm ATION	ASTM D5185m ASTM D6304 ASTM D6304 method	>0.05 >500 limit/base	<1 <1 0.003 36.1 current	 history1	 history2
Water ppm Water FLUID DEGRADA Acid Number (AN)	ppm % ppm ATION	ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D8045	>0.05 >500 limit/base 1.5	<1 <1 0.003 36.1 0.67 current NONE	 history1 	 history2
Water ppm Water FLUID DEGRADA Acid Number (AN) VISUAL	ppm % ppm ATION mg KOH/g	ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D8045 method	>0.05 >500 limit/base 1.5 limit/base	<1 <1 0.003 36.1 current 0.67 current	 history1 history1	 history2 history2
Water ppm Water FLUID DEGRADA Acid Number (AN) VISUAL White Metal	ppm % ppm TION mg KOH/g scalar	ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D8045 method *Visual	>0.05 >500 limit/base 1.5 limit/base NONE	<1 <1 0.003 36.1 0.67 current NONE NONE NONE	 history1 history1 	history2
Water ppm Water FLUID DEGRADA Acid Number (AN) VISUAL White Metal Yellow Metal	ppm % ppm ATION mg KOH/g scalar scalar	ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D8045 method *Visual	>0.05 >500 limit/base 1.5 limit/base NONE NONE	<1 <1 0.003 36.1 0.67 current NONE NONE	 history1 history1 	 history2 history2
Water ppm Water FLUID DEGRADA Acid Number (AN) VISUAL White Metal Yellow Metal Precipitate	ppm % ppm ATION mg KOH/g scalar scalar scalar	ASTM D5185m ASTM D6304 ASTM D6304 ASTM D8045 Method *Visual *Visual *Visual	>0.05 >500 limit/base 1.5 limit/base NONE NONE NONE	<1 <1 0.003 36.1 0.67 current NONE NONE NONE	 history1 history1 	 history2 history2
Water ppm Water FLUID DEGRADA Acid Number (AN) VISUAL White Metal Yellow Metal Precipitate Silt	ppm % ppm ATION mg KOH/g scalar scalar scalar scalar scalar	ASTM D5185m ASTM D6304 ASTM D6304 Method *Visual *Visual *Visual *Visual	>0.05 >500 limit/base 1.5 limit/base NONE NONE NONE NONE	<1 <1 0.003 36.1 0.67 current NONE NONE NONE NONE NONE	 history1 history1 	 history2 history2
Water ppm Water FLUID DEGRADA Acid Number (AN) VISUAL White Metal Yellow Metal Precipitate Silt Debris	ppm % ppm ATION mg KOH/g scalar scalar scalar scalar scalar scalar	ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D8045 *Visual *Visual *Visual *Visual *Visual	>0.05 >500 limit/base 1.5 limit/base NONE NONE NONE NONE NONE	<1 <1 0.003 36.1 0.67 0.007 NONE NONE NONE NONE NONE NONE MONE MONE MONE MONE MODER 	 history1 history1 	 history2 history2
Water ppm Water FLUID DEGRADA Acid Number (AN) VISUAL White Metal Yellow Metal Precipitate Silt Debris Sand/Dirt Appearance	ppm % ppm TION scalar scalar scalar scalar scalar scalar scalar	ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D8045 *Visual *Visual *Visual *Visual *Visual *Visual	>0.05 >500 limit/base 1.5 limit/base NONE NONE NONE NONE NONE NONE	<1 <.1 <.0.003 36.1	 history1 history1 	 history2
Water ppm Water FLUID DEGRADA Acid Number (AN) VISUAL White Metal Yellow Metal Precipitate Silt Debris Sand/Dirt	ppm % ppm TION scalar scalar scalar scalar scalar scalar scalar scalar	ASTM D5185m ASTM D6304 ASTM D6304 ASTM D8045 ASTM D8045 *Visual *Visual *Visual *Visual *Visual *Visual *Visual	>0.05 >500 limit/base 1.5 limit/base NONE NONE NONE NONE NONE NONE NONE	<1 <1 0.003 36.1 0.67 0.67 0.001 0.01	 history1 history1 	 history2 history2

Sample Rating Trend



OIL ANALYSIS REPORT

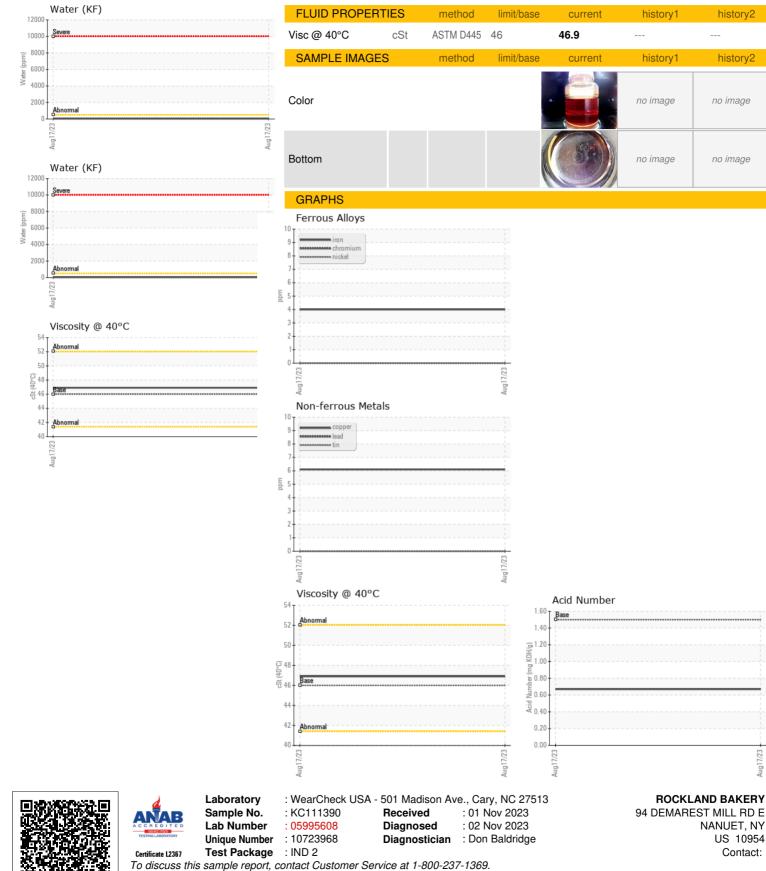

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

NANUET, NY

US 10954

Contact:

7/23

Aud 1

history2

history2

no image

no image