

PROBLEM SUMMARY

Sample Rating Trend

ISO

Machine Id


KAESER DSD 150 5352628 (S/N 1172)

Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

COMPONENT CONDITION SUMMARY

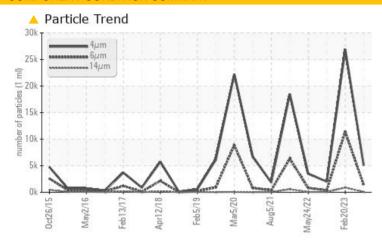

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS								
Sample Status			ATTENTION	ABNORMAL	NORMAL			
Particles >6µm	ASTM D7647	>1300	1378	<u>11394</u>	353			
Oil Cleanliness	ISO 4406 (c)	>/17/13	20/18/13	<u>22/21/17</u>	18/16/12			

Customer Id: COOGOLCO Sample No.: KCPA006435 Lab Number: 05995620 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

20 Feb 2023 Diag: Don Baldridge

ISO



No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



20 Oct 2022 Diag: Angela Borella

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



24 May 2022 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

KAESER DSD 150 5352628 (S/N 1172)

Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

142015 May2016 Feb2017 Apr2018 Feb2019 Mar2020 Aug2021 May2022 Feb2023							
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2	
Sample Number		Client Info		KCPA006435	KCP54794	KCP46543D	
Sample Date		Client Info		20 Oct 2023	20 Feb 2023	20 Oct 2022	
Machine Age	hrs	Client Info		71875	66184	63233	
Oil Age	hrs	Client Info		0	3000	3000	
Oil Changed		Client Info		N/A	Changed	Changed	
Sample Status				ATTENTION	ABNORMAL	NORMAL	
WEAR METALS		method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>50	0	0	<1	
Chromium	ppm	ASTM D5185m	>10	0	0	0	
Nickel	ppm	ASTM D5185m	>3	0	<1	0	
Titanium	ppm	ASTM D5185m	>3	0	0	0	
Silver	ppm	ASTM D5185m	>2	0	0	0	
Aluminum	ppm	ASTM D5185m	>10	<1	1	1	
Lead	ppm	ASTM D5185m	>10	0	0	0	
Copper	ppm	ASTM D5185m	>50	8	3	6	
Tin	ppm	ASTM D5185m	>10	0	<1	0	
Vanadium	ppm	ASTM D5185m		0	0	0	
Cadmium	ppm	ASTM D5185m		0	0	0	
ADDITIVES		method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		0	0	0	
Barium	ppm	ASTM D5185m	90	0	75	<1	
Molybdenum	ppm	ASTM D5185m		0	0	0	
Manganese	ppm	ASTM D5185m		0	0	0	
Magnesium	ppm	ASTM D5185m	90	1	78	18	
Calcium	ppm	ASTM D5185m	2	<1	2	0	
Phosphorus	ppm	ASTM D5185m		<1	2	1	
Zinc	ppm	ASTM D5185m		0	4	7	
Sulfur	ppm	ASTM D5185m		16862	17989	20944	
CONTAMINANTS		method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	<1	0	0	
Sodium	ppm	ASTM D5185m		<1	12	6	
Potassium	ppm	ASTM D5185m	>20	<1	4	0	
Water	%	ASTM D6304	>0.05	0.002	0.013	0.007	
ppm Water	ppm	ASTM D6304	>500	20.7	136.9	77.2	
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2	
Particles >4µm		ASTM D7647		5058	26880	2008	
Particles >6μm		ASTM D7647	>1300	<u> </u>	<u>▲</u> 11394	353	
Particles >14μm		ASTM D7647	>80	60	<u></u> 880	37	
Particles >21µm		ASTM D7647	>20	13	<u>125</u>	12	
Particles >38μm		ASTM D7647	>4	0	<u>^</u> 6	0	
Particles >71µm		ASTM D7647	>3	0	0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>^</u> 20/18/13	<u>22/21/17</u>	18/16/12	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2	
Acid Number (AN)	ma KOH/a	ASTM D8045	0.4	0.41	0.49	0.40	

Acid Number (AN)

mg KOH/g ASTM D8045 0.4


0.49

0.41

0.40



OIL ANALYSIS REPORT

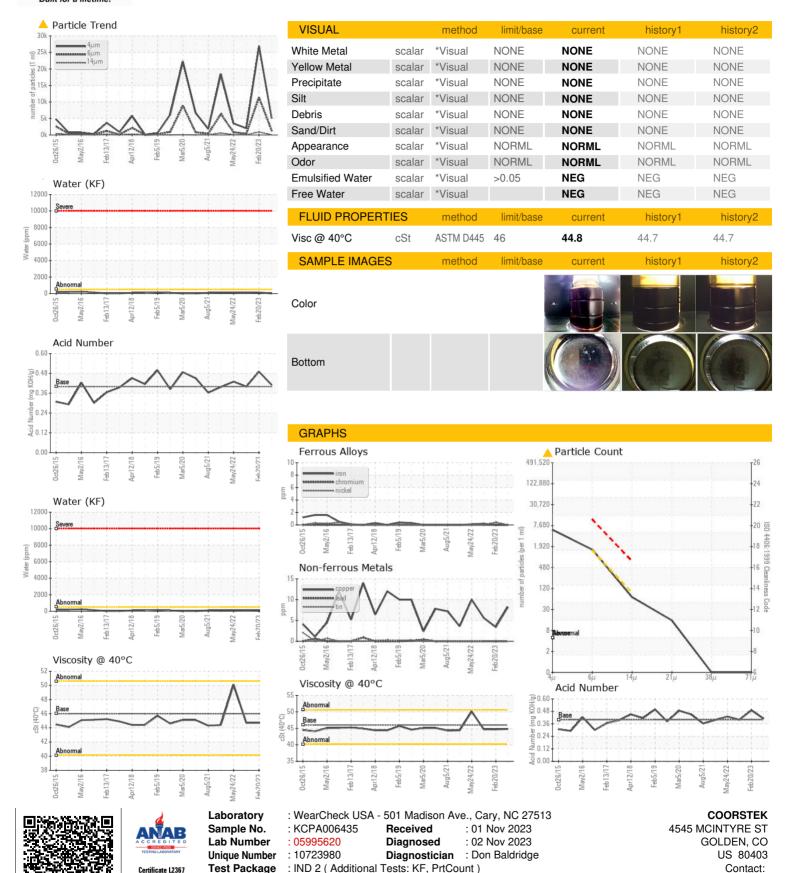

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F: