

OIL ANALYSIS REPORT

Sample Rating Trend





8 QUINCY (S/N 93149)

Component

Compressor

USPI MAX FG AIR 46 (--- GAL)

_ D	Ι Α	0	10	\circ	
DI	IA	Gľ	VО	2	5

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

6:2017 Feb:2018 New2018 Aug2019 May2020 Feb:2021 New2021 Jul2022 Jul2023								
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2		
Sample Number		Client Info		USPM31134	USPM29094	USPM28954		
Sample Date		Client Info		31 Oct 2023	26 Jul 2023	03 May 2023		
Machine Age	hrs	Client Info		94960	93536	93533		
Oil Age	hrs	Client Info		0	0	0		
Oil Changed		Client Info		N/A	N/A	Not Changd		
Sample Status				NORMAL	NORMAL	NORMAL		
WEAR METALS		method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>50	0	0	0		
Chromium	ppm	ASTM D5185m	>10	0	0	0		
Nickel	ppm	ASTM D5185m		<1	0	0		
Titanium	ppm	ASTM D5185m		0	0	0		
Silver	ppm	ASTM D5185m		0	0	0		
Aluminum	ppm	ASTM D5185m	>25	<1	0	0		
Lead	ppm	ASTM D5185m	>25	0	0	0		
Copper	ppm	ASTM D5185m	>50	0	0	<1		
Tin	ppm	ASTM D5185m	>15	0	0	0		
Vanadium	ppm	ASTM D5185m		0	0	0		
Cadmium	ppm	ASTM D5185m		0	0	0		
ADDITIVES		method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	0	0	0	0		
Barium	ppm	ASTM D5185m	0	0	0	0		
Molybdenum	ppm	ASTM D5185m	0	0	0	0		
Manganese	ppm	ASTM D5185m		0	0	0		
Magnesium	ppm	ASTM D5185m	0	1	0	<1		
Calcium	ppm	ASTM D5185m	0	1	0	0		
Phosphorus	ppm	ASTM D5185m	0	<1	0	0		
Zinc	ppm	ASTM D5185m	0	0	0	0		
Sulfur	ppm	ASTM D5185m	0	2	0	0		
CONTAMINANTS		method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>25	<1	0	<1		
Sodium	ppm	ASTM D5185m		0	0	0		
Potassium	ppm	ASTM D5185m	>20	<1	<1	<1		
Water	%	ASTM D6304	>0.1	0.013	0.016	0.008		
ppm Water	ppm	ASTM D6304	>1000	136.1	162.8	82.6		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2		
Particles >4µm		ASTM D7647	>10000	1619	129	198		
Particles >6µm		ASTM D7647	>2500	303	30	56		
Particles >14µm		ASTM D7647	>320	28	2	9		
Particles >21µm		ASTM D7647	>80	8	0	2		
Particles >38µm		ASTM D7647	>20	0	0	0		
Particles >71µm		ASTM D7647	>4	0	0	0		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	18/15/12	14/12/9	15/13/10		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2		
Acid Number (AN)	mg KOH/g	ASTM D8045	0.16	0.41	0.41	0.41		



OIL ANALYSIS REPORT

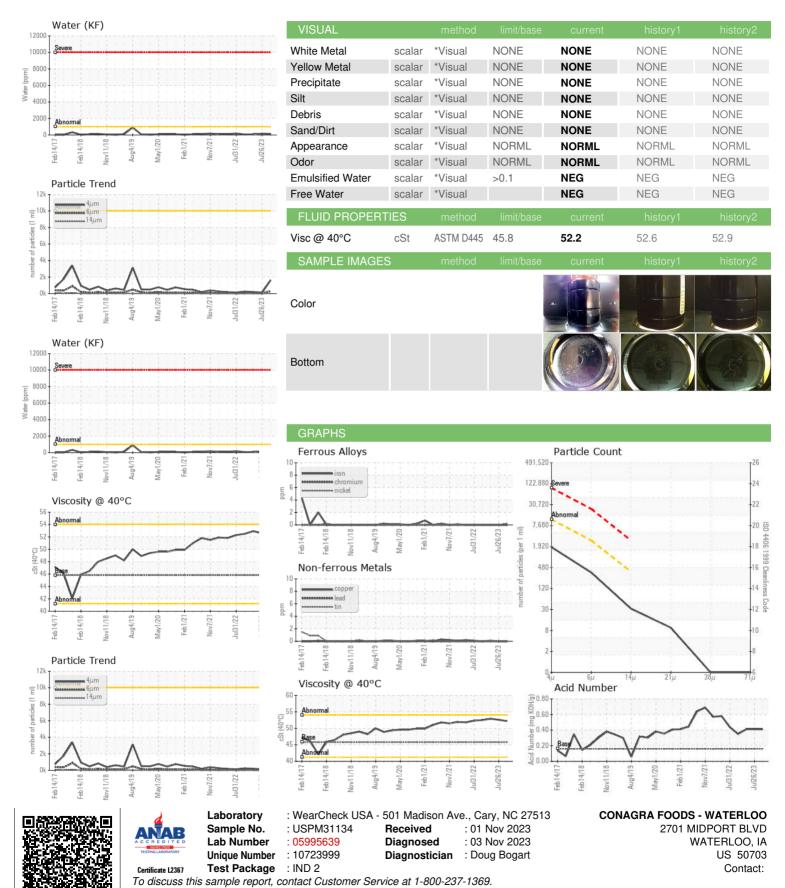

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F: