

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

Machine Id MCQUAY OU-Sports & Rec PFH087-ABBB CIRCUIT 2 (S/N 57G81019-01) Component Centrifugal Compressor Fluid

POE 46 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0618834		
Sample Date		Client Info		13 Oct 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	12		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m		<1		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>50	<1		
Lead	ppm	ASTM D5185m	>25	0		
Copper	ppm	ASTM D5185m	>100	3		
Tin	ppm	ASTM D5185m	>15	1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		0		
Calcium	ppm	ASTM D5185m		0		
Phosphorus	ppm	ASTM D5185m		0		
Zinc	ppm	ASTM D5185m		12		
	1-1-	ACTIVI DOTOCITI		12		
Sulfur	ppm	ASTM D5185m		0		
Sulfur CONTAMINANTS	ppm		limit/base			 history2
	ppm	ASTM D5185m	limit/base	0		 history2
CONTAMINANTS	ppm	ASTM D5185m method		0 current	 history1	
CONTAMINANTS Silicon	ppm ppm	ASTM D5185m method ASTM D5185m		0 current 33	 history1 	
CONTAMINANTS Silicon Sodium	ppm ppm ppm	ASTM D5185m method ASTM D5185m ASTM D5185m	>50	0 current 33 <1	 history1 	
CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m	>50 >20	0 current 33 <1 1	 history1 	
CONTAMINANTS Silicon Sodium Potassium Water	ppm ppm ppm ppm % ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304	>50 >20 >0.1	0 current 33 <1 1 0.008	 history1 	



Viscosity @ 40°C

52

> 42 40 Abnormal

38

0ct13/23


OIL ANALYSIS REPORT


scalar

*Visual

NONE

White Metal

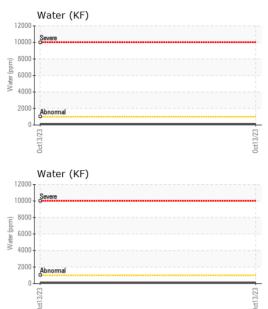

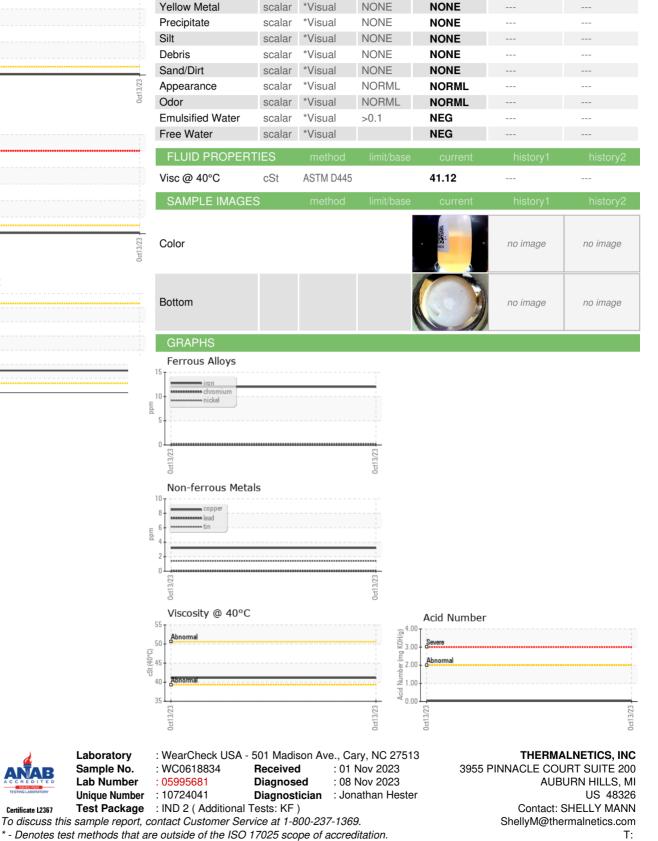

NONE

Certificate L2367

Laboratory

Sample No.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: SHELLY MANN - THEAUB

F: