




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

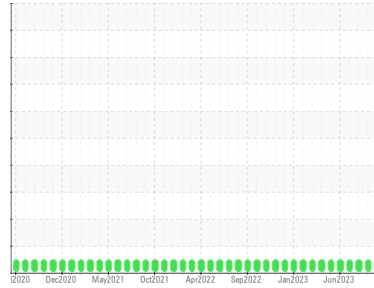

Area  
**Ohio Valley**  
 Machine Id  
**[Ohio Valley] Oil - Port Reduction Gear**  
 Component  
**Port Reduction Gear**  
 Fluid  
**GEAR OIL SAE 85W140 (180 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The water content is negligible. There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>RP0016342</b>	WC0735243	WC0735751
Sample Date	Client Info			<b>26 Oct 2023</b>	03 Sep 2023	05 Aug 2023
Machine Age	hrs	Client Info		<b>23790</b>	23107	22603
Oil Age	hrs	Client Info		<b>2002</b>	1320	815
Oil Changed	Client Info			<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>150	<b>32</b>	31	27
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m		<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>25	<b>4</b>	<1	6
Lead	ppm	ASTM D5185m	>100	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>50	<b>4</b>	2	2
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	400	<b>310</b>	279	259
Barium	ppm	ASTM D5185m	200	<b>5</b>	0	0
Molybdenum	ppm	ASTM D5185m	12	<b>&lt;1</b>	<1	<1
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	12	<b>2</b>	6	<1
Calcium	ppm	ASTM D5185m	150	<b>28</b>	34	23
Phosphorus	ppm	ASTM D5185m	1650	<b>1232</b>	982	983
Zinc	ppm	ASTM D5185m	125	<b>&lt;1</b>	8	8

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<b>5</b>	4	5
Sodium	ppm	ASTM D5185m		<b>2</b>	2	4
Potassium	ppm	ASTM D5185m	>20	<b>5</b>	6	5
Water	%	ASTM D6304	>0.1	<b>0.016</b>	0.013	0.018
ppm Water	ppm	ASTM D6304	>1000	<b>161.7</b>	133.6	189.8

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	2.00	<b>1.38</b>	1.58	1.73


VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	limited	BY: M/V OH VALLEY

# OIL ANALYSIS REPORT


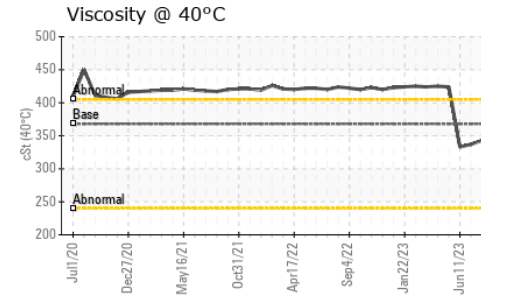
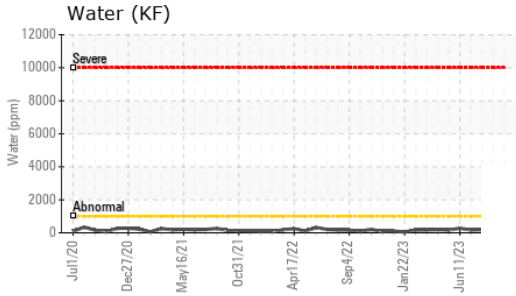
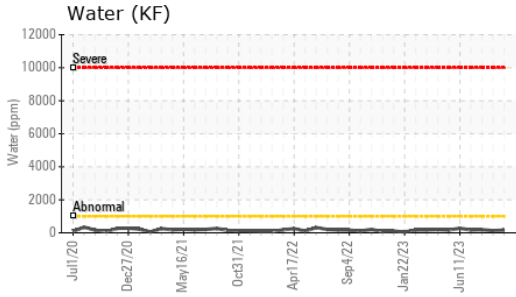


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 368	<b>337.1</b>	351	343

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

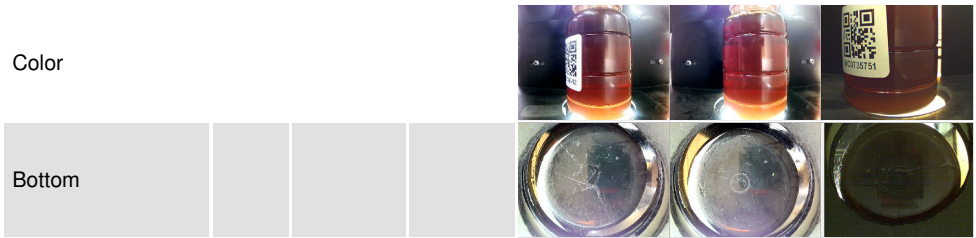

## GRAPHS

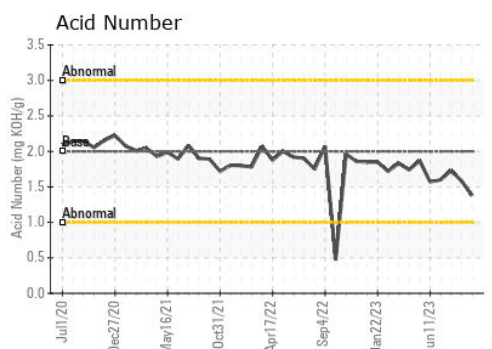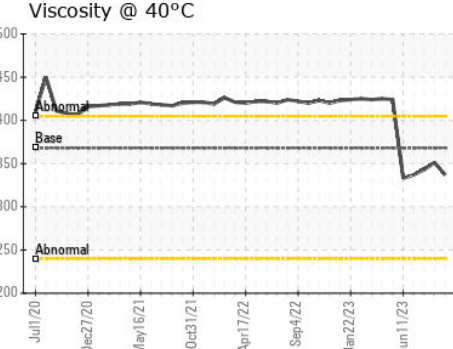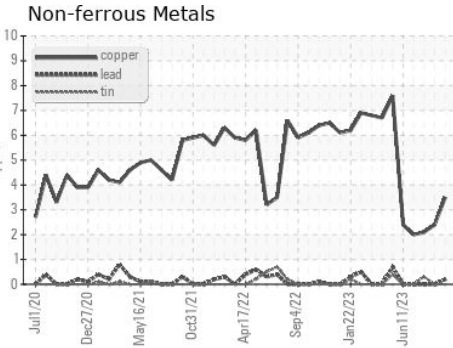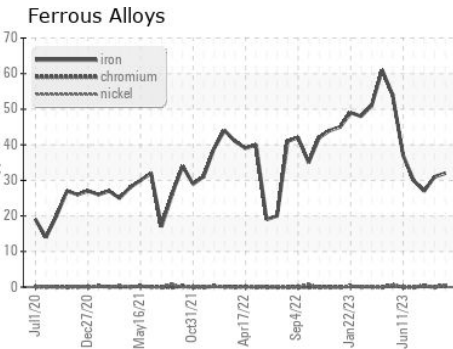

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RP0016342 **Received** : 01 Nov 2023  
**Lab Number** : **05995687** **Diagnosed** : 07 Nov 2023  
**Unique Number** : 10724047 **Diagnostician** : Jonathan Hester  
**Test Package** : IND 2

**MARATHON PETROLEUM CO.**  
 101 12TH ST  
 CATLETTSBURG, KY  
 US 41169  
 Contact: CORY GUMBERT  
 cagumbert@marathonpetroleum.com  
 T: (606)585-3950  
 F: x:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)