




# OIL ANALYSIS REPORT

Sample Rating Trend

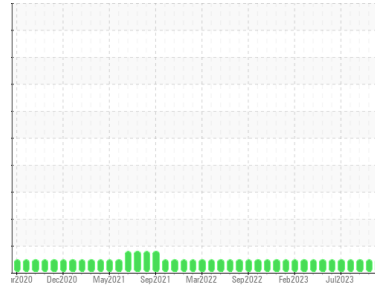

**NORMAL**



Area

**Tampa**

Machine Id

**[Tampa] Oil - Starboard Main Engine**

Component

**Starboard Main Engine**

Fluid

**MOBIL 15W40 (35 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0805337</b>	WC0769434	WC0769430
Sample Date	Client Info		<b>25 Oct 2023</b>	27 Sep 2023	30 Aug 2023
Machine Age	hrs	Client Info	<b>19532</b>	18864	18292
Oil Age	hrs	Client Info	<b>1661</b>	1017	411
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >75	<b>7</b>	3	3
Chromium	ppm	ASTM D5185m >8	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m >3	<b>1</b>	1	1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >15	<b>4</b>	1	<1
Lead	ppm	ASTM D5185m >18	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m >80	<b>13</b>	9	7
Tin	ppm	ASTM D5185m >14	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>69</b>	85	98
Barium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>83</b>	75	74
Manganese	ppm	ASTM D5185m	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>625</b>	626	601
Calcium	ppm	ASTM D5185m	<b>1517</b>	1500	1532
Phosphorus	ppm	ASTM D5185m	<b>772</b>	738	707
Zinc	ppm	ASTM D5185m	<b>940</b>	903	846
Sulfur	ppm	ASTM D5185m	<b>3453</b>	2890	3306

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>4</b>	4	14
Sodium	ppm	ASTM D5185m >118	<b>5</b>	1	2
Potassium	ppm	ASTM D5185m >20	<b>2</b>	<1	1

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0.2</b>	0.2	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.9</b>	7.7	7.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.0</b>	19.9	20.0

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>19.1</b>	17.0	16.5
Base Number (BN)	mg KOH/g	ASTM D2896	<b>12.88</b>	9.92	9.49







# OIL ANALYSIS REPORT

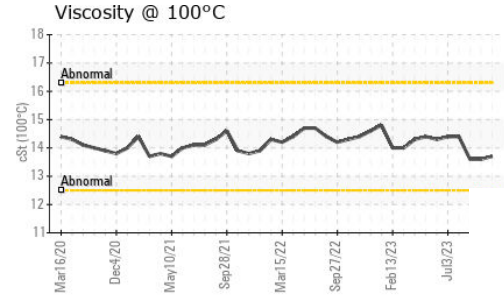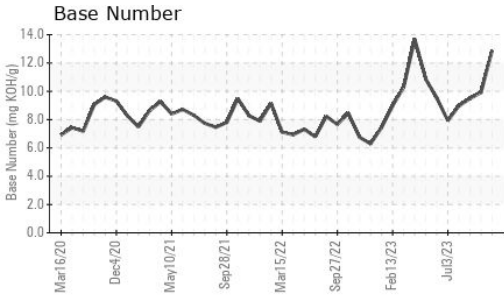

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	<b>13.7</b>	13.6	13.6

## GRAPHS

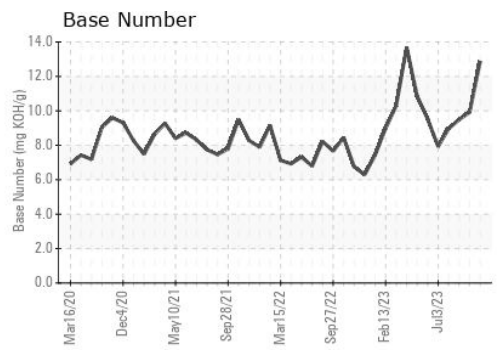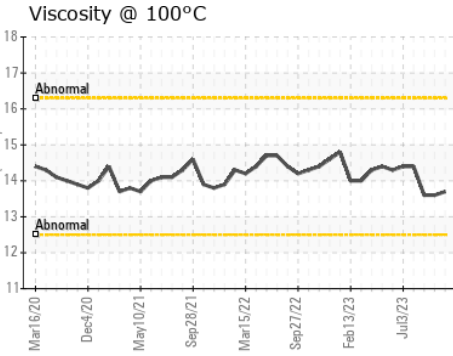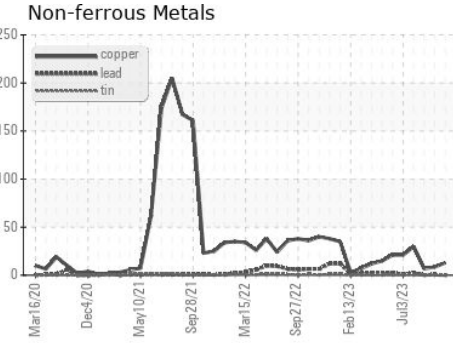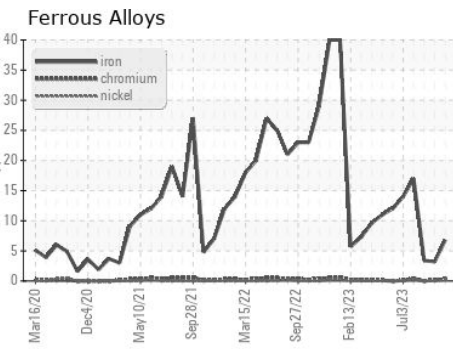

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0805337 **Received** : 01 Nov 2023  
**Lab Number** : **05995891** **Diagnosed** : 02 Nov 2023  
**Unique Number** : 10724251 **Diagnostician** : Sean Felton  
**Test Package** : IND 2 ( Additional Tests: KF )

**MARATHON PETROLEUM CO.**  
 101 12TH ST  
 CATLETTSBURG, KY  
 US 41169  
 Contact: CORY GUMBERT  
 cagumbert@marathonpetroleum.com  
 T: (606)585-3950  
 F: x:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)