



# OIL ANALYSIS REPORT

Sample Rating Trend


**NORMAL**



Machine Id  
**KENWORTH 3161**

Component  
**Front Differential**

Fluid  
**GEAR OIL SAE 75W90 (--- QTS)**

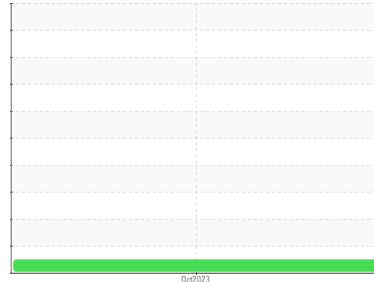

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WCMFB85647</b>	---	---
Sample Date	Client Info		<b>31 Oct 2023</b>	---	---
Machine Age	mls	Client Info	<b>107197</b>	---	---
Oil Age	mls	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>N/A</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	<b>333</b>	---	---
Chromium	ppm	ASTM D5185m >10	<b>1</b>	---	---
Nickel	ppm	ASTM D5185m >10	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m	<b>0</b>	---	---
Silver	ppm	ASTM D5185m	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >25	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185m >25	<b>0</b>	---	---
Copper	ppm	ASTM D5185m >100	<b>3</b>	---	---
Tin	ppm	ASTM D5185m >10	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 400	<b>244</b>	---	---
Barium	ppm	ASTM D5185m 200	<b>1</b>	---	---
Molybdenum	ppm	ASTM D5185m 12	<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185m	<b>10</b>	---	---
Magnesium	ppm	ASTM D5185m 12	<b>&lt;1</b>	---	---
Calcium	ppm	ASTM D5185m 150	<b>7</b>	---	---
Phosphorus	ppm	ASTM D5185m 1650	<b>1362</b>	---	---
Zinc	ppm	ASTM D5185m 125	<b>7</b>	---	---
Sulfur	ppm	ASTM D5185m 22500	<b>29422</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	<b>14</b>	---	---
Sodium	ppm	ASTM D5185m	<b>3</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>2</b>	---	---

## VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual >.2	<b>NEG</b>	---	---
Free Water	scalar	*Visual	<b>NEG</b>	---	---

## FLUID PROPERTIES

	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 109	<b>94.8</b>	---	---






# OIL ANALYSIS REPORT

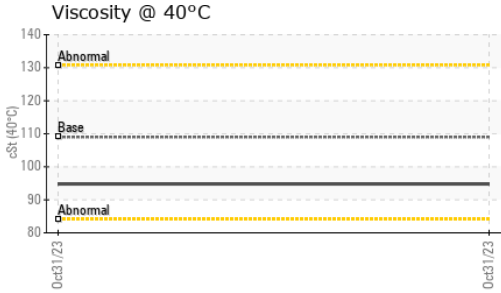

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

## GRAPHS

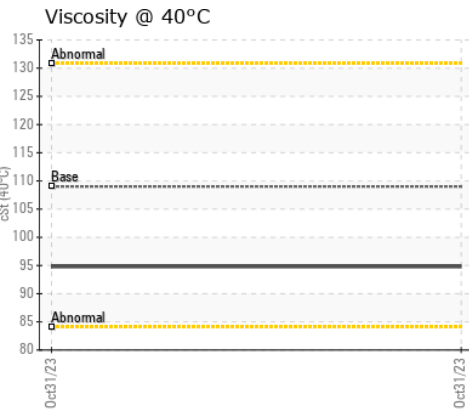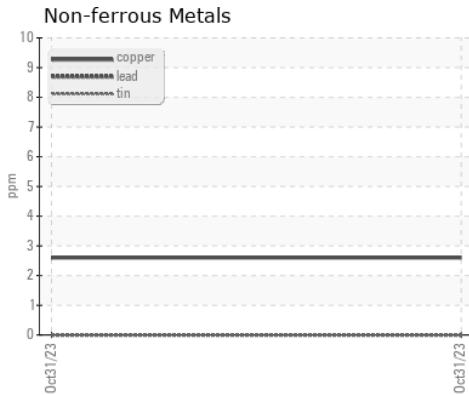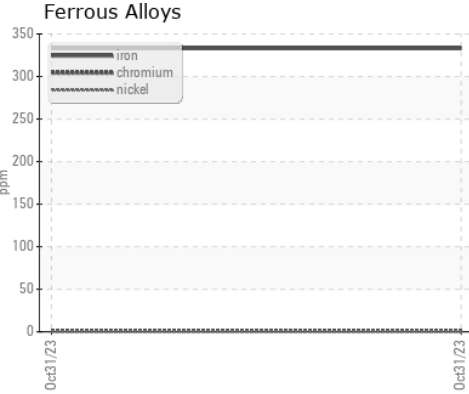

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WCMFB85647  
**Lab Number** : 05996022  
**Unique Number** : 10724382  
**Test Package** : FLEET

**Received** : 01 Nov 2023  
**Diagnosed** : 03 Nov 2023  
**Diagnostician** : Don Baldrige

**LTI/MILKY WAY - MOUNT VERNON**  
 3814 OLD HWY 99 S RD  
 MOUNT VERNON, WA  
 US 98273  
 Contact: JOHN VAN WINGERDEN  
 jvw@lynden.com  
 T: (360)354-2101  
 F: (360)354-3571

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)