

# **PROBLEM SUMMARY**


#### Sample Rating Trend


### WEAR

# KENWORTH 3161

Component Transmission (Manual) Fluid NOT GIVEN (--- QTS)

### COMPONENT CONDITION SUMMARY

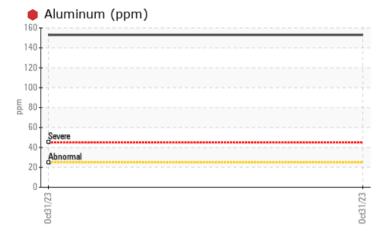

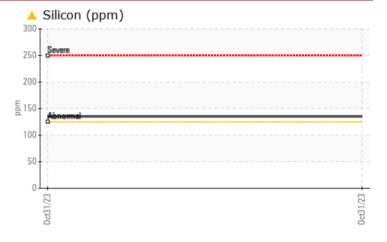

#### RECOMMENDATION

No corrective action is recommended at this time. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS								
Sample Status				SEVERE				
Aluminum	ppm	ASTM D5185m	>25	🛑 153				
Silicon	ppm	ASTM D5185m	>125	<b>1</b> 35				

Customer Id: LTILYN Sample No.: WCMFB85535 Lab Number: 05996097 Test Package: FLEET



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Don Baldridge +1 <u>don.b505@comcast.net</u>

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

RECOMMENDED ACTIONS					
Action	Status	Date	Done By	Description	
Resample			?	We recommend an early resample to monitor this condition.	

HISTORICAL DIAGNOSIS



## **OIL ANALYSIS REPORT**

Sample Rating Trend

WEAR

X

#### Machine Id **KENWORTH 3161** Component

**Transmission (Manual)** Fluid NOT GIVEN (--- QTS)

#### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. We recommend an early resample to monitor this condition.

#### 🛡 Wear

The aluminum level is abnormal. All other component wear rates are normal.

#### Contamination

Elemental level of silicon (Si) above normal indicating ingress of dirt/seal material.

#### Fluid Condition


The condition of the fluid is acceptable for the time in service.

SAMPLE INFORM	1ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WCMFB85535		
Sample Date		Client Info		31 Oct 2023		
Machine Age	mls	Client Info		107197		
Oil Age	mls	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				SEVERE		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	90		
Chromium	ppm	ASTM D5185m	>5	<1		
Nickel	ppm	ASTM D5185m	>5	0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m	>7	0		
Aluminum	ppm	ASTM D5185m	>25	🛑 153		
Lead	ppm	ASTM D5185m	>45	0		
Copper	ppm	ASTM D5185m	>225	16		
Tin	ppm	ASTM D5185m	>10	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		248		
Barium	ppm	ASTM D5185m		4		
Molybdenum	ppm	ASTM D5185m		<1		
Manganese	ppm	ASTM D5185m		5		
Magnesium	ppm	ASTM D5185m		2		
Calcium	ppm	ASTM D5185m		55		
Phosphorus	ppm	ASTM D5185m		1112		
Zinc	ppm	ASTM D5185m		17		
Sulfur	ppm	ASTM D5185m		3175		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>125	<b>1</b> 35		
Sodium	ppm	ASTM D5185m		9		
Potassium	ppm	ASTM D5185m	>20	4		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.1	NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		85.9		
07:18) Rev: 1		-	Contac	t/Location: JOH	IN VAN WINGE	RDEN - LTILY

Report Id: LTILYN [WUSCAR] 05996097 (Generated: 11/03/2023 12:07:18) Rev: 1



# **OIL ANALYSIS REPORT**

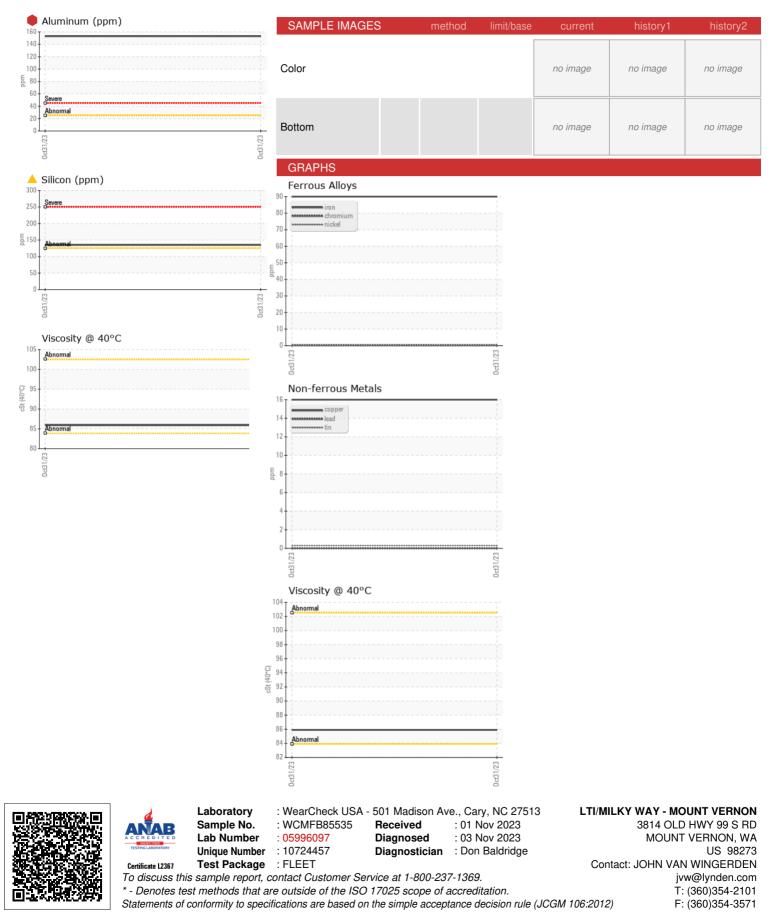

Contact/Location: JOHN VAN WINGERDEN - LTILYN