




# OIL ANALYSIS REPORT

Sample Rating Trend

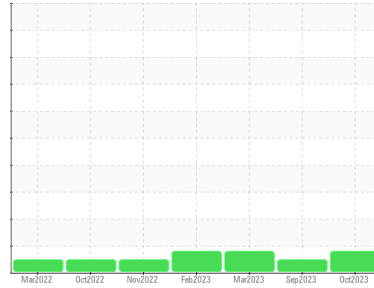

ISO



Area  
**GUAY SON [CONHER]**  
 Machine Id  
**IBACO BM ISMAR 6**  
 Component  
**Transmission (Manual)**  
 Fluid  
**Xtra Rev 15W40 (60 LTR)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the fluid.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>KL0013347</b>	KL0012817	KL0011413
Sample Date	Client Info	<b>21 Oct 2023</b>	16 Sep 2023	30 Mar 2023
Machine Age	hrs	<b>14208</b>	13737	13732
Oil Age	hrs	<b>471</b>	5	1595
Oil Changed	Client Info	<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status		<b>ABNORMAL</b>	NORMAL	ABNORMAL

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >200	<b>9</b>	14	13
Chromium	ppm	ASTM D5185m >5	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >7	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>&lt;1</b>	<1	<1
Lead	ppm	ASTM D5185m >45	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m >225	<b>22</b>	20	16
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>10</b>	13	7
Calcium	ppm	ASTM D5185m	<b>2956</b>	3406	3322
Phosphorus	ppm	ASTM D5185m	<b>883</b>	959	950
Zinc	ppm	ASTM D5185m	<b>731</b>	855	848
Sulfur	ppm	ASTM D5185m	<b>6054</b>	7966	7706

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >125	<b>6</b>	6	6
Sodium	ppm	ASTM D5185m	<b>2</b>	1	<1
Potassium	ppm	ASTM D5185m >20	<b>2</b>	<1	0





## FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	<b>120774</b>	2445	46213
Particles >6µm	ASTM D7647 >2500	<b>58800</b>	1332	<b>5212</b>
Particles >14µm	ASTM D7647 >320	<b>208</b>	227	171
Particles >21µm	ASTM D7647 >80	<b>37</b>	76	22
Particles >38µm	ASTM D7647 >20	<b>1</b>	12	1
Particles >71µm	ASTM D7647 >4	<b>0</b>	1	0
Oil Cleanliness	ISO 4406 (c) >18/15	<b>23/15</b>	18/15	<b>20/15</b>

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.60</b>	1.61	0.671

# OIL ANALYSIS REPORT


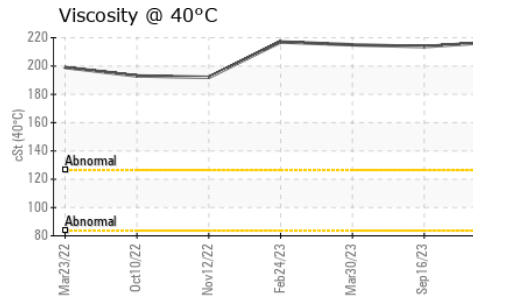
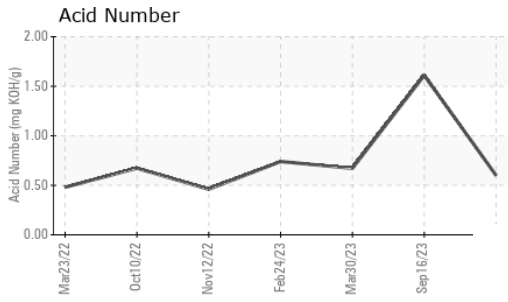
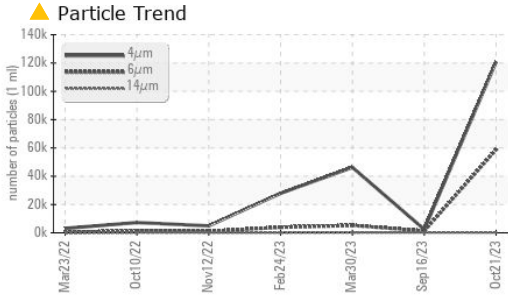
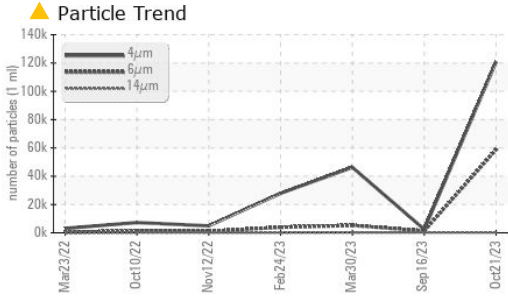


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	217	213.7	215

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	
Bottom				no image	

## GRAPHS

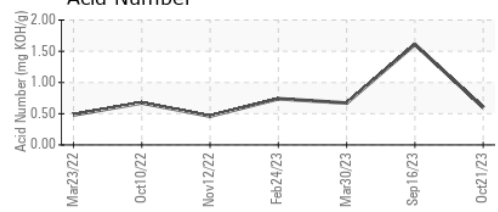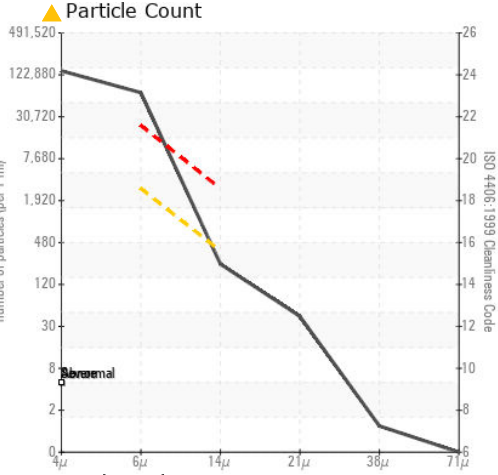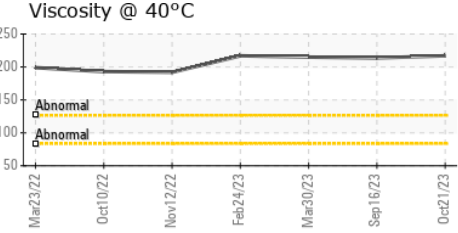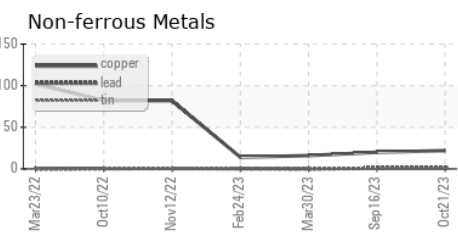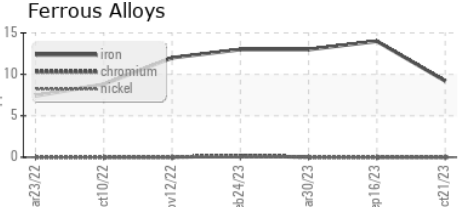

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KL0013347  
**Lab Number** : 05996261  
**Unique Number** : 10724621  
**Test Package** : MOB 2 ( Additional Tests: PrtCount )

**Received** : 01 Nov 2023  
**Diagnosed** : 03 Nov 2023  
**Diagnostician** : Don Baldrige

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**CONOR**  
 JUAREZ 348  
 HERMOSILLO,  
 MX 83140  
 Contact: EDUARDO GARCIA  
 egarcia.comsa@gmail.com  
 T: (526)622-1581 x:81  
 F: x: