




OIL ANALYSIS REPORT

Sample Rating Trend

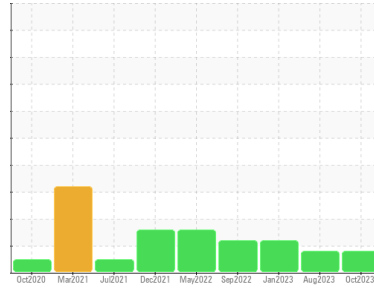

ISO



Area
DICK LAVY
Machine Id
DICK LAVY 4818
Component
Transmission
Fluid
NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the fluid.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0853946	WC0853947	WC0771199
Sample Date	Client Info		02 Oct 2023	15 Aug 2023	25 Jan 2023
Machine Age	mls	Client Info	363954	345742	286910
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ATTENTION	ATTENTION	ABNORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	29	28	32
Chromium	ppm	ASTM D5185m >10	0	0	<1
Nickel	ppm	ASTM D5185m	0	0	0
Titanium	ppm	ASTM D5185m	<1	<1	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >50	3	3	5
Lead	ppm	ASTM D5185m >50	<1	0	<1
Copper	ppm	ASTM D5185m >200	22	27	52
Tin	ppm	ASTM D5185m >10	<1	<1	0
Vanadium	ppm	ASTM D5185m	<1	<1	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	1	<1	0
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	7	1	1
Manganese	ppm	ASTM D5185m	5	5	7
Magnesium	ppm	ASTM D5185m	2	2	2
Calcium	ppm	ASTM D5185m	562	572	644
Phosphorus	ppm	ASTM D5185m	488	482	554
Zinc	ppm	ASTM D5185m	40	39	40
Sulfur	ppm	ASTM D5185m	2975	2878	4339

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	42	42	48
Sodium	ppm	ASTM D5185m	2	2	<1
Potassium	ppm	ASTM D5185m >20	4	3	<1
Water	%	ASTM D6304 >0.1	0.023	0.026	0.003
ppm Water	ppm	ASTM D6304 >1000	233.6	260.7	35.4

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	▲ 15945	▲ 14043	▲ 77217
Particles >6µm	ASTM D7647	>2500	1188	1605	▲ 5128
Particles >14µm	ASTM D7647	>320	12	58	35
Particles >21µm	ASTM D7647	>80	1	15	5
Particles >38µm	ASTM D7647	>20	0	1	0
Particles >71µm	ASTM D7647	>4	0	0	0
Oil Cleanliness	ISO 4406 (c)	>20/18/15	▲ 21/17/11	▲ 21/18/13	▲ 23/20/12


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.43	0.41	0.35




OIL ANALYSIS REPORT


Particle Trend

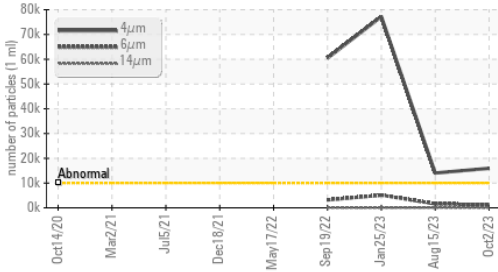


Water (KF)

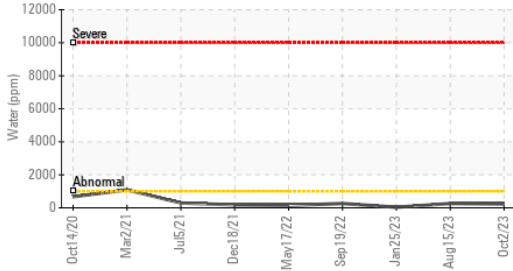


Viscosity @ 100°C

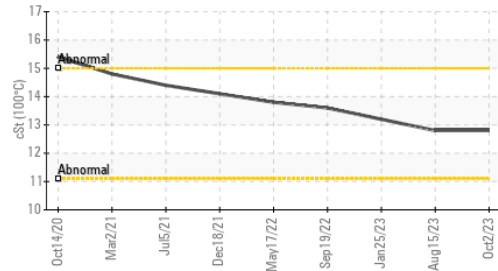

Water (KF)

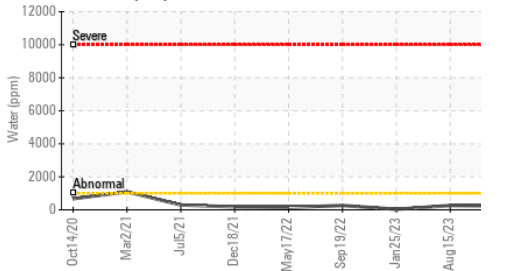


Viscosity @ 100°C

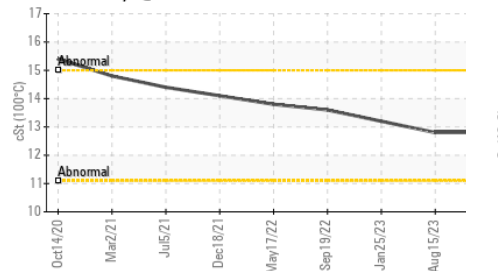

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	81.1	81.0	84.5
Visc @ 100°C	cSt	ASTM D445	12.8	12.8	13.2
Viscosity Index (VI)	Scale	ASTM D2270	157	157	157

SAMPLE IMAGES

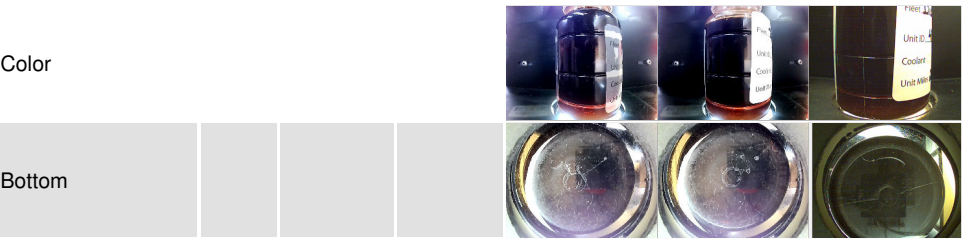


GRAPHS


Ferrous Alloys

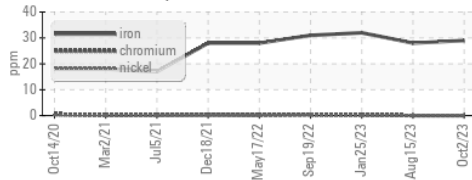


Non-ferrous Metals

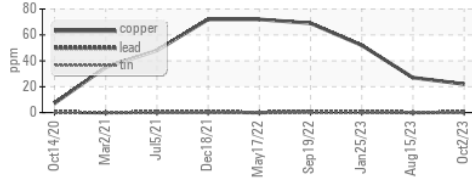


Viscosity @ 40°C

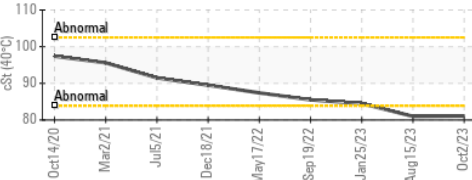

Particle Count

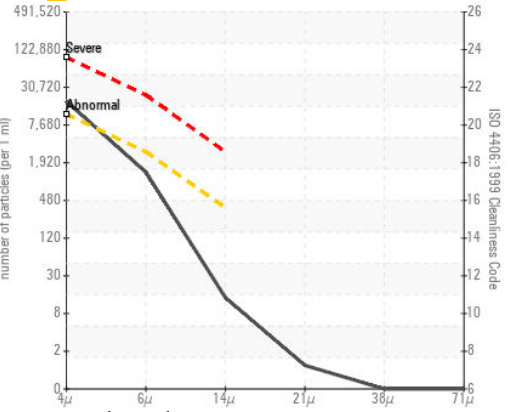

Acid Number

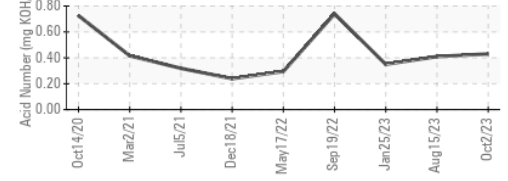

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0853946 **Received** : 01 Nov 2023
Lab Number : 05996285 **Diagnosed** : 03 Nov 2023
Unique Number : 10724645 **Diagnostician** : Don Baldrige
Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)

BASF - GIANNA CREDAROLI
 500 WHITE PLAINS RD
 TARRYTOWN, NY
 US 10591
 Contact: GIANNA CREDAROLI
 gianna.credaroli@basf.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)