




# OIL ANALYSIS REPORT

Sample Rating Trend

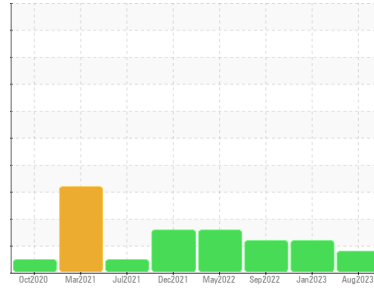

ISO



Area  
**DICK LAVY**  
 Machine Id  
**DICK LAVY 4818**  
 Component  
**Transmission**  
 Fluid  
**NOT GIVEN (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the fluid.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0853947</b>	WC0771199	WC0751676
Sample Date	Client Info		<b>15 Aug 2023</b>	25 Jan 2023	19 Sep 2022
Machine Age	mls	Client Info	<b>345742</b>	286910	241689
Oil Age	mls	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ATTENTION</b>	ABNORMAL	ABNORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	<b>28</b>	32	31
Chromium	ppm	ASTM D5185m >10	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >50	<b>3</b>	5	3
Lead	ppm	ASTM D5185m >50	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m >200	<b>27</b>	52	69
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>&lt;1</b>	0	3
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>1</b>	1	1
Manganese	ppm	ASTM D5185m	<b>5</b>	7	6
Magnesium	ppm	ASTM D5185m	<b>2</b>	2	2
Calcium	ppm	ASTM D5185m	<b>572</b>	644	678
Phosphorus	ppm	ASTM D5185m	<b>482</b>	554	524
Zinc	ppm	ASTM D5185m	<b>39</b>	40	4
Sulfur	ppm	ASTM D5185m	<b>2878</b>	4339	3480

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	<b>42</b>	48	49
Sodium	ppm	ASTM D5185m	<b>2</b>	<1	<1
Potassium	ppm	ASTM D5185m >20	<b>3</b>	<1	0
Water	%	ASTM D6304 >0.1	<b>0.026</b>	0.003	0.026
ppm Water	ppm	ASTM D6304 >1000	<b>260.7</b>	35.4	263.3

## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	<b>▲ 14043</b>	▲ 77217	▲ 60414
Particles >6µm	ASTM D7647	>2500	<b>1605</b>	▲ 5128	▲ 3192
Particles >14µm	ASTM D7647	>320	<b>58</b>	35	52
Particles >21µm	ASTM D7647	>80	<b>15</b>	5	9
Particles >38µm	ASTM D7647	>20	<b>1</b>	0	0
Particles >71µm	ASTM D7647	>4	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>20/18/15	<b>▲ 21/18/13</b>	▲ 23/20/12	▲ 23/19/13


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.41</b>	0.35	0.74




# OIL ANALYSIS REPORT


### Particle Trend

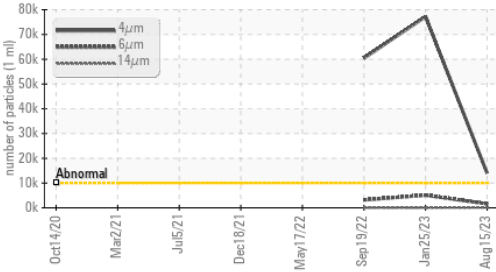


### Water (KF)

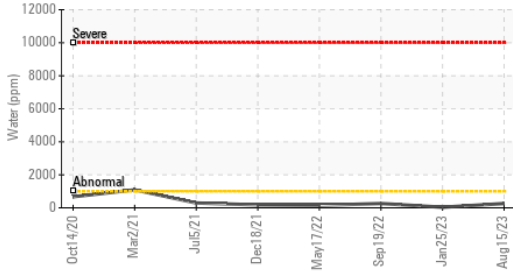


### Viscosity @ 100°C

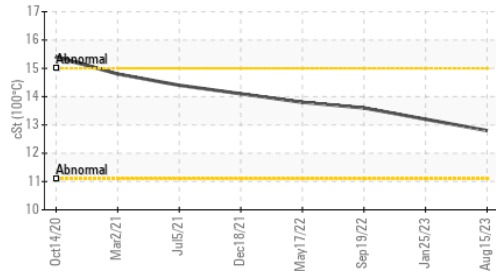

### Water (KF)

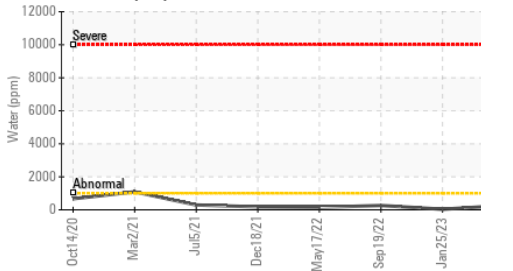


### Viscosity @ 100°C

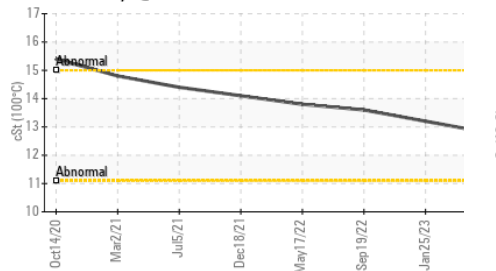

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	81.0	84.5	85.5
Visc @ 100°C	cSt	ASTM D445	12.8	13.2	13.6
Viscosity Index (VI)	Scale	ASTM D2270	157	157	162

### SAMPLE IMAGES

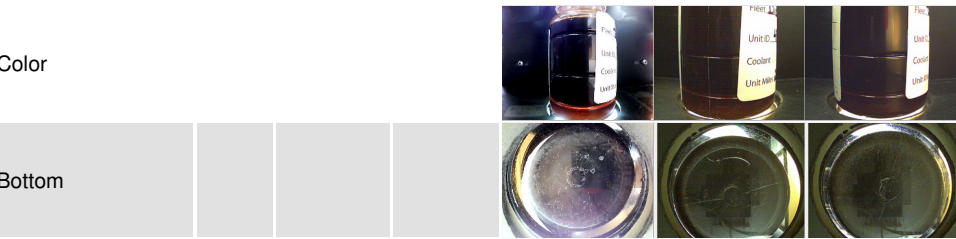


### GRAPHS


#### Ferrous Alloys

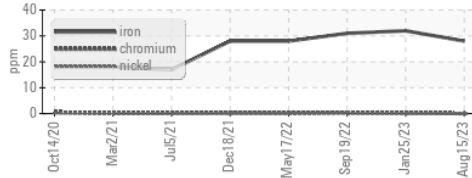


#### Non-ferrous Metals

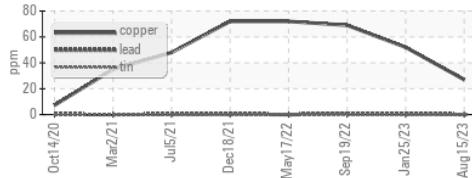


#### Viscosity @ 40°C

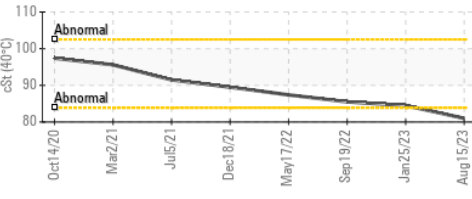

#### Particle Count

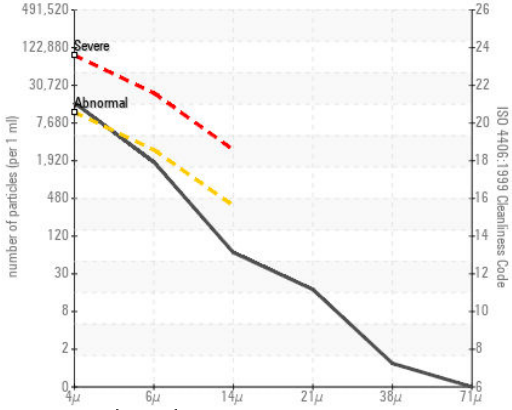

#### Acid Number

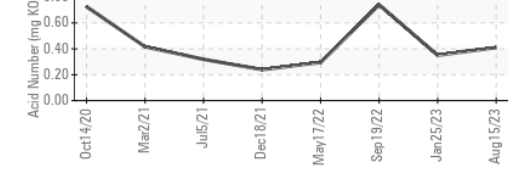

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0853947  
**Lab Number** : 05996286  
**Unique Number** : 10724646  
**Test Package** : MOB 2 ( Additional Tests: KF, KV100, PrtCount, VI )

**BASF - GIANNA CREDAROLI**  
 500 WHITE PLAINS RD  
 TARRYTOWN, NY  
 US 10591

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: GIANNA CREDAROLI  
 gianna.credaroli@basf.com  
 T:  
 F: