


# PROBLEM SUMMARY

## Sample Rating Trend



ISO

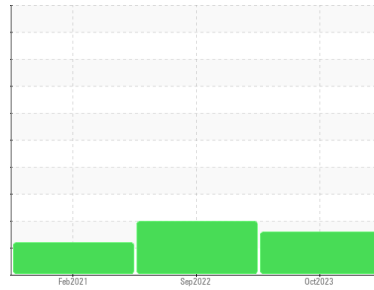


Machine Id  
**3057932 (S/N 1267)**

Component  
**Compressor**

Fluid  
**KAESER SIGMA (OEM) M-460 (--- GAL)**

## COMPONENT CONDITION SUMMARY

### ▲ Particle Trend

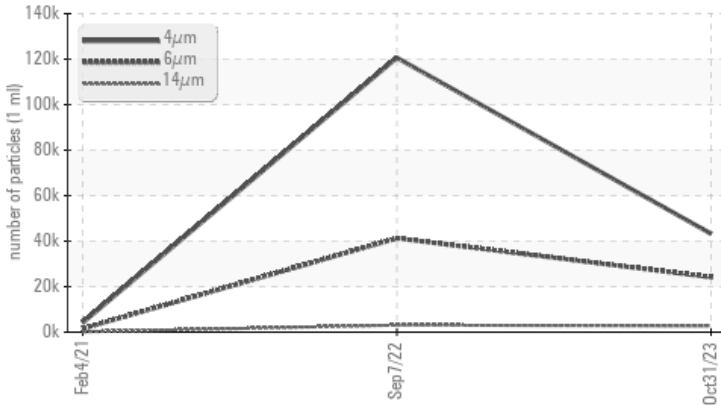

## RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

| Sample Status   |              |           | ABNORMAL          | ABNORMAL   | ATTENTION |
|-----------------|--------------|-----------|-------------------|------------|-----------|
| Particles >6µm  | ASTM D7647   | >1300     | ▲ <b>24157</b>    | ▲ 41279    | ▲ 1513    |
| Particles >14µm | ASTM D7647   | >80       | ▲ <b>2744</b>     | ▲ 3071     | ▲ 138     |
| Particles >21µm | ASTM D7647   | >20       | ▲ <b>438</b>      | ▲ 690      | ▲ 32      |
| Oil Cleanliness | ISO 4406 (c) | >--/17/13 | ▲ <b>23/22/19</b> | ▲ 24/23/19 | ▲ 18/14   |

Customer Id: NEWFRA  
Sample No.: KCPA006850  
Lab Number: 05996305  
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

*There are no recommended actions for this sample.*

## HISTORICAL DIAGNOSIS

### 07 Sep 2022 Diag: Doug Bogart

ISO



No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The condition of the oil is suitable for further service.

view report



---

### 04 Feb 2021 Diag: Don Baldrige

ISO




Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



# OIL ANALYSIS REPORT

Sample Rating Trend

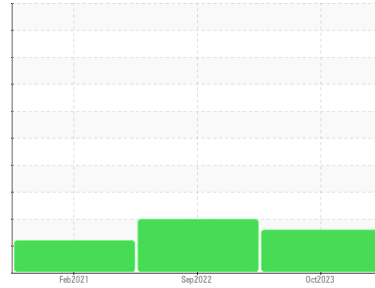

ISO



Machine Id  
**3057932 (S/N 1267)**

Component

**Compressor**

Fluid

**KAESER SIGMA (OEM) M-460 (--- GAL)**

**DIAGNOSIS**

**Recommendation**

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

There is a high amount of particulates present in the oil.

**Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1    | history2    |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number      | Client Info |             |            | <b>KCPA006850</b>  | KCP49349    | KCP27855    |
| Sample Date        | Client Info |             |            | <b>31 Oct 2023</b> | 07 Sep 2022 | 04 Feb 2021 |
| Machine Age        | hrs         | Client Info |            | <b>32086</b>       | 29721       | 26090       |
| Oil Age            | hrs         | Client Info |            | <b>0</b>           | 3631        | 3131        |
| Oil Changed        | Client Info |             |            | <b>N/A</b>         | Changed     | Changed     |
| Sample Status      |             |             |            | <b>ABNORMAL</b>    | ABNORMAL    | ATTENTION   |

| WEAR METALS |     | method      | limit/base | current      | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron        | ppm | ASTM D5185m | >50        | <b>0</b>     | <1       | <1       |
| Chromium    | ppm | ASTM D5185m | >10        | <b>0</b>     | 0        | 0        |
| Nickel      | ppm | ASTM D5185m | >3         | <b>0</b>     | 0        | 0        |
| Titanium    | ppm | ASTM D5185m | >3         | <b>0</b>     | 0        | 0        |
| Silver      | ppm | ASTM D5185m | >2         | <b>0</b>     | <1       | 0        |
| Aluminum    | ppm | ASTM D5185m | >10        | <b>0</b>     | <1       | <1       |
| Lead        | ppm | ASTM D5185m | >10        | <b>0</b>     | <1       | 0        |
| Copper      | ppm | ASTM D5185m | >50        | <b>6</b>     | 12       | 10       |
| Tin         | ppm | ASTM D5185m | >10        | <b>&lt;1</b> | <1       | <1       |
| Antimony    | ppm | ASTM D5185m |            | <b>---</b>   | ---      | 0        |
| Vanadium    | ppm | ASTM D5185m |            | <b>&lt;1</b> | 0        | 0        |
| Cadmium     | ppm | ASTM D5185m |            | <b>0</b>     | <1       | 0        |






| ADDITIVES  |     | method      | limit/base | current      | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron      | ppm | ASTM D5185m | 0          | <b>0</b>     | 0        | 12       |
| Barium     | ppm | ASTM D5185m | 90         | <b>0</b>     | 0        | 0        |
| Molybdenum | ppm | ASTM D5185m | 0          | <b>0</b>     | 0        | 0        |
| Manganese  | ppm | ASTM D5185m |            | <b>0</b>     | <1       | 0        |
| Magnesium  | ppm | ASTM D5185m | 100        | <b>41</b>    | 25       | 31       |
| Calcium    | ppm | ASTM D5185m | 0          | <b>0</b>     | <1       | 0        |
| Phosphorus | ppm | ASTM D5185m | 0          | <b>&lt;1</b> | 1        | 2        |
| Zinc       | ppm | ASTM D5185m | 0          | <b>38</b>    | 47       | 60       |
| Sulfur     | ppm | ASTM D5185m | 23500      | <b>16443</b> | 17942    | 17823    |

| CONTAMINANTS |     | method      | limit/base | current      | history1 | history2 |
|--------------|-----|-------------|------------|--------------|----------|----------|
| Silicon      | ppm | ASTM D5185m | >25        | <b>2</b>     | 7        | 10       |
| Sodium       | ppm | ASTM D5185m |            | <b>17</b>    | 10       | 5        |
| Potassium    | ppm | ASTM D5185m | >20        | <b>5</b>     | 2        | 0        |
| Water        | %   | ASTM D6304  | >0.05      | <b>0.017</b> | 0.021    | 0.015    |
| ppm Water    | ppm | ASTM D6304  | >500       | <b>178.4</b> | 216.7    | 155.9    |

| FLUID CLEANLINESS |  | method       | limit/base | current           | history1   | history2 |
|-------------------|--|--------------|------------|-------------------|------------|----------|
| Particles >4µm    |  | ASTM D7647   |            | <b>43266</b>      | 120625     | 4169     |
| Particles >6µm    |  | ASTM D7647   | >1300      | <b>▲ 24157</b>    | ▲ 41279    | ▲ 1513   |
| Particles >14µm   |  | ASTM D7647   | >80        | <b>▲ 2744</b>     | ▲ 3071     | ▲ 138    |
| Particles >21µm   |  | ASTM D7647   | >20        | <b>▲ 438</b>      | ▲ 690      | ▲ 32     |
| Particles >38µm   |  | ASTM D7647   | >4         | <b>3</b>          | ▲ 10       | 2        |
| Particles >71µm   |  | ASTM D7647   | >3         | <b>0</b>          | 0          | 0        |
| Oil Cleanliness   |  | ISO 4406 (c) | >--/17/13  | <b>▲ 23/22/19</b> | ▲ 24/23/19 | ▲ 18/14  |

| FLUID DEGRADATION |          | method     | limit/base | current     | history1 | history2 |
|-------------------|----------|------------|------------|-------------|----------|----------|
| Acid Number (AN)  | mg KOH/g | ASTM D8045 | 1.0        | <b>0.31</b> | 0.37     | 0.381    |

# OIL ANALYSIS REPORT

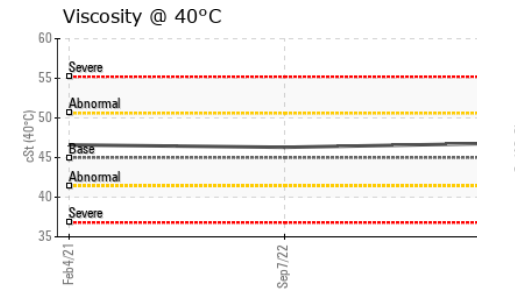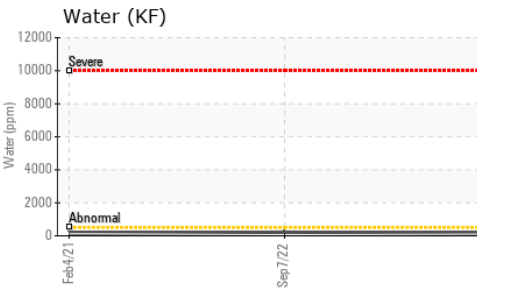
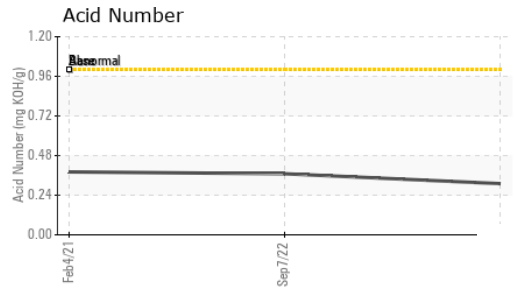
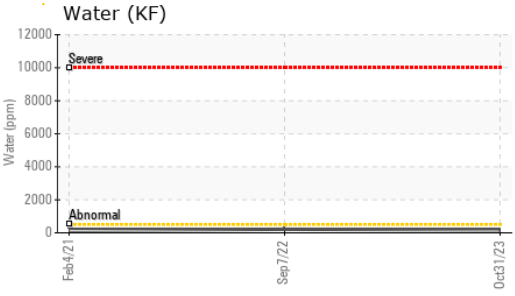
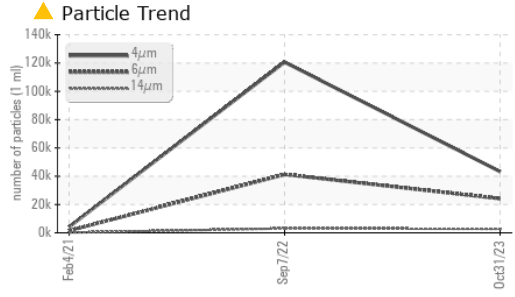


| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.05   | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base   | current | history1 | history2 |
|------------------|--------|--------------|---------|----------|----------|
| Visc @ 40°C      | cSt    | ASTM D445 45 | 46.8    | 46.3     | 46.6     |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
| Color         |        |            |         |          |          |
| Bottom        |        |            |         |          |          |

## GRAPHS

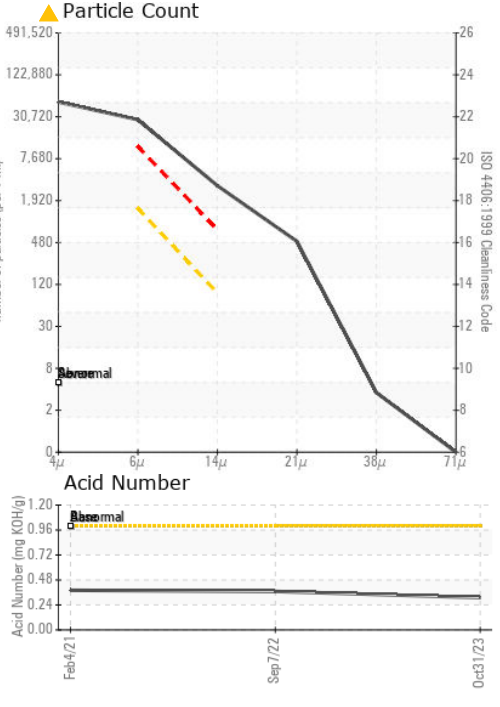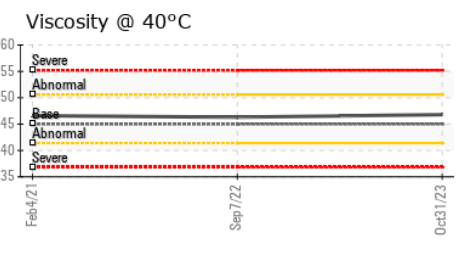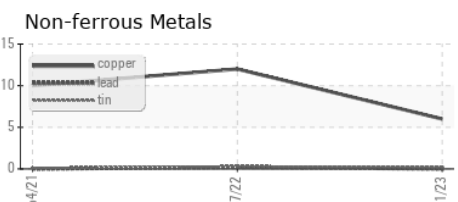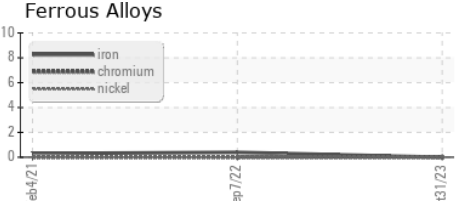

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KCPA006850 **Received** : 01 Nov 2023  
**Lab Number** : 05996305 **Diagnosed** : 03 Nov 2023  
**Unique Number** : 10724665 **Diagnostician** : Don Baldrige  
**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )

**NEW VIEW MARBLE AND GRANITE**  
 1 MASTER DR  
 FRANKLIN, MA  
 US 02038  
 Contact: Service Manager  
 newviewgranite1@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)