




#### Machine Id 7878222 (S/N 1192) Component

Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

#### COMPONENT CONDITION SUMMARY

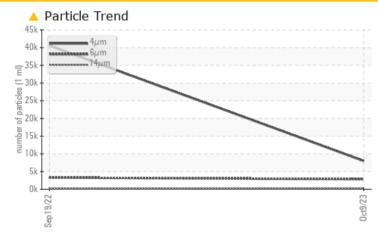

#### RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### PROBLEMATIC TEST RESULTS

THOBELIN THO TEOT	LOOLIO				
Sample Status			ABNORMAL	ABNORMAL	
Particles >6µm	ASTM D7647	>1300	<u> </u>	<b>A</b> 3286	
Particles >14µm	ASTM D7647	>80	🔺 188	<b>1</b> 50	
Particles >21µm	ASTM D7647	>20	<u> </u>	23	
Particles >38µm	ASTM D7647	>4	<u> </u>	2	
Oil Cleanliness	ISO 4406 (c)	>/17/13	<b> 20/19/15</b>	🔺 23/19/14	


Customer Id: PRIPHIPA Sample No.: KCPA006851 Lab Number: 05996307 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 don.b505@comcast.net

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

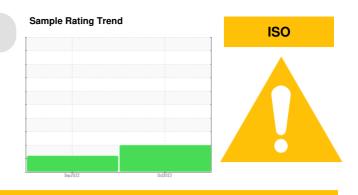

There are no recommended actions for this sample.

#### HISTORICAL DIAGNOSIS

#### 19 Sep 2022 Diag: Angela Borella



No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





## **OIL ANALYSIS REPORT**

#### Sample Rating Trend

ISO

Machine Id 7878222 (S/N 1192) Component

Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

#### DIAGNOSIS

#### A Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


			Sep2022	0ct2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA006851	KCP46305	
Sample Date		Client Info		09 Oct 2023	19 Sep 2022	
Machine Age	hrs	Client Info		882	476	
Oil Age	hrs	Client Info		0	476	
Oil Changed		Client Info		N/A	Changed	
Sample Status				ABNORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	1	
Chromium	ppm	ASTM D5185m	>10	0	0	
Nickel	ppm	ASTM D5185m	>3	0	0	
Titanium	ppm	ASTM D5185m	>3	0	0	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum	ppm	ASTM D5185m	>10	0	0	
Lead	ppm	ASTM D5185m	>10	0	<1	
Copper	ppm	ASTM D5185m		<1	1	
Tin	ppm	ASTM D5185m		<1	0	
Vanadium	ppm	ASTM D5185m	-	<1	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	
Barium	ppm	ASTM D5185m	90	18	12	
Molybdenum	ppm	ASTM D5185m	0	0	0	
Manganese	ppm	ASTM D5185m		0	<1	
Magnesium	ppm	ASTM D5185m	100	72	67	
Calcium	ppm	ASTM D5185m	0	0	2	
Phosphorus	ppm	ASTM D5185m	0	0	8	
Zinc	ppm	ASTM D5185m	0	4	7	
Sulfur	ppm	ASTM D5185m	23500	16266	21647	
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	<1	
Sodium	ppm	ASTM D5185m		12	6	
Potassium	ppm	ASTM D5185m	>20	5	4	
Water	%	ASTM D6304		0.024	0.024	
ppm Water	ppm	ASTM D6304		249.4	243.2	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		7982	40557	
Particles >6µm		ASTM D7647	>1300	<u> </u>	▲ 3286	
Particles >14µm		ASTM D7647	>80	<b>188</b>	<b>1</b> 50	
Particles >21µm		ASTM D7647	>20	<u> </u>	23	
Particles >38µm		ASTM D7647	>4	<u> </u>	2	
Particles >71µm		ASTM D7647		1	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u> </u>	▲ 23/19/14	
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.34	0.34	
	ing toring	. 10 1 11 200-10		0.07	0.0 T	


Contact/Location: JAMIE ? - PRIPHIPA




# **OIL ANALYSIS REPORT**

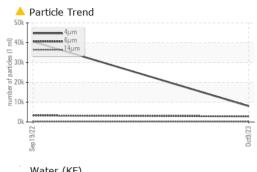

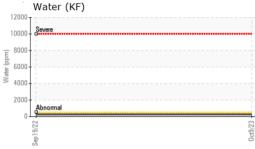

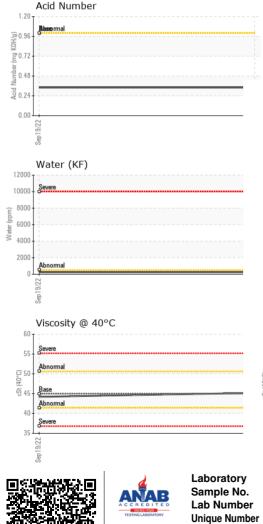

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
Precipitate	scalar	*Visual	NONE	NONE	NONE	
Silt	scalar	*Visual	NONE	NONE	NONE	
Debris	scalar	*Visual	NONE	NONE	NONE	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
Appearance	scalar	*Visual	NORML	NORML	NORML	
Odor	scalar	*Visual	NORML	NORML	NORML	
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	
Free Water	scalar	*Visual		NEG	NEG	
FLUID PROPER	TIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	45.2	44.2	
SAMPLE IMAGE	S	method	limit/base	current	history1	history2
Color						no image
Bottom						no image

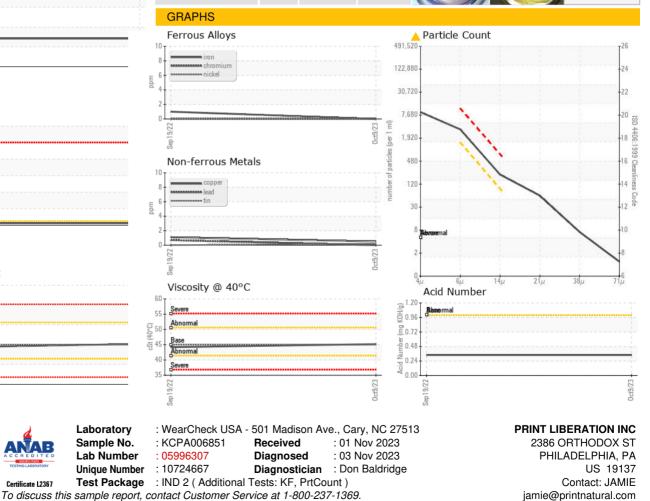

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

T:

F: