

PROBLEM SUMMARY

Sample Rating Trend




KAESER AIR CENTER SK20 4928109 (S/N 1393)

Compressor

KAESER SIGMA (OEM) M-460 (--- QTS)

COMPONENT CONDITION SUMMARY

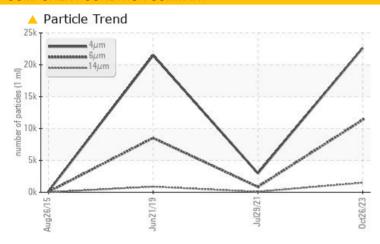

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS									
Sample Status			ABNORMAL	NORMAL	ABNORMAL				
Particles >6µm	ASTM D7647	>1300	11354	837	<u>▲</u> 8514				
Particles >14μm	ASTM D7647	>80	1498	83	<u></u> 875				
Particles >21µm	ASTM D7647	>20	△ 385	22	230				
Particles >38μm	ASTM D7647	>4	1 6	2	<u> </u>				
Oil Cleanliness	ISO 4406 (c)	>/17/13	<u>^</u> 22/21/18	17/14	<u>^</u> 20/17				

Customer Id: SOUGLA Sample No.: KCPA009145 Lab Number: 05996310 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

29 Jul 2021 Diag: Angela Borella

NORMAL



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



21 Jun 2019 Diag: Angela Borella

150



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



26 Aug 2015 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

KAESER AIR CENTER SK20 4928109 (S/N 1393)

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- QTS)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

0.11151 5 1115051		Aug201			12023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA009145	KCP41772	KCP16081
Sample Date		Client Info		26 Oct 2023	29 Jul 2021	21 Jun 2019
Machine Age	hrs	Client Info		22729	19304	15188
Oil Age	hrs	Client Info		0	1386	2600
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				ABNORMAL	NORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	<1	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	<1	0
Lead	ppm	ASTM D5185m	>10	0	<1	0
Copper	ppm	ASTM D5185m	>50	4	2	6
Tin	ppm	ASTM D5185m	>10	0	<1	<1
Antimony	ppm	ASTM D5185m			0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	15	<1
Barium	ppm	ASTM D5185m	90	8	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	<1
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m	100	42	38	30
Calcium	ppm	ASTM D5185m	0	0	0	0
Phosphorus	ppm	ASTM D5185m	0	0	8	1
Zinc	ppm	ASTM D5185m	0	15	13	15
Sulfur	ppm	ASTM D5185m	23500	16625	19249	16619
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	2	2
Sodium	ppm	ASTM D5185m		11	11	6
Potassium	ppm	ASTM D5185m	>20	4	2	<1
Water	%	ASTM D6304	>0.05	0.020	0.022	0.020
ppm Water	ppm	ASTM D6304	>500	209.1	225.5	200
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647		22622	2976	21487
Particles >6µm		ASTM D7647	>1300	<u> </u>	837	▲ 8514
Particles >14µm		ASTM D7647	>80	<u> </u>	83	▲ 875
Particles >21µm		ASTM D7647	>20	<u> </u>	22	<u>△</u> 230
Particles >38µm		ASTM D7647	>4	<u> </u>	2	<u>▲</u> 18
Particles >71µm		ASTM D7647		1	0	1
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>^</u> 22/21/18	17/14	<u>^</u> 20/17

FLUID DEGRADATION

Acid Number (AN)

method

mg KOH/g ASTM D8045 1.0

limit/base

current

0.35

history1


0.332

history2

0.367



OIL ANALYSIS REPORT

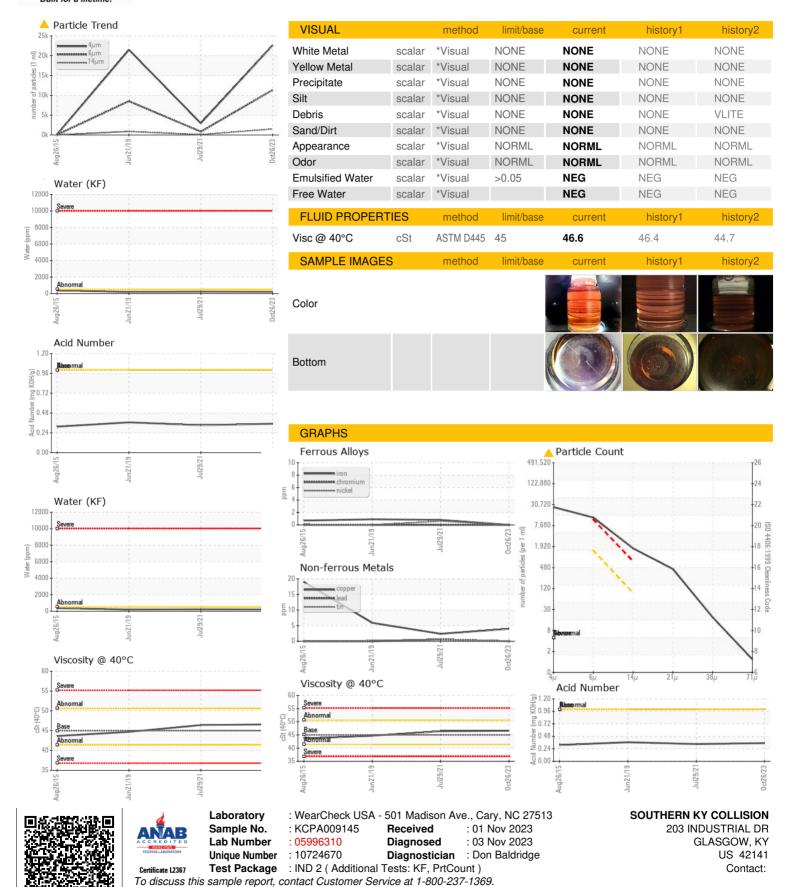

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F: