




# OIL ANALYSIS REPORT

Sample Rating Trend

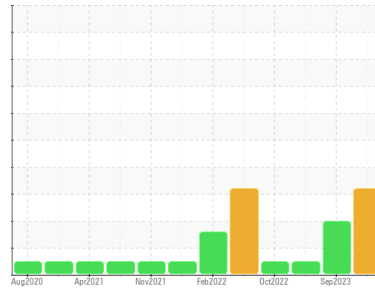

FUEL



Area  
**GUAY SON [CONHER]**  
 Machine Id  
**Máquina principal Mantito I**  
 Component  
**Auxiliary Auxiliary Engine**  
 Fluid  
**XTRA REV 15W40 (8 LTR)**

## DIAGNOSIS

### Recommendation

We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of particulates present in the oil. There is a moderate amount of fuel present in the oil.

### Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KL0013325</b>	KL0012815	KL0010244
Sample Date	Client Info		<b>24 Oct 2023</b>	16 Sep 2023	23 Feb 2023
Machine Age	hrs	Client Info	<b>16551</b>	15840	0
Oil Age	hrs	Client Info	<b>96</b>	60	0
Oil Changed	Client Info		<b>Changed</b>	Not Changd	N/A
Sample Status			<b>ABNORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>18</b>	13	28
Chromium	ppm	ASTM D5185m >20	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	<1	4
Lead	ppm	ASTM D5185m >40	<b>0</b>	1	<1
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	2	6
Tin	ppm	ASTM D5185m >15	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>70</b>	0	3
Barium	ppm	ASTM D5185m	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m	<b>13</b>	1	6
Manganese	ppm	ASTM D5185m	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>68</b>	10	6
Calcium	ppm	ASTM D5185m	<b>2213</b>	3079	2726
Phosphorus	ppm	ASTM D5185m	<b>1036</b>	972	799
Zinc	ppm	ASTM D5185m	<b>1226</b>	1132	855
Sulfur	ppm	ASTM D5185m	<b>2986</b>	6278	6806

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>7</b>	7	6
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	6
Potassium	ppm	ASTM D5185m >20	<b>2</b>	3	28
Fuel	%	ASTM D3524 >4.0	<b>▲ 7.2</b>	<1.0	<1.0


## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0</b>	0	0.6
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.2</b>	7.7	10.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.5</b>	18.3	19.2




# OIL ANALYSIS REPORT


## Fuel Dilution

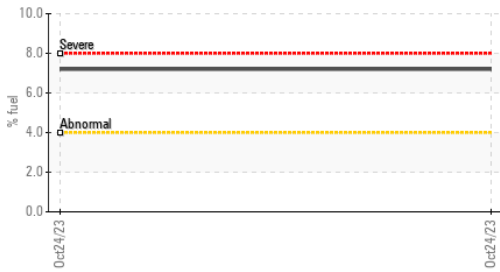


## Particle Trend

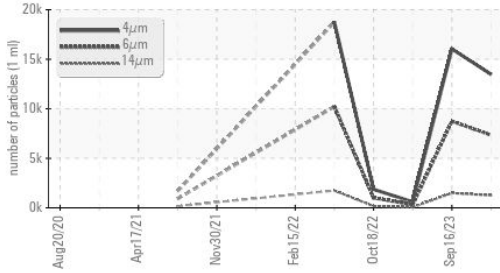


## Particle Count

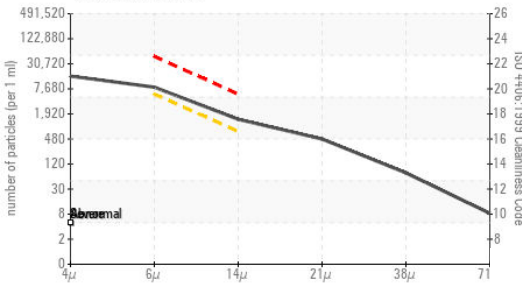

## Particle Trend

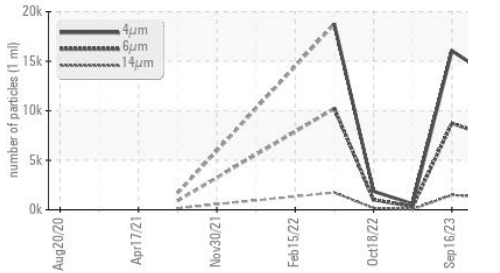

## Base Number

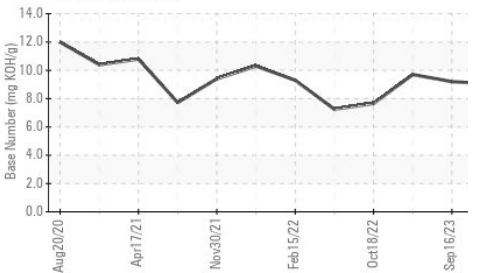

## FLUID CLEANLINESS

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>13476</b>	16042	592
Particles >6µm	ASTM D7647	>5000	<b>▲ 7341</b>	▲ 8739	322
Particles >14µm	ASTM D7647	>640	<b>▲ 1249</b>	▲ 1487	55
Particles >21µm	ASTM D7647	>160	<b>▲ 421</b>	▲ 501	18
Particles >38µm	ASTM D7647	>40	<b>▲ 65</b>	▲ 77	3
Particles >71µm	ASTM D7647	>10	<b>7</b>	8	0
Oil Cleanliness	ISO 4406 (c)	>19/16	<b>▲ 20/17</b>	▲ 20/18	16/13

## FLUID DEGRADATION

FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs./1mm	*ASTM D7414 >25	<b>18.9</b>	11.2	16.3
Base Number (BN)	mg KOH/g	ASTM D2896	<b>9.03</b>	9.20	9.7

## VISUAL


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG

## FLUID PROPERTIES


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	<b>▲ 11.1</b>	13.5	12.5

## GRAPHS


### Ferrous Alloys

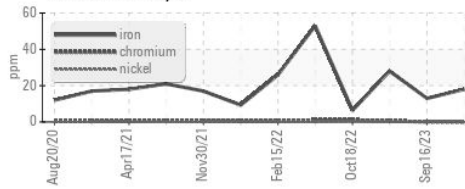


### Non-ferrous Metals

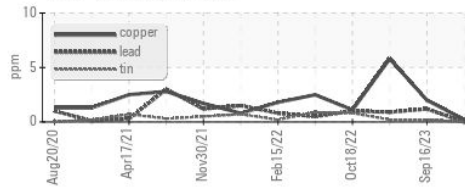


### Viscosity @ 100°C

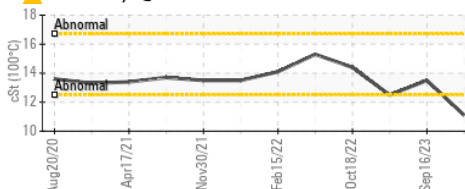

### Particle Count

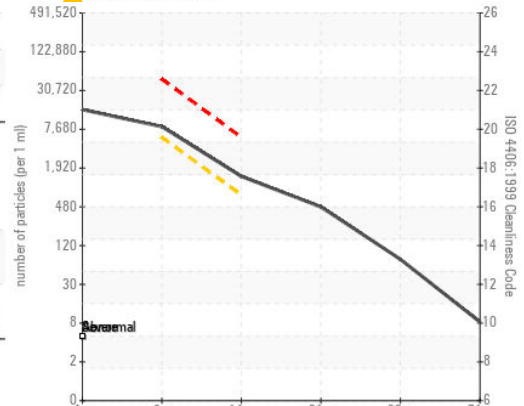

### Base Number

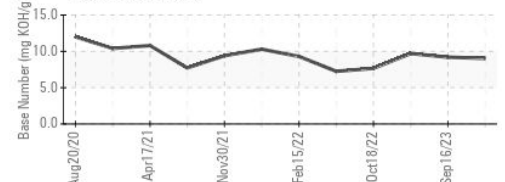

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KL0013325 **Received** : 01 Nov 2023  
**Lab Number** : 05996373 **Diagnosed** : 06 Nov 2023  
**Unique Number** : 10724733 **Diagnostician** : Jonathan Hester  
**Test Package** : MOB 2 ( Additional Tests: FuelDilution, PercentFuel, PrtCount )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**CONOR**  
 JUAREZ 348  
 HERMOSILLO,  
 MX 83140

Contact: EDUARDO GARCIA  
 egarcia.comsa@gmail.com

T: (526)622-1581 x:81

F: x: