




OIL ANALYSIS REPORT

Sample Rating Trend

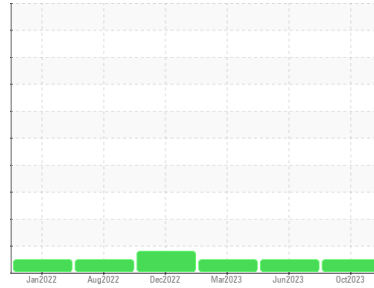

NORMAL



Machine Id
FACER 2
 Component
Hydraulic System
 Fluid
NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PTK0005027	PTK0004492	PTK0002175
Sample Date	Client Info	25 Oct 2023	20 Jun 2023	08 Mar 2023
Machine Age	hrs Client Info	0	0	0
Oil Age	hrs Client Info	0	0	0
Oil Changed	Client Info	Filtered	Filtered	N/A
Sample Status		NORMAL	NORMAL	NORMAL

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185m	>20	0	0	0
Chromium ppm ASTM D5185m	>10	<1	0	0
Nickel ppm ASTM D5185m	>10	0	0	0
Titanium ppm ASTM D5185m		0	0	0
Silver ppm ASTM D5185m		0	0	0
Aluminum ppm ASTM D5185m	>10	<1	1	0
Lead ppm ASTM D5185m	>10	0	0	0
Copper ppm ASTM D5185m	>75	3	1	1
Tin ppm ASTM D5185m	>10	0	0	0
Vanadium ppm ASTM D5185m		0	0	0
Cadmium ppm ASTM D5185m		<1	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185m		0	0	3
Barium ppm ASTM D5185m		<1	5	0
Molybdenum ppm ASTM D5185m		145	132	129
Manganese ppm ASTM D5185m		0	0	0
Magnesium ppm ASTM D5185m		1	<1	2
Calcium ppm ASTM D5185m		49	30	48
Phosphorus ppm ASTM D5185m		423	401	417
Zinc ppm ASTM D5185m		436	381	399
Sulfur ppm ASTM D5185m		1798	1610	1825

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185m	>20	2	1	2
Sodium ppm ASTM D5185m		0	0	0
Potassium ppm ASTM D5185m	>20	1	0	<1





FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm ASTM D7647		1983	2038	23812
Particles >6µm ASTM D7647	>2500	414	608	1861
Particles >14µm ASTM D7647	>320	27	63	52
Particles >21µm ASTM D7647	>80	5	17	8
Particles >38µm ASTM D7647	>20	0	1	1
Particles >71µm ASTM D7647	>4	0	1	0
Oil Cleanliness ISO 4406 (c)	>--/18/15	18/16/12	18/16/13	22/18/13

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g ASTM D8045		0.71	0.74	0.67

OIL ANALYSIS REPORT


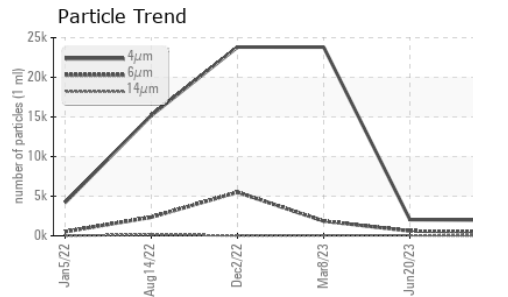
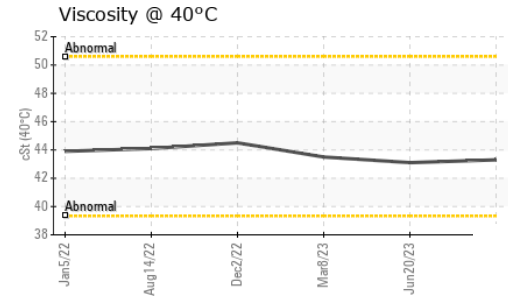
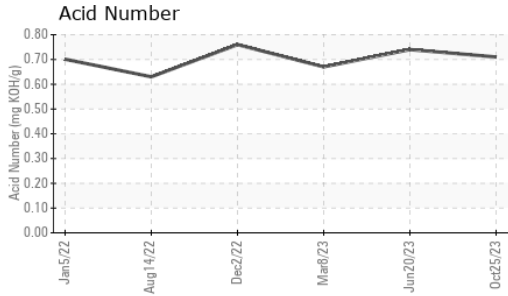
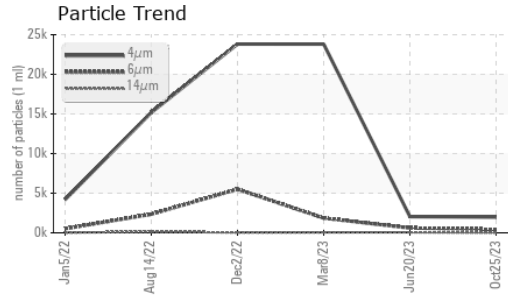


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	43.3	43.1	43.5

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

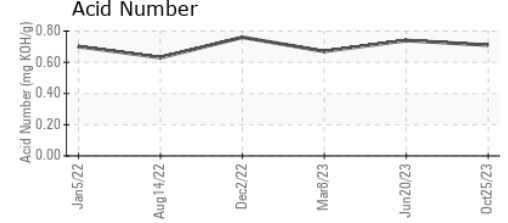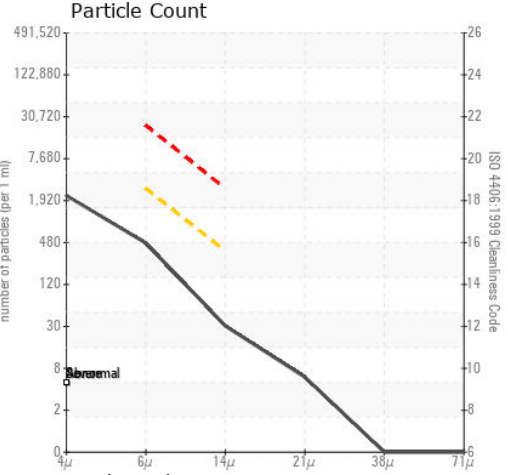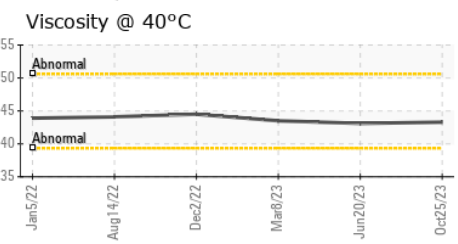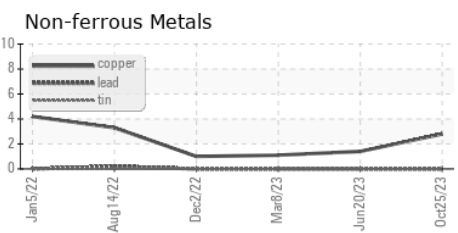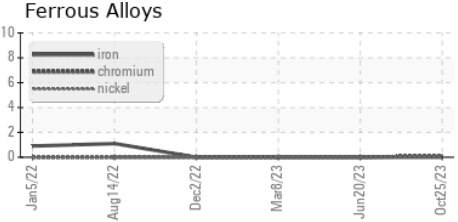

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PTK0005027 **Received** : 02 Nov 2023
Lab Number : 05996662 **Diagnosed** : 03 Nov 2023
Unique Number : 10725022 **Diagnostician** : Wes Davis
Test Package : MOB 2

LIBERTY CARTON
 870 LOUISIANA AVE S
 MINNEAPOLIS, MN
 US 55426
 Contact: BRENT WENTWORTH
 brentwentworth@libertycarton.com
 T: (763)540-9589
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)