




# PROBLEM SUMMARY


Area  
**WCLSNC**  
 Machine Id  
**QC230801HY**  
 Component  
**Hydraulic System**  
 Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (--- GAL)**

Sample Rating Trend

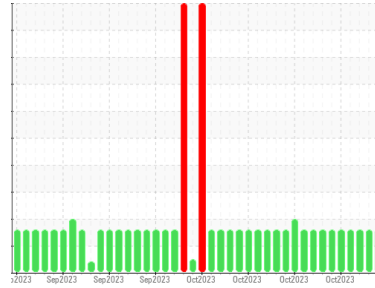

## COMPONENT CONDITION SUMMARY

▲ Particle Trend

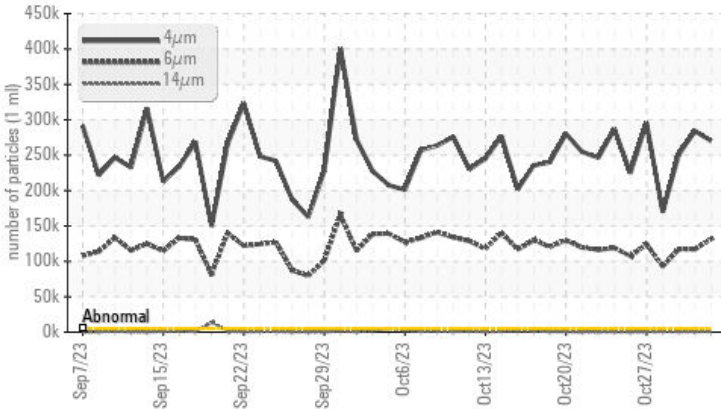

## RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status			<b>ABNORMAL</b>	ABNORMAL	ABNORMAL
Particles >4µm	ASTM D7647	>5000	▲ <b>270482</b>	▲ 283987	▲ 250855
Particles >6µm	ASTM D7647	>1300	▲ <b>131550</b>	▲ 117070	▲ 117279
Particles >14µm	ASTM D7647	>160	▲ <b>825</b>	▲ 598	▲ 661
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ <b>25/24/17</b>	▲ 25/24/16	▲ 25/24/17

Customer Id: WEACARQA  
 Sample No.: WC0877787  
 Lab Number: 05996686  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Jonathan Hester +1 919-379-4092 x4092  
[jhester@wearcheckusa.com](mailto:jhester@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.

## HISTORICAL DIAGNOSIS

### 01 Nov 2023 Diag: Jonathan Hester

ISO



We recommend you service the filters on this component. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 31 Oct 2023 Diag: Jonathan Hester

ISO



We recommend you service the filters on this component. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 30 Oct 2023 Diag: Jonathan Hester

ISO



We recommend you service the filters on this component. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





# OIL ANALYSIS REPORT

Sample Rating Trend

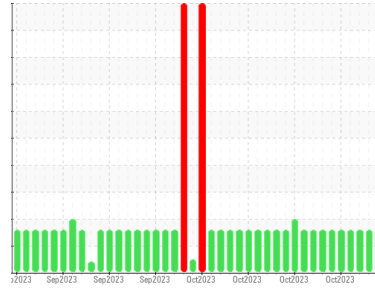

ISO



Area  
**WCLSNC**  
Machine Id  
**QC230801HY**

Component  
**Hydraulic System**  
Fluid

**JOHN DEERE HY-GARD HYD/TRANS (--- GAL)**

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0877787</b>	WC0877786	WC0865978
Sample Date	Client Info		<b>02 Nov 2023</b>	01 Nov 2023	31 Oct 2023
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## WEAR METALS

	method	limit/base	current	history1	history2	
PQ	ASTM D8184	>47	<b>36</b>	17	22	
Iron	ppm	ASTM D5185m	>78	<b>61</b>	51	53
Chromium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>3	<b>1</b>	<1	<1
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>5	<b>&lt;1</b>	2	1
Lead	ppm	ASTM D5185m	>11	<b>9</b>	9	7
Copper	ppm	ASTM D5185m	>84	<b>84</b>	69	75
Tin	ppm	ASTM D5185m	>4	<b>2</b>	2	2
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	6	<b>103</b>	91	102
Barium	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>0</b>	0	<1
Manganese	ppm	ASTM D5185m		<b>17</b>	14	14
Magnesium	ppm	ASTM D5185m	145	<b>22</b>	24	29
Calcium	ppm	ASTM D5185m	3570	<b>3561</b>	3343	3065
Phosphorus	ppm	ASTM D5185m	1290	<b>1102</b>	1115	1017
Zinc	ppm	ASTM D5185m	1640	<b>1411</b>	1402	1228
Sulfur	ppm	ASTM D5185m		<b>3889</b>	3196	2826

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>11	<b>9</b>	8	7
Sodium	ppm	ASTM D5185m	>23	<b>11</b>	16	18
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	<1	0
Water	%	ASTM D6304	>0.1669	<b>0.065</b>	0.066	0.068
ppm Water	ppm	ASTM D6304	>1669	<b>658.7</b>	661.0	685.5

## FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>▲ 270482</b>	▲ 283987	▲ 250855
Particles >6µm	ASTM D7647	>1300	<b>▲ 131550</b>	▲ 117070	▲ 117279
Particles >14µm	ASTM D7647	>160	<b>▲ 825</b>	▲ 598	▲ 661
Particles >21µm	ASTM D7647	>40	<b>19</b>	13	16
Particles >38µm	ASTM D7647	>10	<b>0</b>	1	0
Particles >71µm	ASTM D7647	>3	<b>0</b>	1	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>▲ 25/24/17</b>	▲ 25/24/16	▲ 25/24/17

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	1.8	<b>0.85</b>	0.88	0.84



# OIL ANALYSIS REPORT

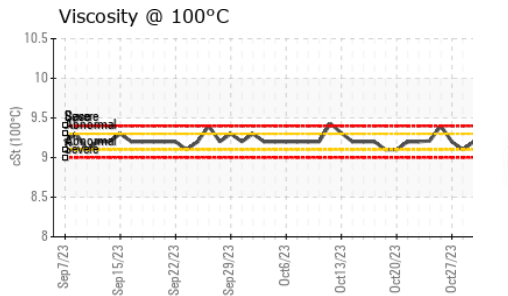
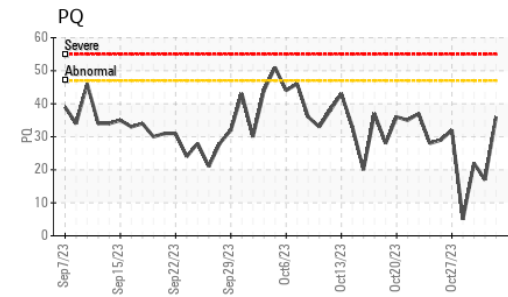
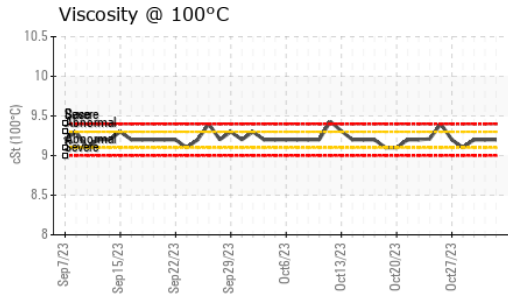
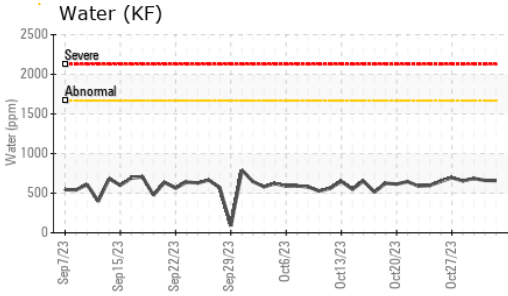
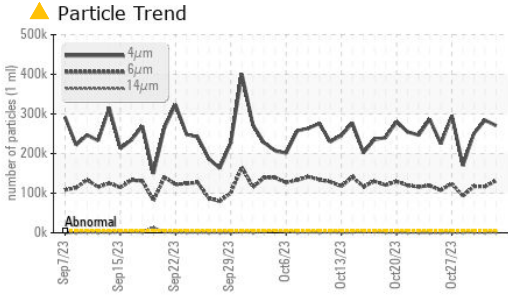


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	MODER	MODER
Debris	scalar	*Visual	NONE	HEAVY	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1669	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	57.0	62.4	62.7
Visc @ 100°C	cSt	ASTM D445	9.4	9.2	9.2
Viscosity Index (VI)	Scale	ASTM D2270	147	125	124

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

## GRAPHS

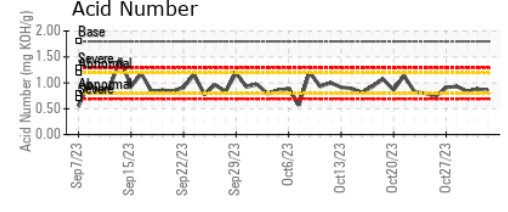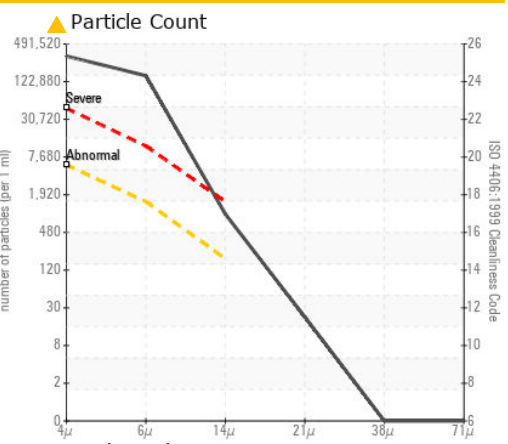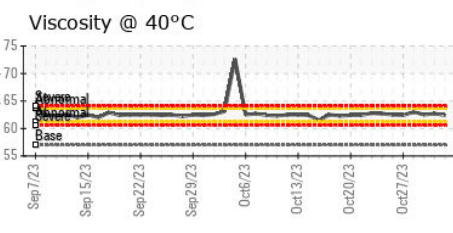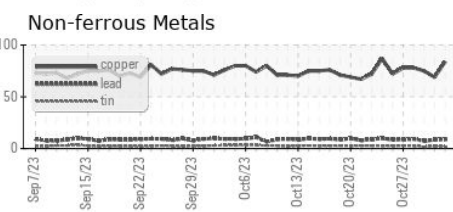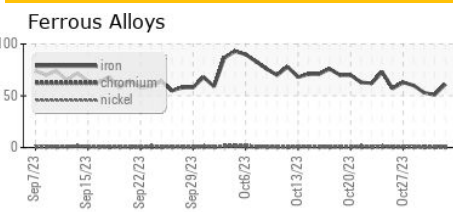

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0877787 **Received** : 02 Nov 2023  
**Lab Number** : 05996686 **Diagnosed** : 08 Nov 2023  
**Unique Number** : 10725046 **Diagnostician** : Jonathan Hester  
**Test Package** : IND 2 ( Additional Tests: KF, KV100, PQ, VI )

**WEARCHECK LUBRICATION SERVICES QA ACCOUNT**  
 501 Madison Ave  
 Cary, NC  
 US 27513  
 Contact: WCLS CARY NC

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (919)379-4102  
 F: (919)379-4050