




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

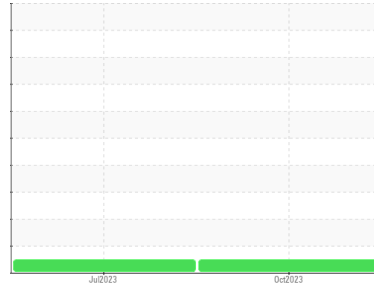

Machine Id  
**AF12-130-1060-2100 SOFT WOOD CHIP SILO HYDRAULIC UNIT**

Component  
**Hydraulic System**

Fluid  
**MOBIL DTE 10 EXCEL 46 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0862266</b>	WC0818976	---
Sample Date	Client Info		<b>26 Oct 2023</b>	10 Jul 2023	---
Machine Age	mths	Client Info	<b>66</b>	0	---
Oil Age	mths	Client Info	<b>6</b>	0	---
Oil Changed	Client Info		<b>Oil Added</b>	N/A	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184		<b>8</b>	10	---
Iron	ppm	ASTM D5185m >20	<b>0</b>	<1	---
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	---
Nickel	ppm	ASTM D5185m >20	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m	<b>0</b>	0	---
Silver	ppm	ASTM D5185m	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	---
Lead	ppm	ASTM D5185m >20	<b>1</b>	2	---
Copper	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	---
Tin	ppm	ASTM D5185m >20	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	0	---
Barium	ppm	ASTM D5185m	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	<b>0</b>	0	---
Manganese	ppm	ASTM D5185m	<b>0</b>	0	---
Magnesium	ppm	ASTM D5185m	<b>1</b>	0	---
Calcium	ppm	ASTM D5185m	<b>115</b>	114	---
Phosphorus	ppm	ASTM D5185m	<b>425</b>	448	---
Zinc	ppm	ASTM D5185m	<b>9</b>	8	---
Sulfur	ppm	ASTM D5185m	<b>1807</b>	1618	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	<b>0</b>	0	---
Sodium	ppm	ASTM D5185m	<b>0</b>	0	---
Potassium	ppm	ASTM D5185m >20	<b>2</b>	1	---
Water	%	ASTM D6304 >0.05	<b>0.004</b>	0.011	---
ppm Water	ppm	ASTM D6304 >500	<b>47.6</b>	111.7	---

## FLUID CLEANLINESS





	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>682</b>	574	---
Particles >6µm	ASTM D7647	>1300	<b>273</b>	100	---
Particles >14µm	ASTM D7647	>160	<b>49</b>	8	---
Particles >21µm	ASTM D7647	>40	<b>21</b>	3	---
Particles >38µm	ASTM D7647	>10	<b>2</b>	0	---
Particles >71µm	ASTM D7647	>3	<b>1</b>	0	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>17/15/13</b>	16/14/10	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.054</b>	0.105	---




# OIL ANALYSIS REPORT

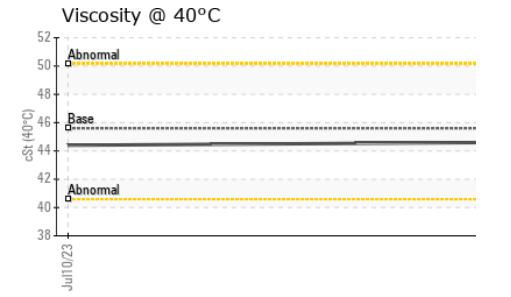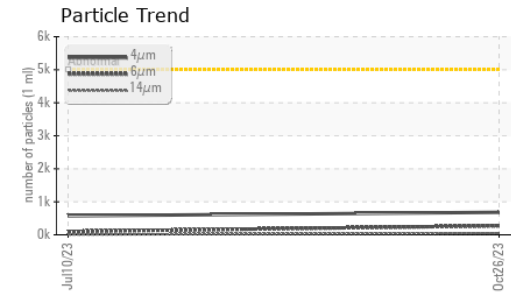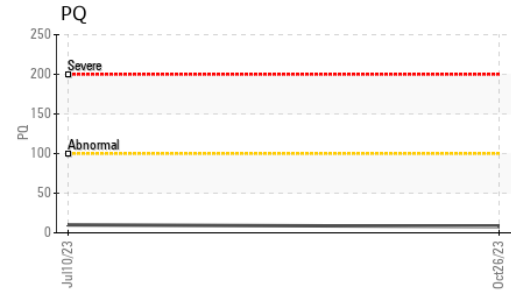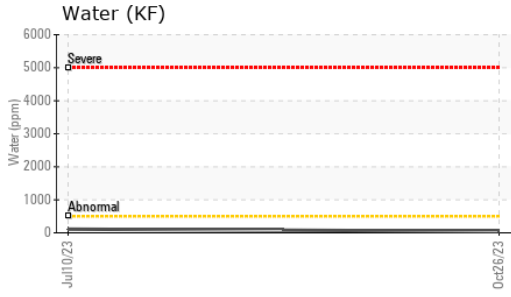






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45.6	44.6	44.4

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

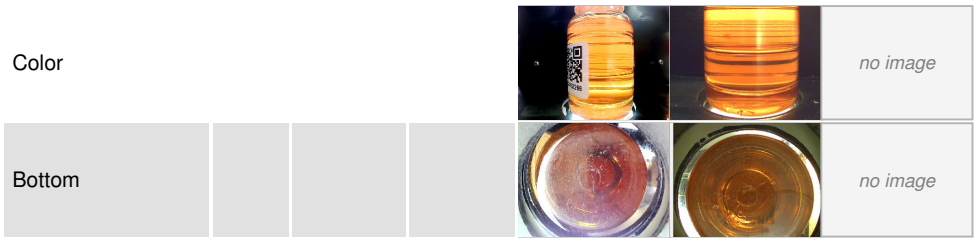

## GRAPHS

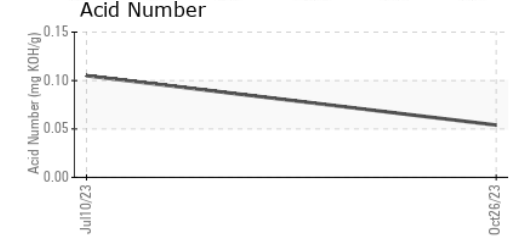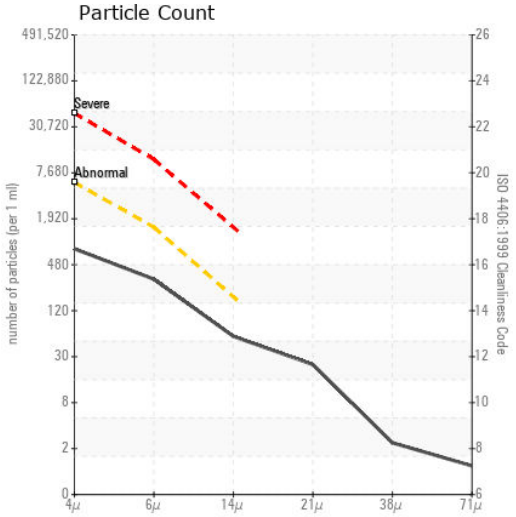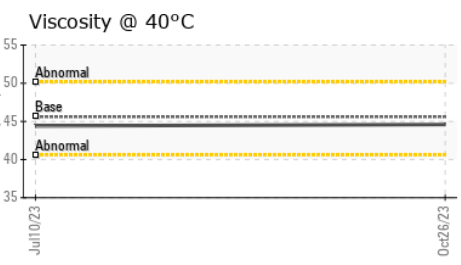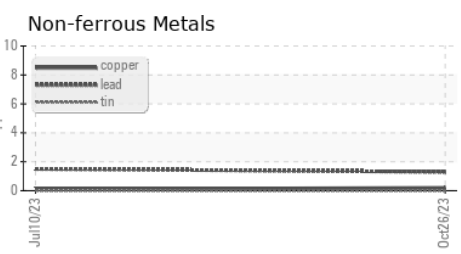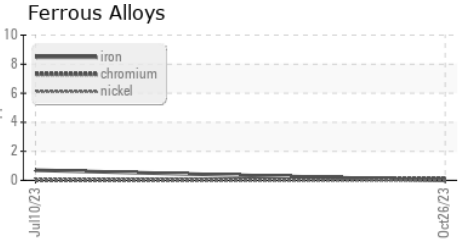

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0862266 **Received** : 02 Nov 2023  
**Lab Number** : 05996689 **Diagnosed** : 04 Nov 2023  
**Unique Number** : 10725049 **Diagnostician** : Don Baldrige  
**Test Package** : PLANT

**ARAUCO - GRAYLING**  
 5851 ARAUCO ROAD  
 GRAYLING, MI  
 US 49738  
 Contact: JOSEPH GREEN  
 joseph.green@arauco.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)