



# PROBLEM SUMMARY

Sample Rating Trend



ISO



Machine Id  
**AF12-130-2100-0000 KNIFE RING SHARPENING ROBOT 1**  
 Component  
**Hydraulic System**  
 Fluid  
**MOBIL DTE 10 EXCEL 46 (--- GAL)**

## COMPONENT CONDITION SUMMARY

### ▲ Particle Trend



## RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status			ATTENTION	---	---
Particles >14µm	ASTM D7647	>160	▲ 231	---	---
Particles >21µm	ASTM D7647	>40	▲ 104	---	---
Particles >38µm	ASTM D7647	>10	▲ 16	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 19/17/15	---	---

Customer Id: ARAGRAUS  
 Sample No.: WC0848190  
 Lab Number: 05996705  
 Test Package: PLANT



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS


*There are no recommended actions for this sample.*

## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend

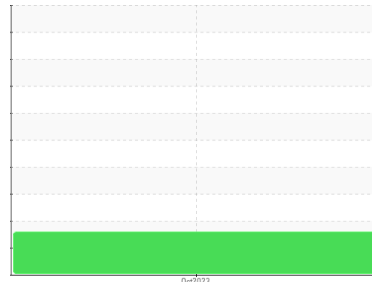

ISO



Machine Id  
**AF12-130-2100-0000 KNIFE RING SHARPENING ROBOT 1**

Component  
**Hydraulic System**

Fluid  
**MOBIL DTE 10 EXCEL 46 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a moderate amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0848190</b>	---	---
Sample Date	Client Info	<b>17 Oct 2023</b>	---	---
Machine Age	mths Client Info	<b>60</b>	---	---
Oil Age	mths Client Info	<b>6</b>	---	---
Oil Changed	Client Info	<b>Changed</b>	---	---
Sample Status		<b>ATTENTION</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184	<b>15</b>	---	---
Iron	ppm ASTM D5185m >20	<b>2</b>	---	---
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	---	---
Nickel	ppm ASTM D5185m >20	<b>0</b>	---	---
Titanium	ppm ASTM D5185m	<b>0</b>	---	---
Silver	ppm ASTM D5185m	<b>0</b>	---	---
Aluminum	ppm ASTM D5185m >20	<b>&lt;1</b>	---	---
Lead	ppm ASTM D5185m >20	<b>0</b>	---	---
Copper	ppm ASTM D5185m >20	<b>11</b>	---	---
Tin	ppm ASTM D5185m >20	<b>0</b>	---	---
Vanadium	ppm ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	<b>0</b>	---	---
Barium	ppm ASTM D5185m	<b>&lt;1</b>	---	---
Molybdenum	ppm ASTM D5185m	<b>0</b>	---	---
Manganese	ppm ASTM D5185m	<b>0</b>	---	---
Magnesium	ppm ASTM D5185m	<b>1</b>	---	---
Calcium	ppm ASTM D5185m	<b>79</b>	---	---
Phosphorus	ppm ASTM D5185m	<b>160</b>	---	---
Zinc	ppm ASTM D5185m	<b>109</b>	---	---
Sulfur	ppm ASTM D5185m	<b>1101</b>	---	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >15	<b>&lt;1</b>	---	---
Sodium	ppm ASTM D5185m	<b>0</b>	---	---
Potassium	ppm ASTM D5185m >20	<b>2</b>	---	---
Water	% ASTM D6304 >0.05	<b>0.005</b>	---	---
ppm Water	ppm ASTM D6304 >500	<b>53.9</b>	---	---

## FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	<b>3495</b>	---	---
Particles >6µm	ASTM D7647 >1300	<b>1042</b>	---	---
Particles >14µm	ASTM D7647 >160	▲ <b>231</b>	---	---
Particles >21µm	ASTM D7647 >40	▲ <b>104</b>	---	---
Particles >38µm	ASTM D7647 >10	▲ <b>16</b>	---	---
Particles >71µm	ASTM D7647 >3	<b>2</b>	---	---
Oil Cleanliness	ISO 4406 (c) >19/17/14	▲ <b>19/17/15</b>	---	---


## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045	<b>0.13</b>	---	---




# OIL ANALYSIS REPORT


## Particle Trend

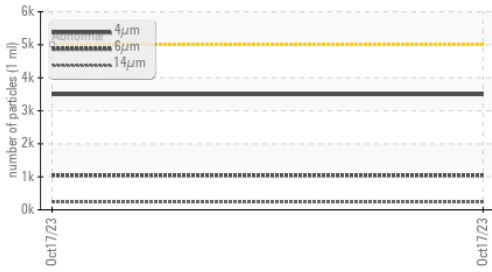

## Water (KF)

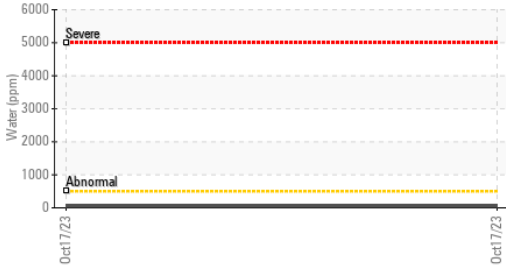


## PQ

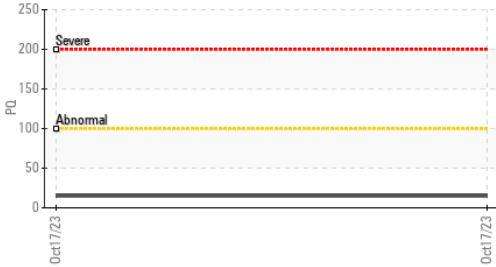

## Water (KF)



## Viscosity @ 40°C

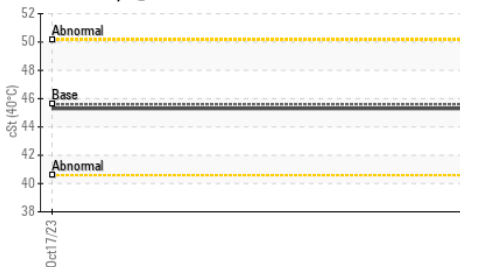

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45.6	45.3	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------


Color				no image	no image
Bottom				no image	no image

## GRAPHS


### Ferrous Alloys




### Non-ferrous Metals

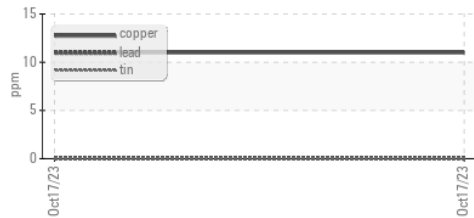


### Viscosity @ 40°C

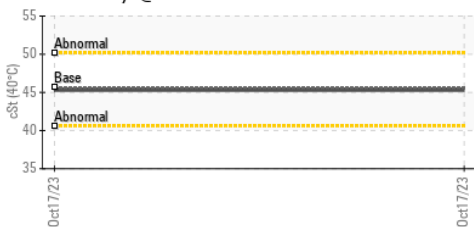

### Particle Count

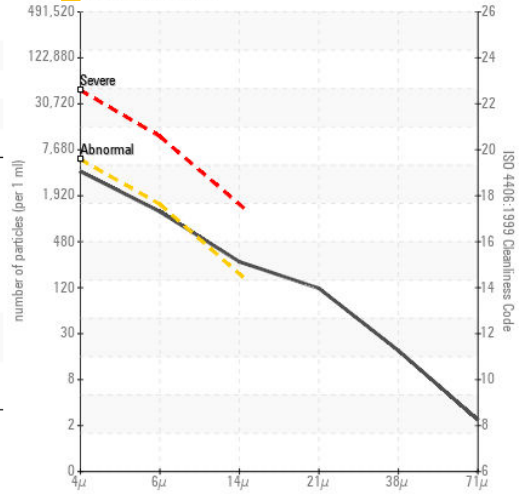

### Acid Number

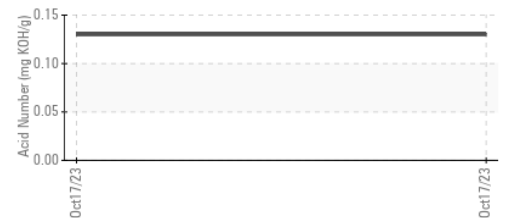

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : WC0848190 Received : 02 Nov 2023  
 Lab Number : 05996705 Diagnosed : 04 Nov 2023  
 Unique Number : 10725065 Diagnostician : Don Baldrige  
 Test Package : PLANT

**ARAUCO - GRAYLING**  
 5851 ARAUCO ROAD  
 GRAYLING, MI  
 US 49738  
 Contact: JOSEPH GREEN  
 joseph.green@arauco.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: