


PROBLEM SUMMARY

T-3 SOUTH VAC MILL (SOUTH PLANT)

Agitator Gearbox



JAX MAGNA-PLATE 220 FG (--- GAL)

COMPONENT CONDITION SUMMARY



RECOMMENDATION

Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS								
Sample Status			ABNORMAL					
Particles >4µm	ASTM D7647	>20000	<u> </u>					
Particles >6µm	ASTM D7647	>5000	A 7037					
Oil Cleanliness	ISO 4406 (c)	>21/19/16	<u> </u>					

Customer Id: TYSSAI Sample No.: USP0003057 Lab Number: 05996720 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 <u>dougb@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT



ISO

T-3 SOUTH VAC MILL (SOUTH PLANT)

Agitator Gearbox

JAX MAGNA-PLATE 220 FG (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0003057		
Sample Date		Client Info		01 Nov 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>150	11		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>10	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	<1		
Lead	ppm	ASTM D5185m	>100	<1		
Copper	ppm	ASTM D5185m	>50	<1		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		5		
Barium	ppm	ASTM D5185m		<1		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		1		
Calcium	ppm	ASTM D5185m		4		
Phosphorus	ppm	ASTM D5185m		435		
Zinc	ppm	ASTM D5185m		14		
Sulfur	ppm	ASTM D5185m		10472		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	2		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	3		
Water	%	ASTM D6304	>0.1	0.007		
ppm Water	ppm	ASTM D6304	>1000	73.0		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	42673		
Particles >6µm		ASTM D7647	>5000	<u> </u>		
Particles >14µm		ASTM D7647	>640	304		
Particles >21µm		ASTM D7647	>160	70		
Particles >38µm		ASTM D7647	>40	3		
Particles >71µm		ASTM D7647	>10	1		
Oil Cleanliness		ISO 4406 (c)	>21/19/16	A 23/20/15		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.63		




OIL ANALYSIS REPORT





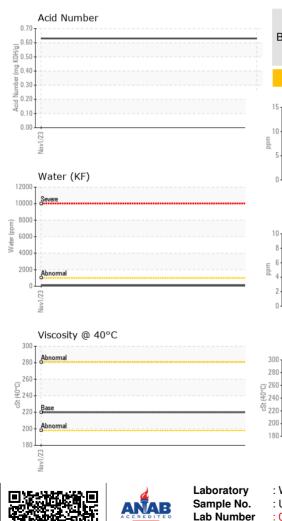

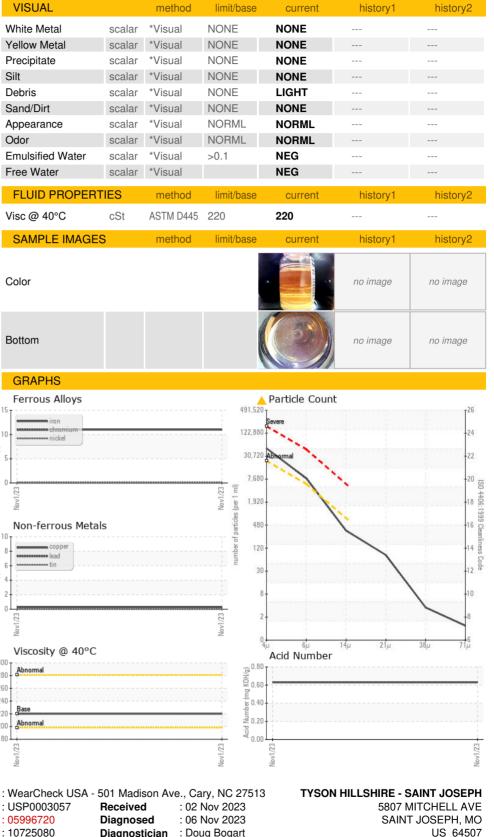

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

: 10725080

: IND 2

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Diagnostician

: Doug Bogart

Certificate L2367

Unique Number

Test Package

Page 4 of 4

Contact: