



# PROBLEM SUMMARY

Sample Rating Trend



ISO




Machine Id  
**T-2 BLENDER EAST (SOUTH PLANT)**

Component  
**Gearbox**

Fluid  
**JAX MAGNA-PLATE 220 FG (--- GAL)**

## COMPONENT CONDITION SUMMARY

### ▲ Particle Trend

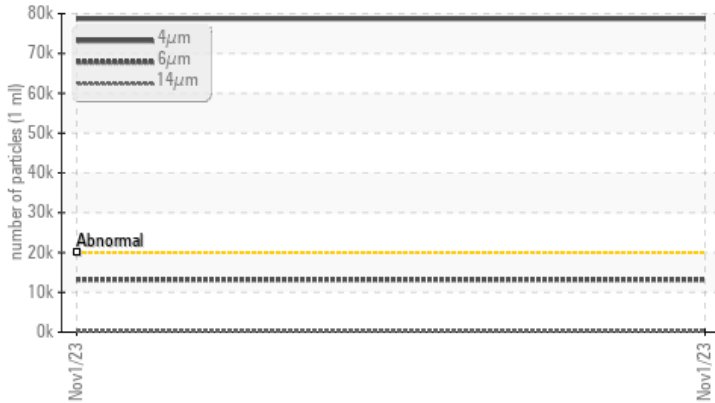

## RECOMMENDATION

Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status				<b>ABNORMAL</b>	---	---
Particles >4µm	ASTM D7647	>20000	▲ <b>78704</b>	---	---	---
Particles >6µm	ASTM D7647	>5000	▲ <b>13186</b>	---	---	---
Oil Cleanliness	ISO 4406 (c)	>21/19/16	▲ <b>23/21/15</b>	---	---	---

Customer Id: TYSSAI  
Sample No.: USP0003036  
Lab Number: 05996724  
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Doug Bogart +1 (800)237-1369 x4016  
[dougb@wearcheckusa.com](mailto:dougb@wearcheckusa.com)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

*There are no recommended actions for this sample.*

## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Machine Id  
**T-2 BLENDER EAST (SOUTH PLANT)**

Component  
**Gearbox**  
Fluid  
**JAX MAGNA-PLATE 220 FG (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>USP0003036</b>	---	---
Sample Date	Client Info		<b>01 Nov 2023</b>	---	---
Machine Age	hrs	Client Info	<b>0</b>	---	---
Oil Age	hrs	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>N/A</b>	---	---
Sample Status			<b>ABNORMAL</b>	---	---

WEAR METALS	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	<b>17</b>	---
Chromium	ppm	ASTM D5185m	>15	<b>&lt;1</b>	---
Nickel	ppm	ASTM D5185m	>15	<b>0</b>	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---
Silver	ppm	ASTM D5185m		<b>0</b>	---
Aluminum	ppm	ASTM D5185m	>25	<b>&lt;1</b>	---
Lead	ppm	ASTM D5185m	>100	<b>0</b>	---
Copper	ppm	ASTM D5185m	>200	<b>&lt;1</b>	---
Tin	ppm	ASTM D5185m	>25	<b>0</b>	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---

ADDITIVES	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	---
Barium	ppm	ASTM D5185m		<b>0</b>	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	---
Manganese	ppm	ASTM D5185m		<b>0</b>	---
Magnesium	ppm	ASTM D5185m		<b>&lt;1</b>	---
Calcium	ppm	ASTM D5185m		<b>3</b>	---
Phosphorus	ppm	ASTM D5185m		<b>563</b>	---
Zinc	ppm	ASTM D5185m		<b>0</b>	---
Sulfur	ppm	ASTM D5185m		<b>595</b>	---






CONTAMINANTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<b>2</b>	---
Sodium	ppm	ASTM D5185m		<b>10</b>	---
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	---
Water	%	ASTM D6304	>0.2	<b>0.006</b>	---
ppm Water	ppm	ASTM D6304	>2000	<b>61.5</b>	---

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	▲ <b>78704</b>	---	---
Particles >6µm	ASTM D7647	>5000	▲ <b>13186</b>	---	---
Particles >14µm	ASTM D7647	>640	<b>193</b>	---	---
Particles >21µm	ASTM D7647	>160	<b>35</b>	---	---
Particles >38µm	ASTM D7647	>40	<b>2</b>	---	---
Particles >71µm	ASTM D7647	>10	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>21/19/16	▲ <b>23/21/15</b>	---	---

FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.59</b>	---



# OIL ANALYSIS REPORT

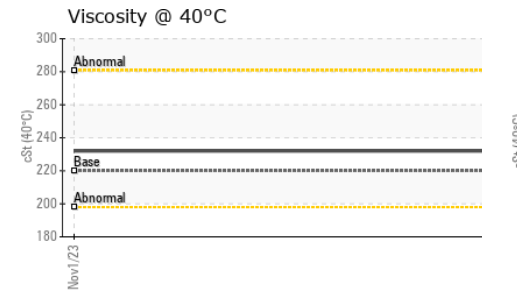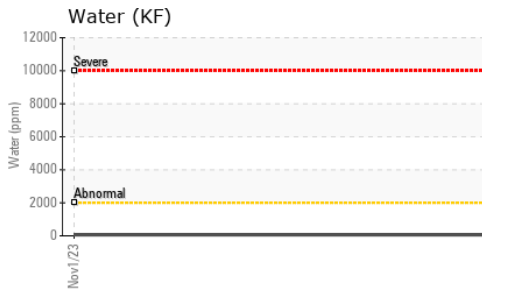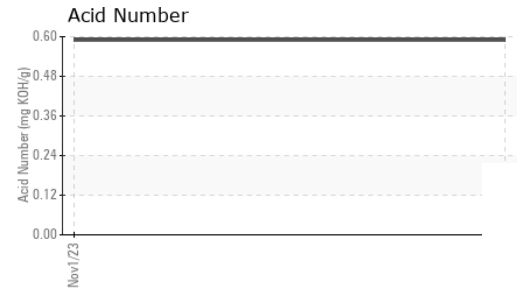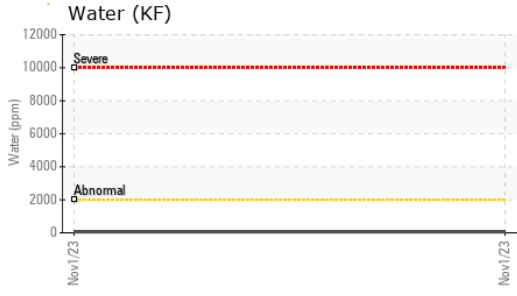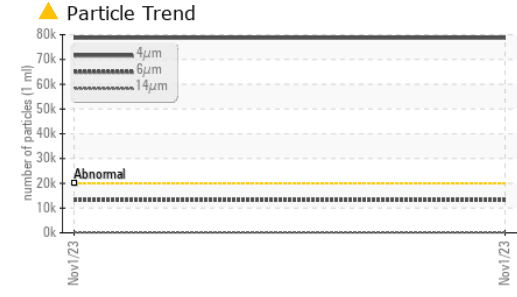




VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	220	232	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

### GRAPHS

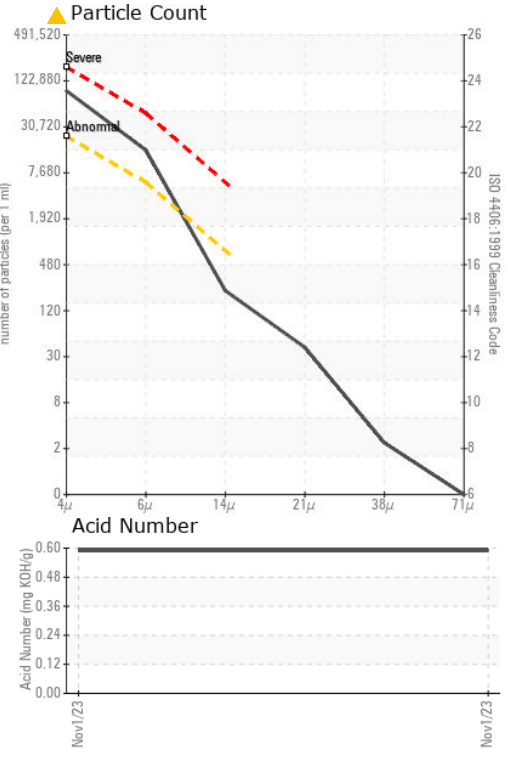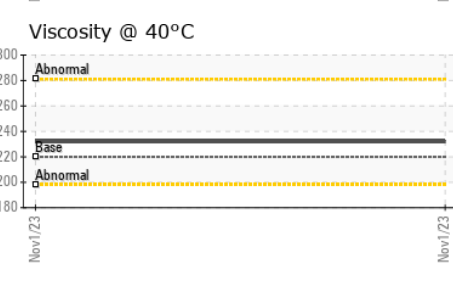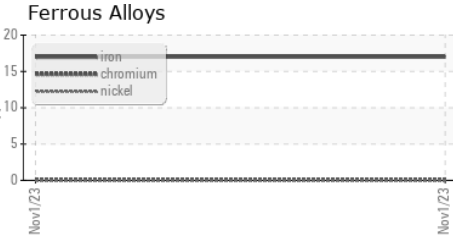

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : USP0003036 **Received** : 02 Nov 2023  
**Lab Number** : 05996724 **Diagnosed** : 06 Nov 2023  
**Unique Number** : 10725084 **Diagnostician** : Doug Bogart  
**Test Package** : IND 2

**TYSON HILLSHIRE - SAINT JOSEPH**  
 5807 MITCHELL AVE  
 SAINT JOSEPH, MO  
 US 64507  
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)