


# **OIL ANALYSIS REPORT**

# NOT GIVEN

Component

Compressor





#### DIAGNOSIS

## Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

**CURTIS 03F080003** 

## Contamination

There is no indication of any contamination in the oil


## **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

|                  |          |             |            | Oct2023     |          |          |
|------------------|----------|-------------|------------|-------------|----------|----------|
| OAMBLE INCOR     | 4471011  |             |            |             |          |          |
| SAMPLE INFORM    | MATION   | method      | limit/base | current     | history1 | history2 |
| Sample Number    |          | Client Info |            | UCH05996814 |          |          |
| Sample Date      |          | Client Info |            | 17 Oct 2023 |          |          |
| Machine Age      | hrs      | Client Info |            | 59601       |          |          |
| Oil Age          | hrs      | Client Info |            | 0           |          |          |
| Oil Changed      |          | Client Info |            | Changed     |          |          |
| Sample Status    |          |             |            | NORMAL      |          |          |
| WEAR METALS      |          | method      | limit/base | current     | history1 | history2 |
| Iron             | ppm      | ASTM D5185m | >50        | 0           |          |          |
| Chromium         | ppm      | ASTM D5185m | >10        | 0           |          |          |
| Nickel           | ppm      | ASTM D5185m |            | 0           |          |          |
| Titanium         | ppm      | ASTM D5185m |            | 0           |          |          |
| Silver           | ppm      | ASTM D5185m |            | 0           |          |          |
| Aluminum         | ppm      | ASTM D5185m | >25        | 0           |          |          |
| Lead             | ppm      | ASTM D5185m | >25        | 0           |          |          |
| Copper           | ppm      | ASTM D5185m | >50        | 0           |          |          |
| Tin              | ppm      | ASTM D5185m | >15        | 0           |          |          |
| Vanadium         | ppm      | ASTM D5185m |            | 0           |          |          |
| Cadmium          | ppm      | ASTM D5185m |            | 0           |          |          |
| ADDITIVES        |          | method      | limit/base | current     | history1 | history2 |
| Boron            | ppm      | ASTM D5185m | 1          | 0           |          |          |
| Barium           | ppm      | ASTM D5185m | 1          | 0           |          |          |
| Molybdenum       | ppm      | ASTM D5185m | 1          | 0           |          |          |
| Manganese        | ppm      | ASTM D5185m |            | 0           |          |          |
| Magnesium        | ppm      | ASTM D5185m | 1          | 0           |          |          |
| Calcium          | ppm      | ASTM D5185m | 1          | 0           |          |          |
| Phosphorus       | ppm      | ASTM D5185m | 800        | 461         |          |          |
| Zinc             | ppm      | ASTM D5185m | 20         | 8           |          |          |
| Sulfur           | ppm      | ASTM D5185m | 37         | 17          |          |          |
| CONTAMINANTS     |          | method      | limit/base |             | history1 | history2 |
|                  | •        |             |            | current     | history1 | HISTOLYZ |
| Silicon          | ppm      |             | >25        | <1          |          |          |
| Sodium           | ppm      | ASTM D5185m |            | 0           |          |          |
| Potassium        | ppm      | ASTM D5185m | >20        | 0           |          |          |
| FLUID DEGRADA    | ATION    | method      | limit/base | current     | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045  | 0.24       | 0.34        |          |          |
| VISUAL           |          | method      | limit/base | current     | history1 | history2 |
| White Metal      | scalar   | *Visual     | NONE       | NONE        |          |          |
| Yellow Metal     | scalar   | *Visual     | NONE       | NONE        |          |          |
| Precipitate      | scalar   | *Visual     | NONE       | NONE        |          |          |
| Silt             | scalar   | *Visual     | NONE       | NONE        |          |          |
| Debris           | scalar   | *Visual     | NONE       | NONE        |          |          |
| Sand/Dirt        | scalar   | *Visual     | NONE       | NONE        |          |          |
| Appearance       | scalar   | *Visual     | NORML      | NORML       |          |          |
| Odor             | scalar   | *Visual     | NORML      | NORML       |          |          |
| Emulsified Water | scalar   | *Visual     | >0.1       | NEG         |          |          |
| Free Water       | scalar   | *Visual     |            | NEG         |          |          |



# **OIL ANALYSIS REPORT**

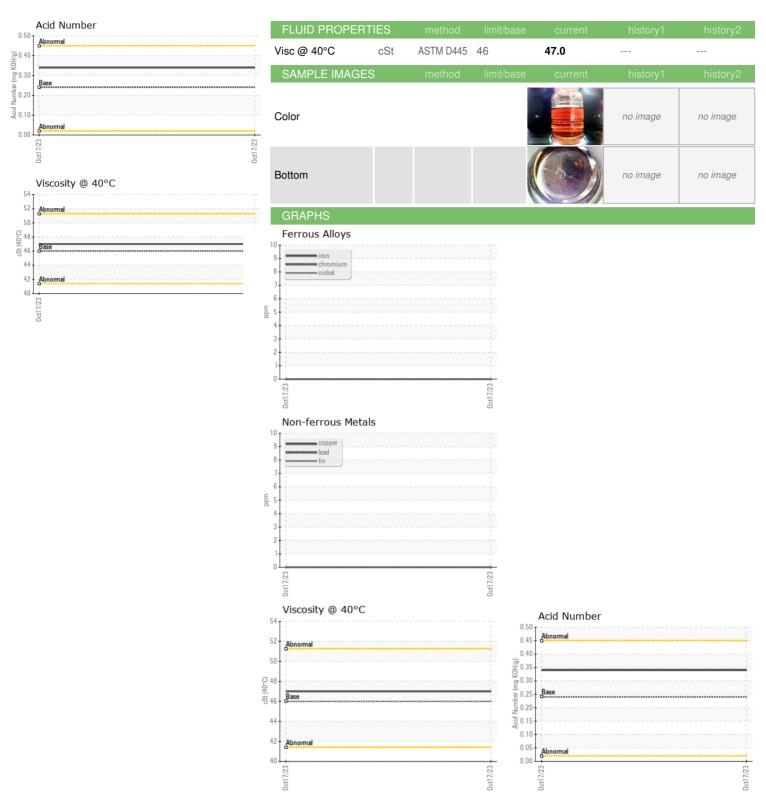





Laboratory

Sample No. Lab Number

: 05996814 Unique Number : 10725174 Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : UCH05996814 Received : 02 Nov 2023

Diagnosed : 04 Nov 2023

Diagnostician : Don Baldridge

ADVANCED COMPRESSED AIR SOLUTIONS (ACAS) 9421 FM 2920 RD BLDG 23

TOMBALL, TX US 77375

Contact: JIM SUAREZ

To discuss this sample report, contact Customer Service at 1-800-237-1369. jim@advancedcompressedair.com T:

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: