

## **OIL ANALYSIS REPORT**

Sample Rating Trend



<sup>Machine Id</sup> 22-PC-23 (S/N 60B) Component

**Hydraulic System** SKYDROL 500B-4 (--- LTR)

#### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Chlorine measured at 149 ppm.

### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	MAT <u>ION</u>	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0826398		
Sample Date		Client Info		01 Nov 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	nnm	ASTM D5185m	>20	0		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m	>20	0		
Silver	ppm	ASTM D5185m		-		
	ppm	ASTM D5185m	00	0		
Aluminum	ppm			-		
Lead	ppm	ASTM D5185m	>20	0		
Copper	ppm	ASTM D5185m		<1		
Tin	ppm	ASTM D5185m	>20	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		2		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		1		
Calcium	ppm	ASTM D5185m		4		
Phosphorus	ppm	ASTM D5185m		27764		
Zinc	ppm	ASTM D5185m		17		
Sulfur	ppm	ASTM D5185m		1645		
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0		
Sodium	ppm	ASTM D5185m	>50	1		
Potassium	ppm	ASTM D5185m	>20	16		
Chlorine Content	ppm	ASTM D5185m		149		
Water	%	ASTM D6304	>0.8	0.634		
ppm Water	ppm	ASTM D6304	>8000	6340		
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	1029		
Particles >6µm		ASTM D7647	>1300	133		
Particles >14µm		ASTM D7647	>160	8		
Particles >21µm		ASTM D7647	>40	3		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	17/14/10		
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.10	0.938		
2:25:22) Dov: 1	3		Canta at/l			MOORANICA


Report Id: WOOSANCA [WUSCAR] 05997070 (Generated: 11/13/2023 13:35:33) Rev: 1


Contact/Location: REYNARD GOLDMAN - WOOSANCA




# **OIL ANALYSIS REPORT**

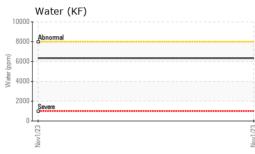

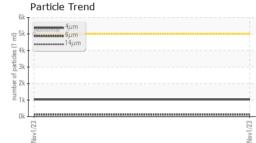

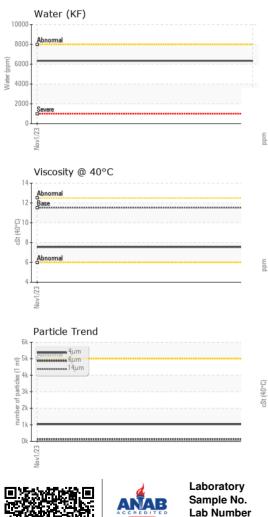

Certificate L2367

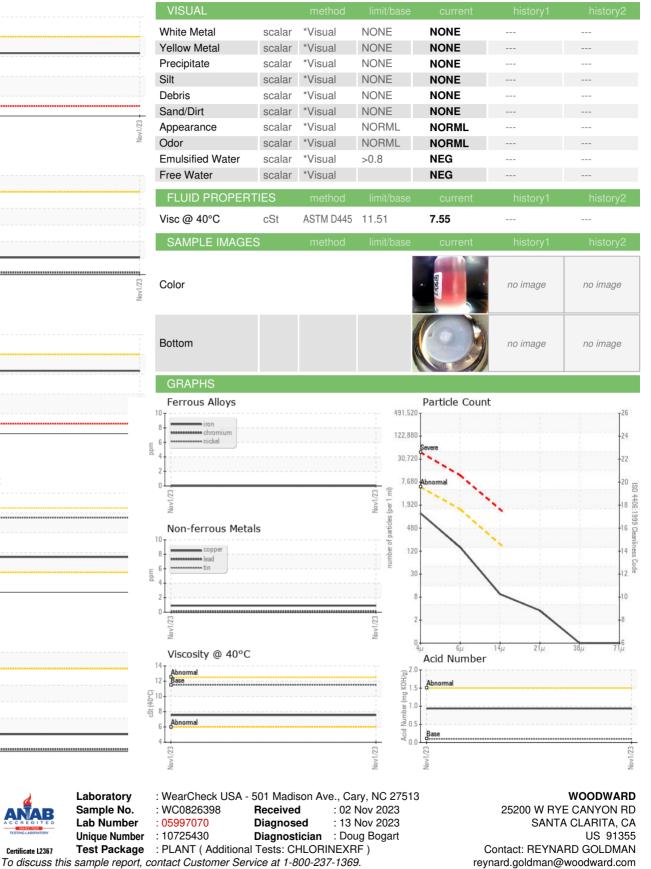

Report Id: WOOSANCA [WUSCAR] 05997070 (Generated: 11/13/2023 13:35:33) Rev: 1

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F:

T: (661)702-5991