




OIL ANALYSIS REPORT

Sample Rating Trend

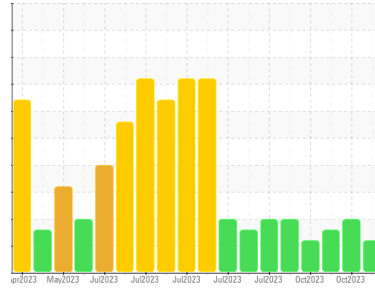

ISO



Area
RIG 879
 Machine Id
R879-MP-02
 Component
Gearbox
 Fluid
GEAR OIL ISO 320 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	KL0012925	KL0012963	KL0012964
Sample Date	Client Info	24 Oct 2023	18 Oct 2023	11 Oct 2023
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >200	31	31	40
Chromium	ppm	ASTM D5185m >10	<1	<1	<1
Nickel	ppm	ASTM D5185m >10	0	0	0
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >25	<1	2	3
Lead	ppm	ASTM D5185m >50	0	0	0
Copper	ppm	ASTM D5185m >200	3	4	4
Tin	ppm	ASTM D5185m >10	0	0	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 50	4	3	3
Barium	ppm	ASTM D5185m 15	4	3	4
Molybdenum	ppm	ASTM D5185m 15	5	4	5
Manganese	ppm	ASTM D5185m	0	<1	<1
Magnesium	ppm	ASTM D5185m 50	8	5	5
Calcium	ppm	ASTM D5185m 50	23	22	25
Phosphorus	ppm	ASTM D5185m 350	134	160	161
Zinc	ppm	ASTM D5185m 100	103	99	89
Sulfur	ppm	ASTM D5185m 12500	10232	9185	9197

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >50	15	14	16
Sodium	ppm	ASTM D5185m	44	49	52
Potassium	ppm	ASTM D5185m >20	3	1	1

FLUID CLEANLINESS





method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >20000	▲ 117393	▲ 183930	▲ 160156
Particles >6µm	ASTM D7647 >5000	▲ 27813	▲ 62077	▲ 37544
Particles >14µm	ASTM D7647 >640	140	▲ 1543	▲ 653
Particles >21µm	ASTM D7647 >160	19	▲ 235	159
Particles >38µm	ASTM D7647 >40	0	10	4
Particles >71µm	ASTM D7647 >10	0	2	0
Oil Cleanliness	ISO 4406 (c) >21/19/16	▲ 24/22/14	▲ 25/23/18	▲ 25/22/17

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045 0.85	0.48	0.42	0.42




OIL ANALYSIS REPORT

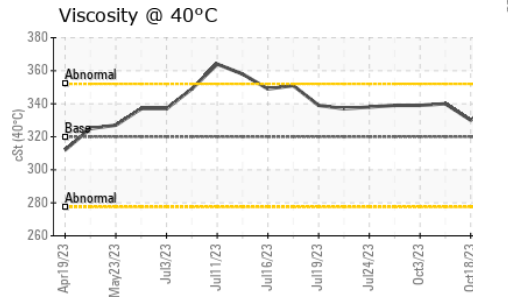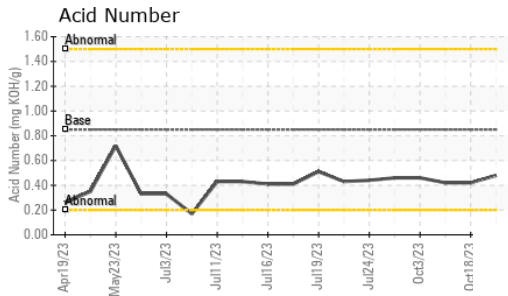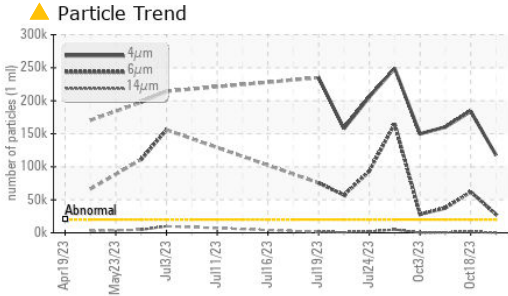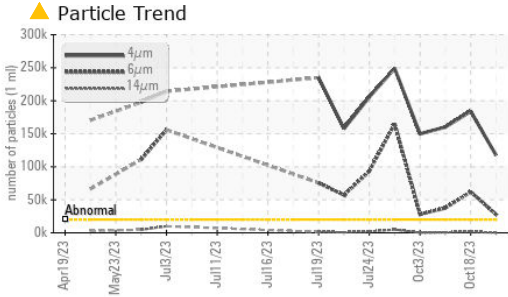





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	MODER	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	320	330	340

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

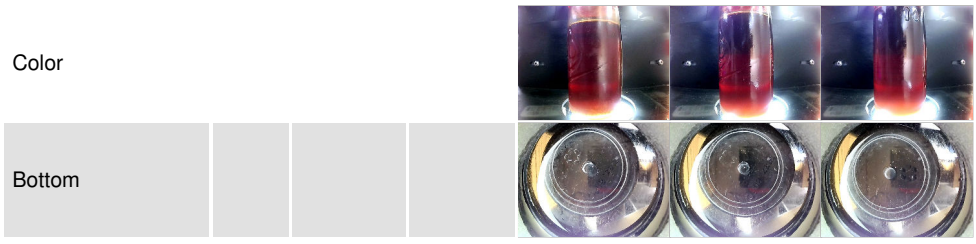

GRAPHS

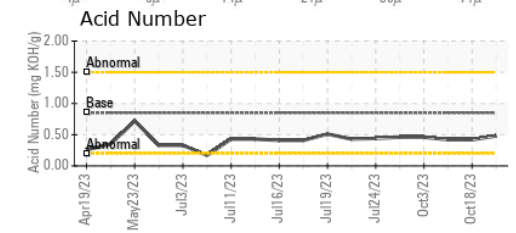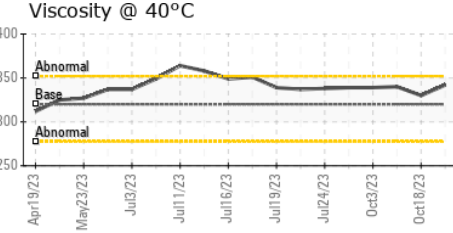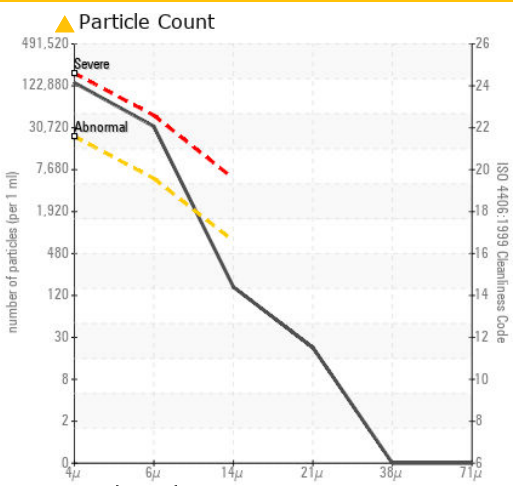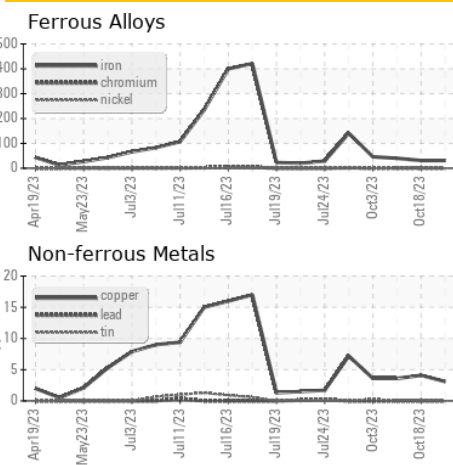

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0012925 **Received** : 02 Nov 2023
Lab Number : 05997343 **Diagnosed** : 05 Nov 2023
Unique Number : 10725703 **Diagnostician** : Don Baldrige
Test Package : MOB 2 (Additional Tests: PrtCount)

PATTERSON - UTI DRILLING
 9915 WEST INDUSTRIAL
 MIDLAND, TX
 US 79706
 Contact: RICKY MATA
 ricky.mata@patenergy.com
 T: (832)219-4559
 F: (432)561-9388

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)