


OIL ANALYSIS REPORT

SAMPLE INFORMATION

Sample Rating Trend

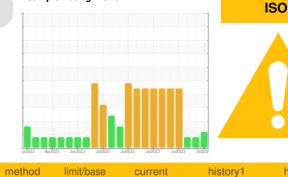

history2

Area **RIG 879** Machine Id **R879-P-03** Component

Gearbox

BRENNTAG COASTAL CHEMICAL HBC GEAR OIL 320 (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. We recommend an early resample to monitor this condition. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The system cleanliness is above the acceptable limit for the target ISO 4406 cleanliness code.


Fluid Condition


The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.


0.000 22 00 000		moniou		ourrent	Thotory	Thotory
Sample Number		Client Info		KL0012924	KL0012732	KL0012743
Sample Date		Client Info		24 Oct 2023	03 Oct 2023	13 Sep 2023
Machine Age	days	Client Info		0	0	0
Oil Age	days	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	18	2	95
Chromium	ppm	ASTM D5185m	>10	<1	0	2
Nickel	ppm	ASTM D5185m	>10	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	<1	<1	3
Lead	ppm	ASTM D5185m	>50	0	0	<1
Copper	ppm	ASTM D5185m	>200	3	1	4
Tin	ppm	ASTM D5185m	>10	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		2	<1	0
Barium	ppm	ASTM D5185m		1	0	4
Molybdenum	ppm	ASTM D5185m		1	0	2
Manganese	ppm	ASTM D5185m		0	<1	1
Magnesium	ppm	ASTM D5185m		8	5	8
Calcium	ppm	ASTM D5185m		19	8	48
Phosphorus	ppm	ASTM D5185m		93	81	115
Zinc	ppm	ASTM D5185m		43	29	40
Sulfur	ppm	ASTM D5185m		9759	8494	10468
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	11	7	13
Sodium	ppm	ASTM D5185m		44	5	116
Potassium	ppm	ASTM D5185m	>20	2	<1	<1
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	🔺 119397	45935	
Particles >6µm		ASTM D7647	>5000	<u> </u>	3315	
Particles >14µm		ASTM D7647	>640	142	69	
Particles >21µm		ASTM D7647	>160	19	17	
Particles >38µm		ASTM D7647	>40	0	1	
Particles >71µm		ASTM D7647	>10	0	1	
Oil Cleanliness		ISO 4406 (c)	>21/19/16	<u> </u>	a 23/19/13	
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.35	0.25	0.24




OIL ANALYSIS REPORT

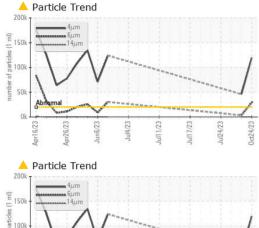



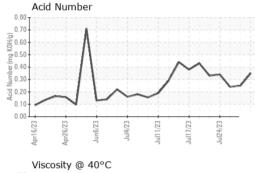




VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	MODER
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	🔺 HAZY
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	0.2%
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	310	338	332	333
SAMPLE IMAGES		method	limit/base	current	history1	history2
						STOX -

Color



Bottom

GRAPHS

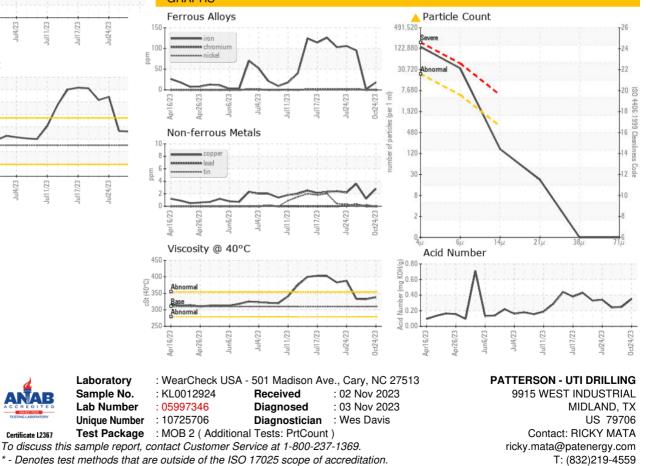

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Contact/Location: RICKY MATA - PATMIDTX

F: (432)561-9388