

OIL ANALYSIS REPORT

Sample Rating Trend



KAESER 7468114

Component Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		De	:2021	Nov2022 Oct202	3	
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA000513	KCP47166D	KCP39027
Sample Date		Client Info		13 Oct 2023	02 Nov 2022	01 Dec 2021
Machine Age	hrs	Client Info		5519	3720	1880
Oil Age	hrs	Client Info		0	1840	1880
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	2
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m		<1	<1	2
Lead		ASTM D5185m	>10	0	0	<1
	ppm	ASTM D5185m		3	2	4
Copper	ppm				2	
Tin	ppm	ASTM D5185m	>10	0		0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	<1
Barium	ppm	ASTM D5185m	90	36	21	29
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m	100	81	86	70
Calcium	ppm	ASTM D5185m	0	2	0	3
Phosphorus	ppm	ASTM D5185m	0	0	22	18
Zinc	ppm	ASTM D5185m	0	0	0	1
Sulfur	ppm	ASTM D5185m	23500	21810	22676	16056
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	<1	1
Sodium	ppm	ASTM D5185m		4	22	15
Potassium	ppm	ASTM D5185m	>20	5	4	12
Water	%	ASTM D6304	>0.05	0.020	0.018	0.013
ppm Water	ppm	ASTM D6304	>500	203.7	183.4	137.6
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		2942	11626	49230
Particles >6µm		ASTM D7647	>1300	877	<u> </u>	▲ 20026
Particles >14µm		ASTM D7647	>80	51	▲ 329	▲ 901
Particles >21µm		ASTM D7647		11	▲ 82	▲ 119
Particles >38µm		ASTM D7647	>4	0	<u> </u>	2
Particles >71µm		ASTM D7647		0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	0 19/17/13	21/19/16	22/17
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.36	0.41	0.356
·17·18) Rev: 1				Contact/Locati	on: Service Mai	nager - RIGBU


Report Id: RIGBUR [WUSCAR] 05997382 (Generated: 11/05/2023 10:17:18) Rev: 1


Contact/Location: Service Manager - RIGBUR



OIL ANALYSIS REPORT






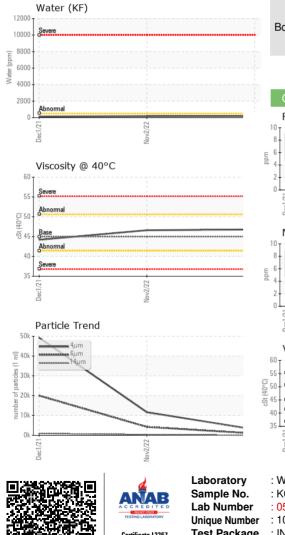

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	46.8	46.6	44.2
SAMPLE IMAGES	;	method	limit/base	current	history1	history2
Color						

Bottom

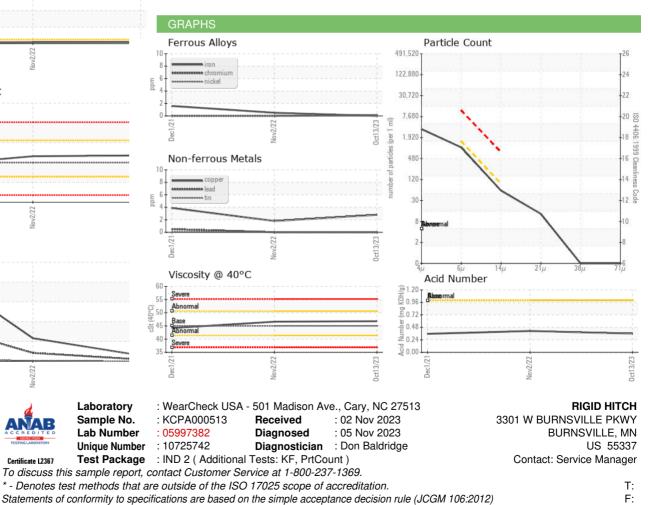

Contact/Location: Service Manager - RIGBUR