


# **PROBLEM SUMMARY**

# Machine Id 6840714 (S/N 1278) Component

Compressor Fluid KAESER SIGMA (OEM) S-460 (--- QTS)

# COMPONENT CONDITION SUMMARY

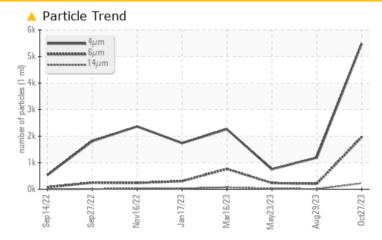

# RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

# 

Sample Rating Trend

PROBLEMATIC TEST RESULTS						
Sample Status		ABNORMAL	NORMAL	NORMAL		
Particles >6µm	ASTM D7647 >13	300 <b>🔺 1966</b>	206	233		
Particles >14µm	ASTM D7647 >80	) 🔺 224	9	25		
Particles >21µm	ASTM D7647 >20	) 🔺 66	2	7		
Oil Cleanliness	ISO 4406 (c) >/	/17/13 🔺 <b>20/18/15</b>	17/15/10	17/15/12		

Customer Id: STACHE Sample No.: KCPA007448 Lab Number: 05997391 Test Package: IND 2



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Don Baldridge +1 <u>don.b505@comcast.net</u>

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

### **RECOMMENDED ACTIONS**

There are no recommended actions for this sample.

### HISTORICAL DIAGNOSIS

### 29 Aug 2023 Diag: Don Baldridge



Resample at the next service interval to monitor.All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

# 23 May 2023 Diag: Don Baldridge

16 Mar 2023 Diag: Don Baldridge



Resample at the next service interval to monitor.All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view repor





Resample at the next service interval to monitor.All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





# **OIL ANALYSIS REPORT**

# Sample Rating Trend ISO

Machine Id 6840714 (S/N 1278) Component Compressor

Fluid KAESER SIGMA (OEM) S-460 (--- QTS)

# DIAGNOSIS

# Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

# Wear

All component wear rates are normal.

# Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


Sample Number Sample Date Machine Age		method	limit/base	current	history1	history2
Sample Date		Client Info		KCPA007448	KCPA002246	KCPA001355
Machine Age		Client Info		27 Oct 2023	29 Aug 2023	23 May 2023
	hrs	Client Info		6671	6209	5415
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	<1
Chromium	ppm	ASTM D5185m	>10	<1	0	<1
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>10	6	7	6
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper	ppm	ASTM D5185m	>50	<1	<1	<1
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	<1
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	90	3	<1	11
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus	ppm	ASTM D5185m		154	210	210
Zinc	ppm	ASTM D5185m		4	0	7
o //	ppm	ASTM D5185m		1744	2186	3019
Sulfur						5015
CONTAMINANTS		method	limit/base	current	history1	history2
Sulfur CONTAMINANTS Silicon	ppm	method ASTM D5185m	limit/base	current <1	<1	history2 <1
CONTAMINANTS				<1 0		history2 <1 2
CONTAMINANTS Silicon	ppm	ASTM D5185m		<1	<1	history2 <1
CONTAMINANTS Silicon Sodium	ppm ppm	ASTM D5185m ASTM D5185m	>25 >20	<1 0 3 0.006	<1 3	history2 <1 2
CONTAMINANTS Silicon Sodium Potassium Water	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	>25 >20 >0.05	<1 0 3	<1 3 1	history2 <1 2 <1
CONTAMINANTS Silicon Sodium Potassium Water	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304	>25 >20 >0.05	<1 0 3 0.006 67.6 current	<1 3 1 0.003	history2 <1 2 <1 0.007
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 <b>method</b> ASTM D7647	>25 >20 >0.05 >500 limit/base	<1 0 3 0.006 67.6 current 5481	<1 3 1 0.003 30.6 history1 1192	history2 <1 2 <1 0.007 70.5 history2 752
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base	<1 0 3 0.006 67.6 <u>current</u> 5481 ▲ 1966	<1 3 1 0.003 30.6 history1 1192 206	history2 <1 2 <1 0.007 70.5 history2 752 233
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80	<1 0 3 0.006 67.6 <u>current</u> 5481 ▲ 1966 ▲ 224	<1 3 1 0.003 30.6 history1 1192 206 9	history2 <1 2 <1 0.007 70.5 history2 752 233 25
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20	<1 0 3 0.006 67.6 <u>current</u> 5481 ▲ 1966 ▲ 224 ▲ 66	<1 3 1 0.003 30.6 history1 1192 206 9 2	history2 <1 2 <1 0.007 70.5 history2 752 233 25 7
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20 >4	<1 0 3 0.006 67.6 <u>current</u> 5481 ▲ 1966 ▲ 224 ▲ 66 3	<1 3 1 0.003 30.6 history1 1192 206 9 2 2 0	history2 <1 2 <1 0.007 70.5 history2 752 233 25 7 7 1
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >21µm Particles >38µm Particles >71µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20 >4 >3	<1 0 3 0.006 67.6 <u>current</u> 5481 ▲ 1966 ▲ 224 ▲ 66 3 1	<1 3 1 0.003 30.6 history1 1192 206 9 2 0 0 0	<1
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20 >4	<1 0 3 0.006 67.6 <u>current</u> 5481 ▲ 1966 ▲ 224 ▲ 66 3	<1 3 1 0.003 30.6 history1 1192 206 9 2 2 0	history2   <1
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	ppm ppm % ppm IESS	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20 >4 >3	<1 0 3 0.006 67.6 <u>current</u> 5481 ▲ 1966 ▲ 224 ▲ 66 3 1	<1 3 1 0.003 30.6 history1 1192 206 9 2 0 0 0	history2   <1


Contact/Location: Service Manager - STACHE



# **OIL ANALYSIS REPORT**

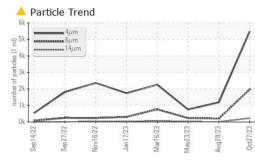


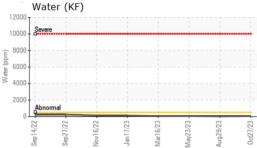

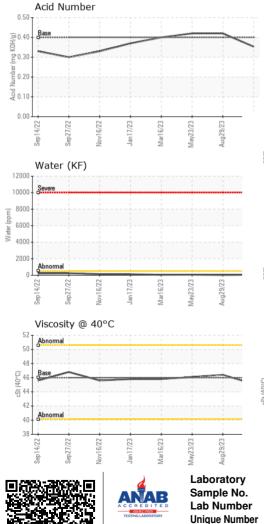

VIOLAL		and a file of the	Parel Marca a		In the term of the	la la tara 20
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	45.1	46.4	46.1
SAMPLE IMAGES	S	method	limit/base	current	history1	history2
Color				· [].	*	

Bottom

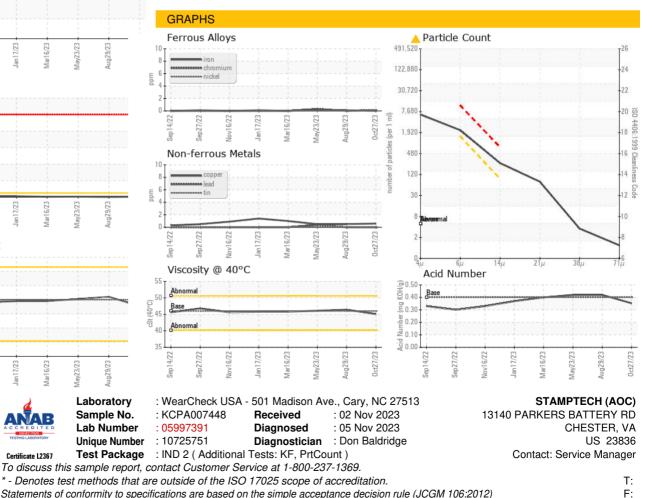

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: Service Manager - STACHE