




# OIL ANALYSIS REPORT

Sample Rating Trend

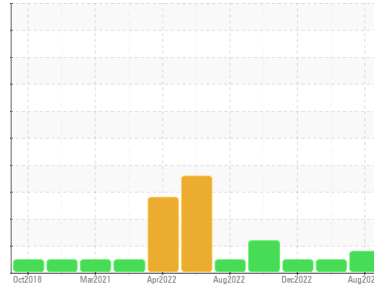

FUEL



Machine Id  
**TEREX MIXER FD6000 1532 (S/N 011355)**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (8 GAL)**

## DIAGNOSIS

### Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time.

### Wear

All component wear rates are normal.

### Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>RW0004372</b>	RW0004036	RW0004031
Sample Date	Client Info		<b>10 Aug 2023</b>	25 Apr 2023	05 Dec 2022
Machine Age	hrs	Client Info	<b>3148</b>	2328	438
Oil Age	hrs	Client Info	<b>399</b>	428	438
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>MARGINAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>45</b>	56	72
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>1</b>	<1	<1
Lead	ppm	ASTM D5185m >40	<b>1</b>	2	11
Copper	ppm	ASTM D5185m >330	<b>8</b>	37	108
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	3	9
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>31</b>	45	17
Barium	ppm	ASTM D5185m 0	<b>4</b>	2	0
Molybdenum	ppm	ASTM D5185m 0	<b>43</b>	44	50
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185m 0	<b>463</b>	504	751
Calcium	ppm	ASTM D5185m	<b>1549</b>	1638	1380
Phosphorus	ppm	ASTM D5185m	<b>699</b>	737	852
Zinc	ppm	ASTM D5185m	<b>847</b>	919	1053
Sulfur	ppm	ASTM D5185m	<b>2540</b>	2616	2639

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>7</b>	8	10
Sodium	ppm	ASTM D5185m	<b>0</b>	0	2
Potassium	ppm	ASTM D5185m >20	<b>1</b>	1	0
Fuel	%	ASTM D3524 >5	<b>▲ 3.9</b>	<1.0	<1.0

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.7</b>	0.8	0.9
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.1</b>	8.9	9.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.3</b>	24.0	21.5

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>22.1</b>	21.4	17.0
Base Number (BN)	mg KOH/g	ASTM D2896 9.4	<b>9.57</b>	9.86	8.62











# OIL ANALYSIS REPORT

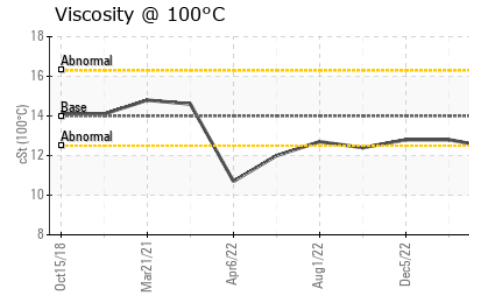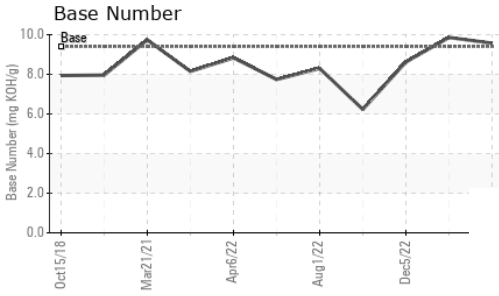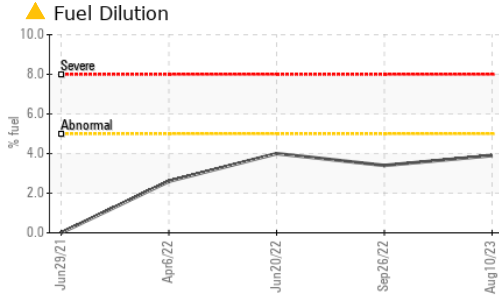

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14	12.4	12.8

## GRAPHS

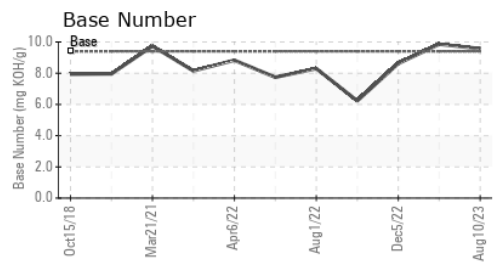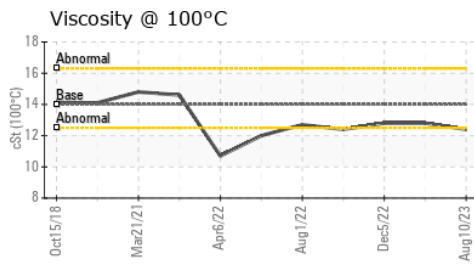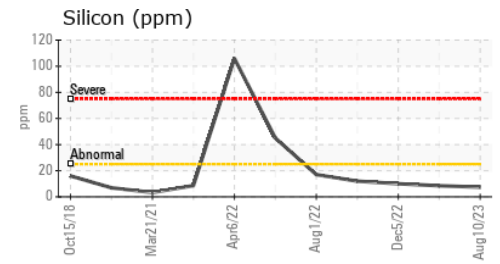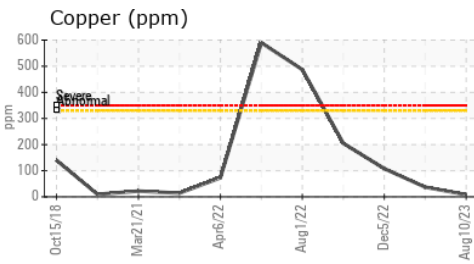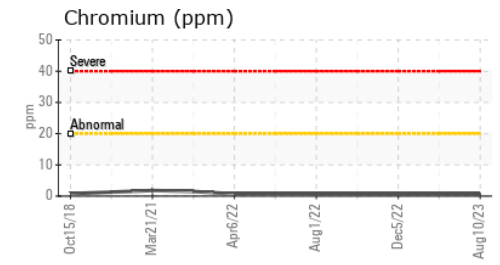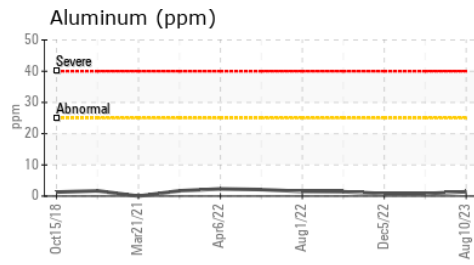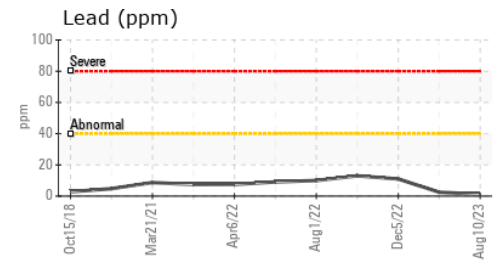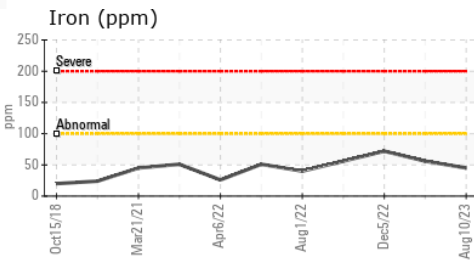

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RW0004372 **Received** : 02 Nov 2023  
**Lab Number** : 05997479 **Diagnosed** : 06 Nov 2023  
**Unique Number** : 10725839 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2 ( Additional Tests: FuelDilution, PercentFuel )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**HOMER CONCRETE**  
 205 S CEDAR ST  
 IMLAY CITY, MI  
 US 48444  
 Contact: DENNIS ONDRAJKA  
 homerconcrete@aol.com  
 T: (810)724-3905  
 F: (810)724-0733