




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

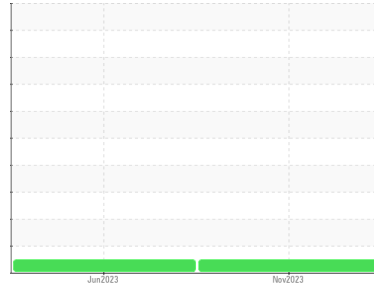

Machine Id  
**D-236**

Component  
**Hydrostatic**

Fluid  
**JOHN DEERE HYDRAU (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0828484</b>	WC0780375	---
Sample Date	Client Info			<b>02 Nov 2023</b>	01 Jun 2023	---
Machine Age	hrs	Client Info		<b>2002</b>	1441	---
Oil Age	hrs	Client Info		<b>2002</b>	355	---
Oil Changed	Client Info			<b>Changed</b>	Not Changd	---
Sample Status				<b>NORMAL</b>	NORMAL	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	<b>4</b>	3	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m		<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>50	<b>&lt;1</b>	1	---
Lead	ppm	ASTM D5185m	>50	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m	>200	<b>6</b>	4	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	---
Barium	ppm	ASTM D5185m		<b>0</b>	2	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	1	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>4</b>	8	---
Calcium	ppm	ASTM D5185m	87	<b>94</b>	111	---
Phosphorus	ppm	ASTM D5185m	727	<b>613</b>	659	---
Zinc	ppm	ASTM D5185m	900	<b>797</b>	839	---
Sulfur	ppm	ASTM D5185m	1500	<b>1549</b>	1853	---





CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<b>2</b>	1	---
Sodium	ppm	ASTM D5185m		<b>0</b>	<1	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	<b>1121</b>	1340	---
Particles >6µm		ASTM D7647	>2500	<b>206</b>	173	---
Particles >14µm		ASTM D7647	>320	<b>14</b>	10	---
Particles >21µm		ASTM D7647	>80	<b>4</b>	2	---
Particles >38µm		ASTM D7647	>20	<b>1</b>	0	---
Particles >71µm		ASTM D7647	>4	<b>0</b>	0	---
Oil Cleanliness		ISO 4406 (c)	>20/18/15	<b>17/15/11</b>	18/15/10	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	<b>0.75</b>	0.66	---




# OIL ANALYSIS REPORT

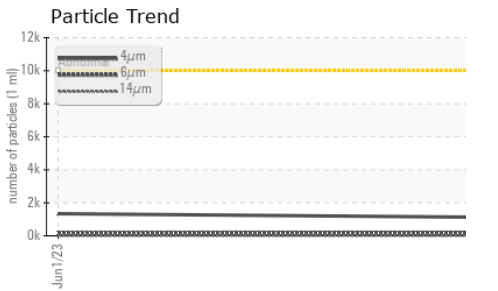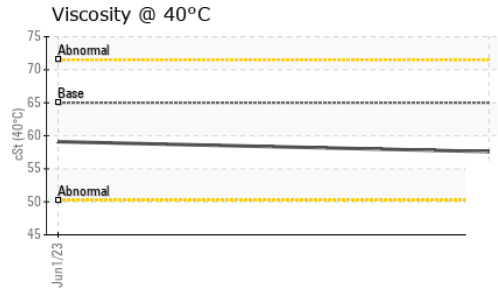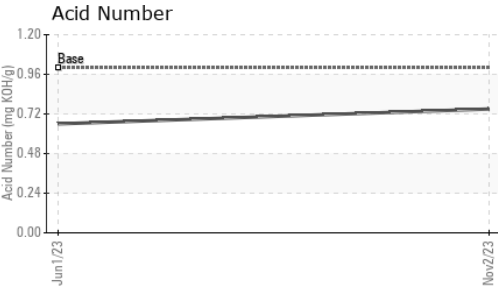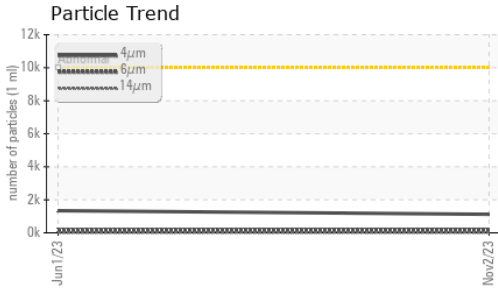






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 65	57.6	59.1	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

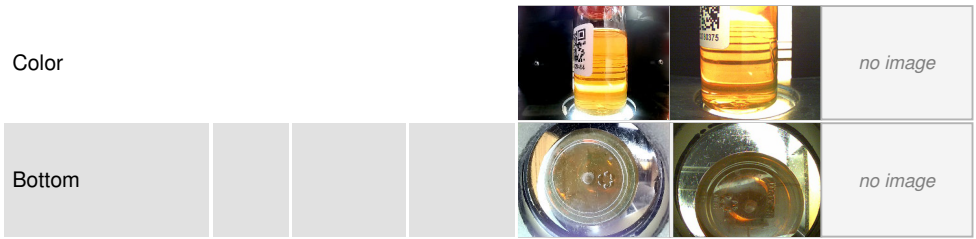

## GRAPHS

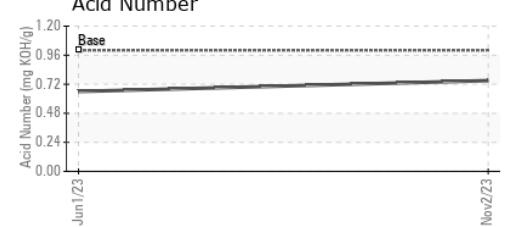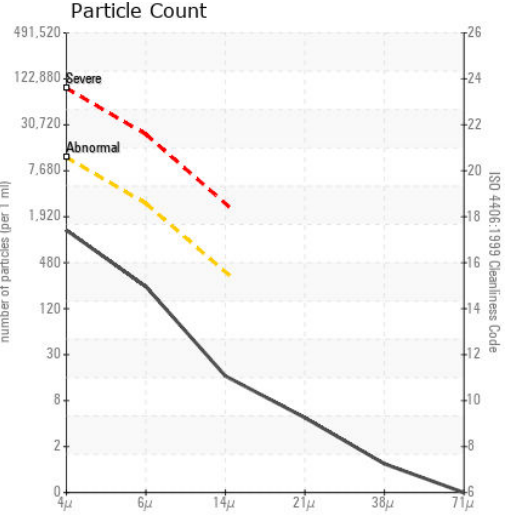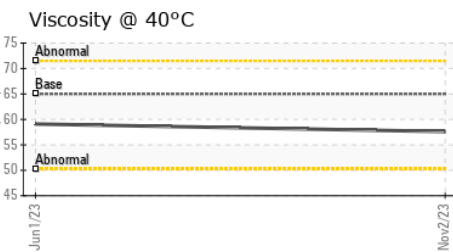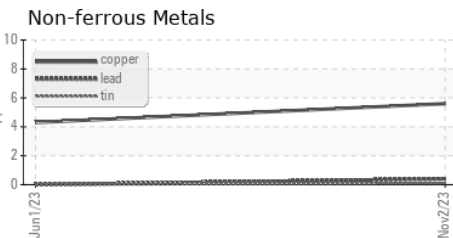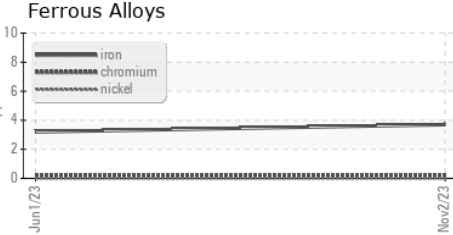

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : WC0828484 Received : 03 Nov 2023  
 Lab Number : 05997898 Diagnosed : 06 Nov 2023  
 Unique Number : 10726258 Diagnostician : Don Baldrige  
 Test Package : CONST ( Additional Tests: PrtCount )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**DUKE LAZZARA**  
 4201 FAYETTEVILLE RD  
 RALEIGH, NC  
 US 27603  
 Contact: NICK DIXON  
 NICK.DIXON@DUKELAZZAM.COM  
 T: (919)760-7797  
 F: