




# PROBLEM SUMMARY


Area  
**[212308]**  
 Machine Id  
**372AO 08411 - ANRO**  
 Component  
**Hydraulic System**  
 Fluid  
**AW HYDRAULIC OIL ISO 46 (--- GAL)**

Sample Rating Trend

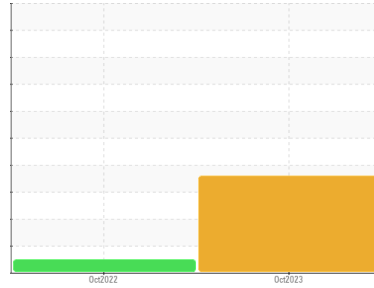


## COMPONENT CONDITION SUMMARY

▲ Silicon (ppm)

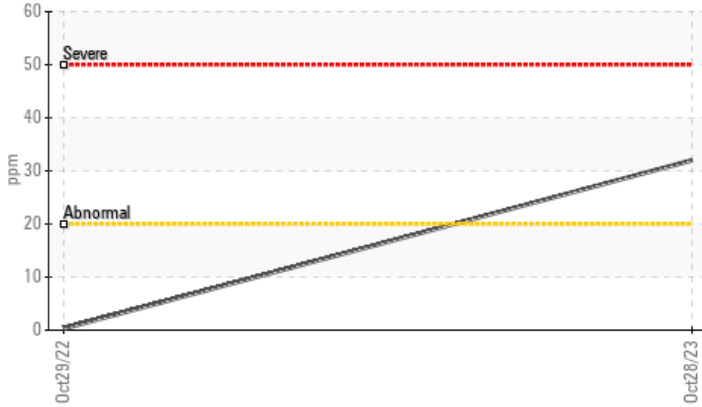

▲ Particle Trend

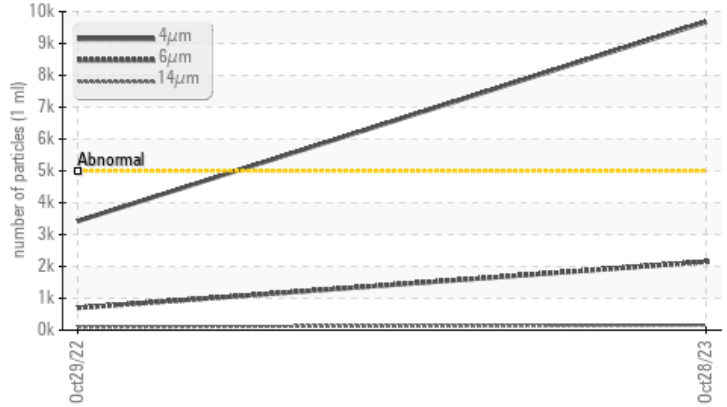

## RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	NORMAL	---
Silicon	ppm	ASTM D5185m >20	▲ 32	<1	---
Particles >4µm		ASTM D7647 >5000	▲ 9676	3422	---
Particles >6µm		ASTM D7647 >1300	▲ 2147	698	---
Particles >14µm		ASTM D7647 >160	▲ 161	97	---
Particles >21µm		ASTM D7647 >40	▲ 50	18	---
Oil Cleanliness		ISO 4406 (c) >19/17/14	▲ 20/18/15	19/17/14	---

Customer Id: ADVFRA  
 Sample No.: WC0836609  
 Lab Number: 05997937  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

*There are no recommended actions for this sample.*

## HISTORICAL DIAGNOSIS

**29 Oct 2022 Diag: Angela Borella**

NORMAL



No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





# OIL ANALYSIS REPORT

Sample Rating Trend

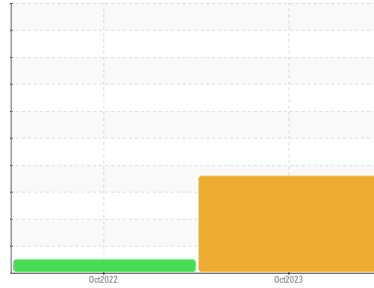

DIRT



Area  
**[212308]**  
 Machine Id  
**372AO 08411 - ANRO**  
 Component  
**Hydraulic System**  
 Fluid  
**AW HYDRAULIC OIL ISO 46 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of particulates present in the oil. Elemental level of silicon (Si) above normal.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0836609</b>	WC0749821	---
Sample Date	Client Info	<b>28 Oct 2023</b>	29 Oct 2022	---
Machine Age	hrs	Client Info	0	---
Oil Age	hrs	Client Info	0	---
Oil Changed	Client Info	<b>Filtered</b>	Filtered	---
Sample Status		<b>ABNORMAL</b>	NORMAL	---

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	---
Chromium	ppm	ASTM D5185m >10	<b>0</b>	0	---
Nickel	ppm	ASTM D5185m >10	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m	<b>0</b>	0	---
Silver	ppm	ASTM D5185m	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >10	<b>0</b>	0	---
Lead	ppm	ASTM D5185m >10	<b>0</b>	0	---
Copper	ppm	ASTM D5185m >75	<b>0</b>	<1	---
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 5	<b>0</b>	<1	---
Barium	ppm	ASTM D5185m 5	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m 5	<b>0</b>	0	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	0	---
Magnesium	ppm	ASTM D5185m 25	<b>1</b>	0	---
Calcium	ppm	ASTM D5185m 200	<b>55</b>	48	---
Phosphorus	ppm	ASTM D5185m 300	<b>314</b>	353	---
Zinc	ppm	ASTM D5185m 370	<b>418</b>	423	---
Sulfur	ppm	ASTM D5185m 2500	<b>2270</b>	2451	---

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >20	<b>▲ 32</b>	<1	---
Sodium	ppm	ASTM D5185m	<b>0</b>	0	---
Potassium	ppm	ASTM D5185m >20	<b>0</b>	0	---

## FLUID CLEANLINESS






method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	<b>▲ 9676</b>	3422	---
Particles >6µm	ASTM D7647 >1300	<b>▲ 2147</b>	698	---
Particles >14µm	ASTM D7647 >160	<b>▲ 161</b>	97	---
Particles >21µm	ASTM D7647 >40	<b>▲ 50</b>	18	---
Particles >38µm	ASTM D7647 >10	<b>2</b>	1	---
Particles >71µm	ASTM D7647 >3	<b>0</b>	0	---
Oil Cleanliness	ISO 4406 (c) >19/17/14	<b>▲ 20/18/15</b>	19/17/14	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045 0.57	<b>0.34</b>	0.29	---




# OIL ANALYSIS REPORT

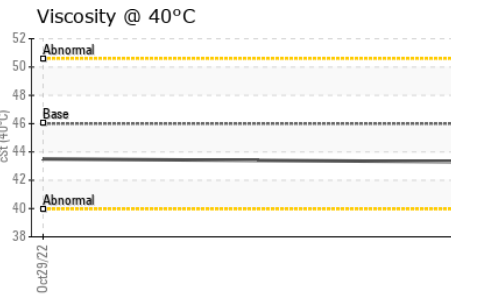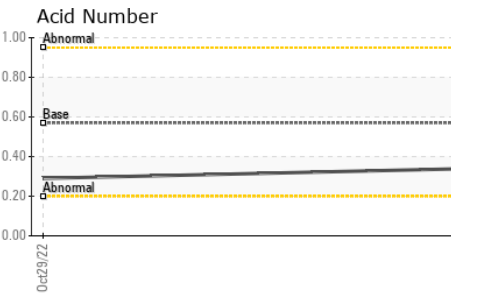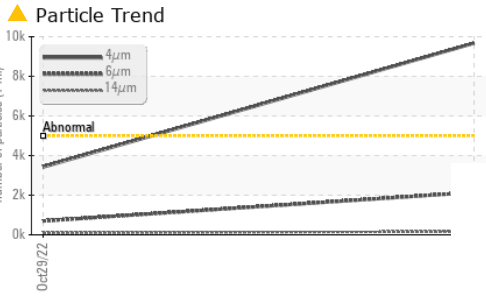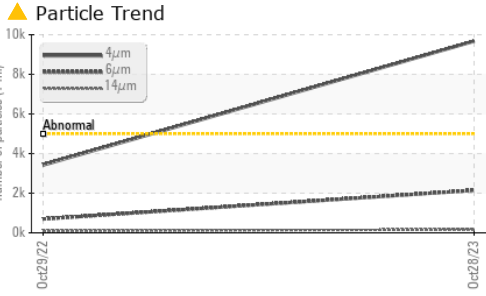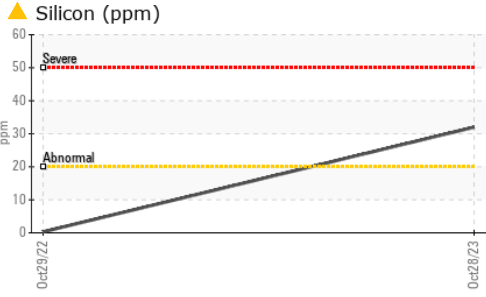





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	43.3	43.5

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

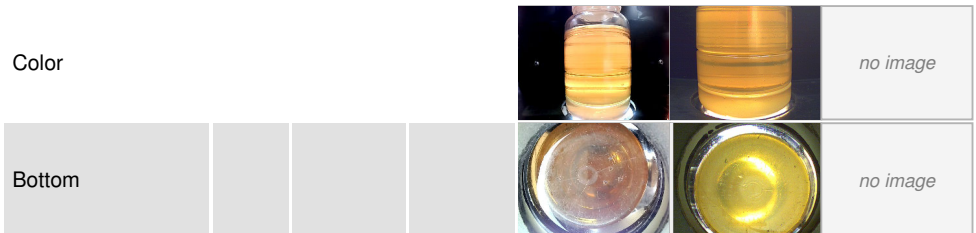

## GRAPHS

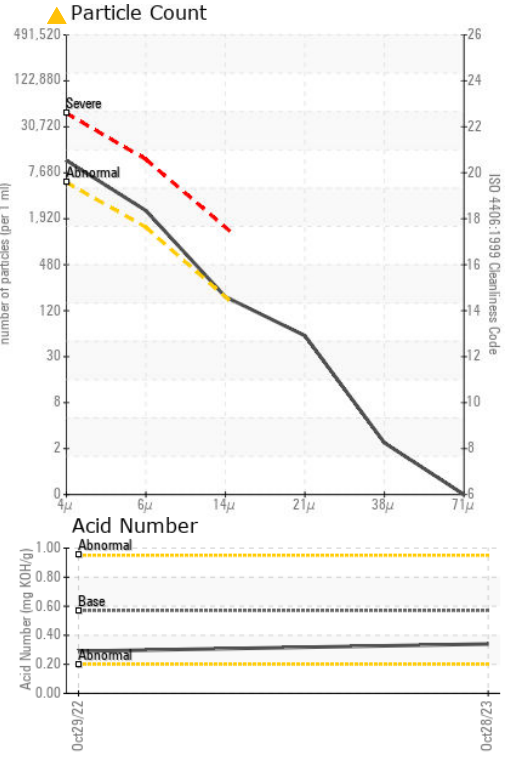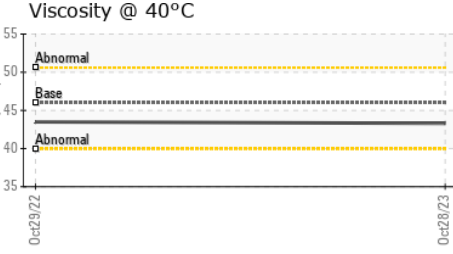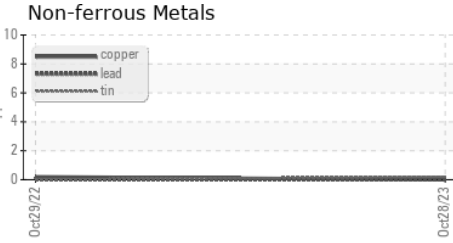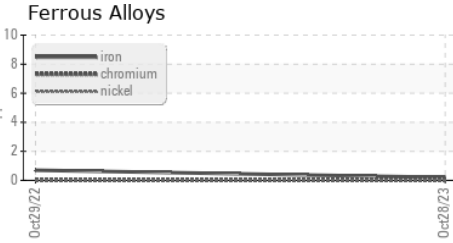

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0836609 **Received** : 03 Nov 2023  
**Lab Number** : 05997937 **Diagnosed** : 06 Nov 2023  
**Unique Number** : 10726297 **Diagnostician** : Don Baldrige  
**Test Package** : IND 2

**ADVANCED EQUIPMENT SALES**  
 535 HAGEY RD  
 SOUDERTON, PA  
 US 18964  
 Contact: JEFF BURNLEY  
 jburnley@aesales.net  
 T: (215)723-7200  
 F: (215)723-7201

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)