



PROBLEM SUMMARY

Sample Rating Trend


INSOLUBLES



Machine Id
P1-OHIO (S/N 2008024901)


Component
Hydraulic System

Fluid
PETRO CANADA PURITY FG HYDRAULIC AW 68 (800 LTR)

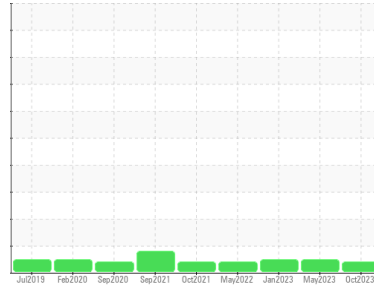

COMPONENT CONDITION SUMMARY

▲ Varnish Potential

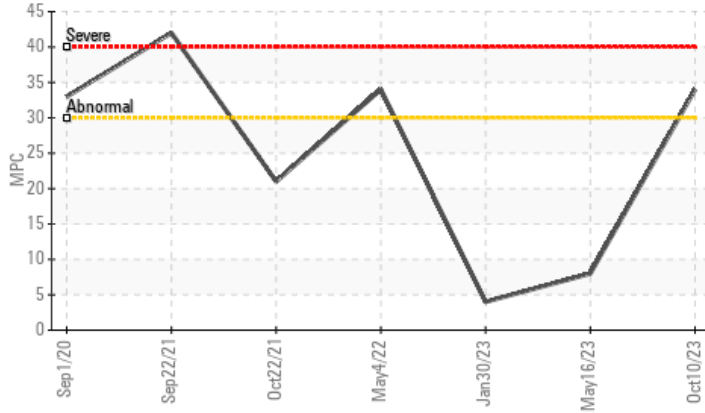

RECOMMENDATION

No corrective action is recommended at this time.
Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status		ABNORMAL	NORMAL	NORMAL
MPC Varnish Potential	Scale ASTM D7843 >15	▲ 34	8	4

Customer Id: IMLCAN
Sample No.: WC0699217
Lab Number: 05997955
Test Package: AOM 1



To manage this report scan the QR code

To discuss the diagnosis or test data:
Doug Bogart +1 (800)237-1369 x4016
dougb@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

16 May 2023 Diag: Doug Bogart

NORMAL



No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. MPC (Membrane Patch Colorimetry) test indicates acceptable levels of varnish present. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. Linear Sweep Voltammetry (RULER – ASTM D6971) testing indicates normal levels of anti-oxidants present in the oil. The condition of the oil is suitable for further service.

view report



30 Jan 2023 Diag: Doug Bogart

NORMAL



No corrective action is recommended at this time. The filter service at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. MPC (Membrane Patch Colorimetry) test indicates acceptable levels of varnish present. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. Linear Sweep Voltammetry (RULER – ASTM D6971) testing indicates normal levels of anti-oxidants present in the oil. The condition of the oil is suitable for further service.

view report



04 May 2022 Diag: Doug Bogart

INSOLUBLES



No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. MPC (Membrane Patch Colorimetry) test indicates a moderate concentration of varnish present. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

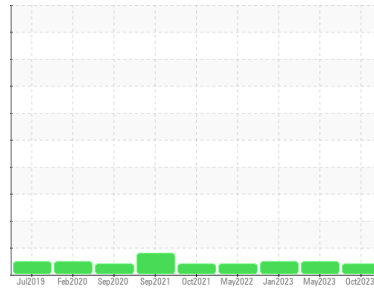

INSOLUBLES



Machine Id
P1-OHIO (S/N 2008024901)

Component
Hydraulic System

Fluid
PETRO CANADA PURITY FG HYDRAULIC AW 68 (800 LTR)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

MPC (Membrane Patch Colorimetry) test indicates a moderate concentration of varnish present. The amount and size of particulates present in the system are acceptable.

Fluid Condition

Linear Sweep Voltammetry (RULER – ASTM D6971) testing indicates normal levels of anti-oxidants present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0699217	WC0699215	WC0699210
Sample Date	Client Info		10 Oct 2023	16 May 2023	30 Jan 2023
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	3135	750	7300
Oil Changed	Client Info		Filtered	Changed	Filtered
Sample Status			ABNORMAL	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	0	0	0
Chromium	ppm	ASTM D5185m >20	0	0	0
Nickel	ppm	ASTM D5185m >20	0	0	0
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >20	0	0	0
Lead	ppm	ASTM D5185m >20	0	0	0
Copper	ppm	ASTM D5185m >20	0	0	0
Tin	ppm	ASTM D5185m >20	0	0	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0
Manganese	ppm	ASTM D5185m	0	0	0
Magnesium	ppm	ASTM D5185m	0	0	<1
Calcium	ppm	ASTM D5185m	1	0	2
Phosphorus	ppm	ASTM D5185m	432	490	426
Zinc	ppm	ASTM D5185m	2	0	1
Sulfur	ppm	ASTM D5185m	539	765	726

CONTAMINANTS






	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	1	2	2
Sodium	ppm	ASTM D5185m	0	0	<1
Potassium	ppm	ASTM D5185m >20	0	<1	<1
Water	%	ASTM D6304 >0.05	0.002	0.001	---
ppm Water	ppm	ASTM D6304 >500	20.5	0.00	---

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	696	57	270
Particles >6µm	ASTM D7647	>1300	228	19	50
Particles >14µm	ASTM D7647	>160	21	2	4
Particles >21µm	ASTM D7647	>40	6	1	1
Particles >38µm	ASTM D7647	>10	0	0	0
Particles >71µm	ASTM D7647	>3	0	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	17/15/12	13/11/9	15/13/9



OIL ANALYSIS REPORT

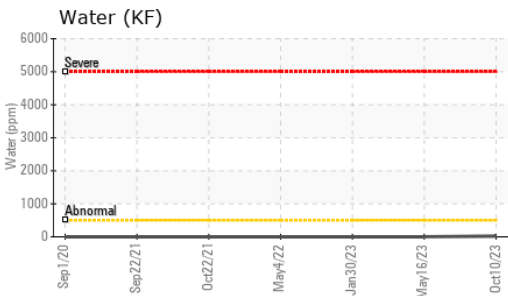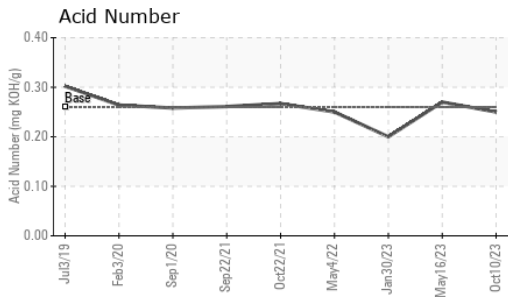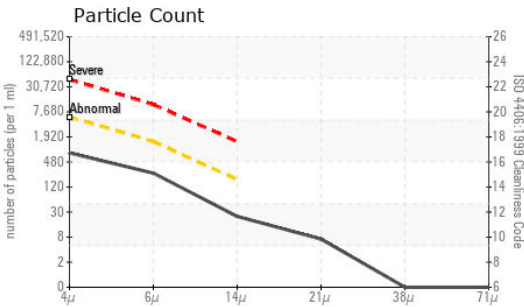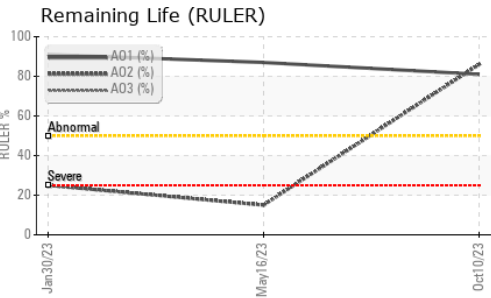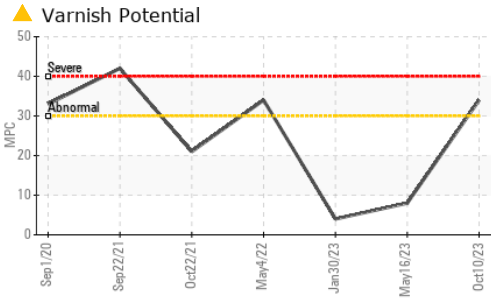


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	0.26	0.25	0.27	0.20
Anti-Oxidant 1	%	ASTM D6971	<25	81	87	91
Anti-Oxidant 2	%	ASTM D6971	<25	86	15	25
MPC Varnish Potential	Scale	ASTM D7843	>15	▲ 34	8	4

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	LIGHT	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	63.34	66.8	66.3	64.8


SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

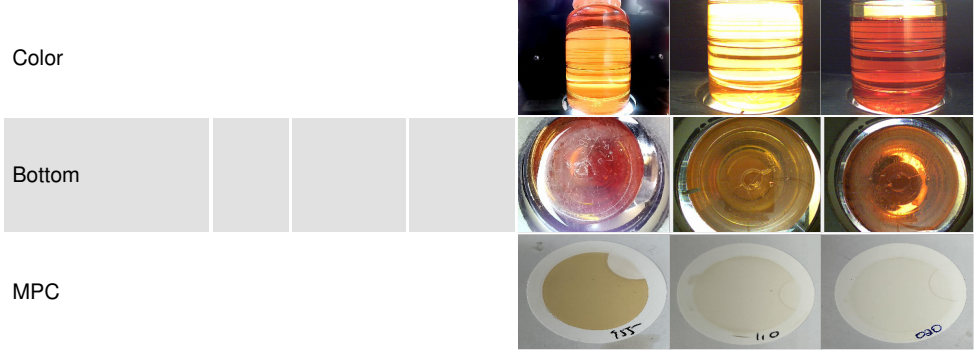


Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0699217 **Received** : 03 Nov 2023
Lab Number : **05997955** **Diagnosed** : 14 Nov 2023
Unique Number : 10726315 **Diagnostician** : Doug Bogart
Test Package : AOM 1 (Additional Tests: KF)

IML CONTAINERS OHIO
 5365 EAST CENTER DRIVE NORTHEAST, Suite D
 CANTON, OH
 US 44721
 Contact: Juliana Nesello
 sguiraldello@iml.com.br
 T: (330)754-1066
 F:


To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

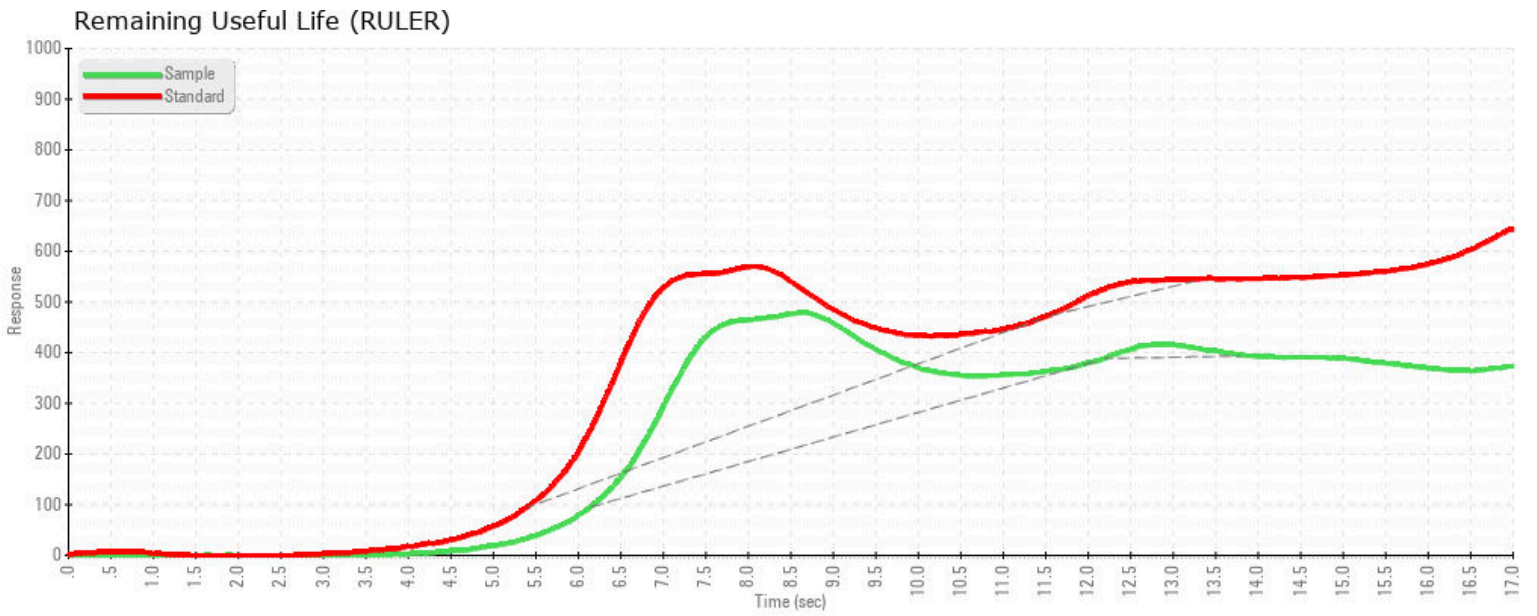

MPC (Varnish Test)

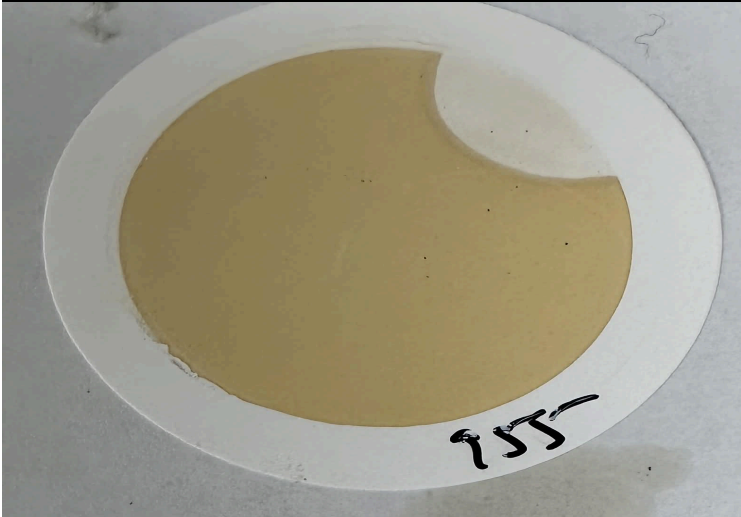

Sample Color & Clarity

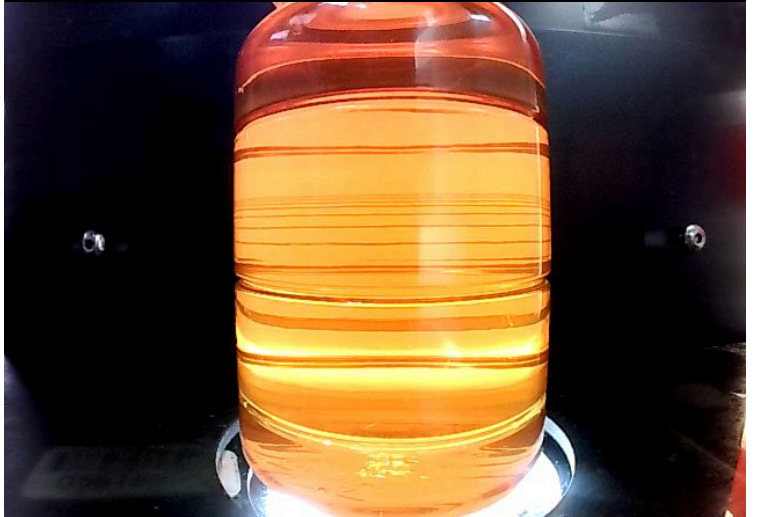

This page left intentionally blank