

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

Area West Molding Machine Id **132 (S/N 65000107)** Component

Hydraulic System Fluid AW HYDRAULIC OIL ISO 46 (400 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Aug2017	Jul2018 Sep2019	Feb2021 0ct2022	Sep2023	
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		RP0034701	RP0034635	RP0030210
Sample Date		Client Info		28 Sep 2023	12 May 2023	26 Oct 2022
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	1	3	2
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	0	0	0
Lead	ppm	ASTM D5185m	>20	<1	0	<1
Copper	ppm	ASTM D5185m	>20	3	3	2
Tin	ppm	ASTM D5185m	>20	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0	0	<1
Barium	ppm	ASTM D5185m	5	0	0	0
Molybdenum	ppm	ASTM D5185m	5	0	<1	<1
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m	25	5	4	3
Calcium	ppm	ASTM D5185m	200	113	145	127
Phosphorus	ppm	ASTM D5185m	300	334	390	354
Zinc	ppm	ASTM D5185m	370	416	461	405
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	<1	<1
Sodium	ppm	ASTM D5185m		2	2	1
Potassium	ppm	ASTM D5185m	>20	0	<1	0
Water	%	ASTM D6304	>0.05	0.005	0.005	0.006
ppm Water	ppm	ASTM D6304	>500	56.9	57.3	68.4
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>1300	279	470	▲ 5900
Particles >6µm		ASTM D7647	>160	87	150	1 674
Particles >14µm		ASTM D7647	>10	8	4 24	1 07
Particles >21µm		ASTM D7647	>3	3	<u> </u>	1 9
Particles >38µm		ASTM D7647	>3	0	1	2
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>17/14/10	15/14/10	▲ 16/14/12	▲ 20/18/14
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.32	0.40	0.49
(-)	0 - 0				-	



Water (KF)


6000


500

OIL ANALYSIS REPORT

scalar

*Visual

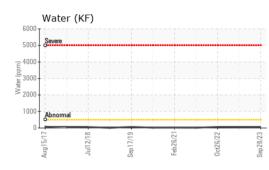

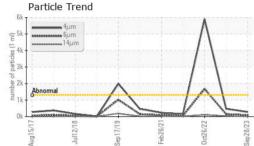

Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
			11 11 11		1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.	
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.3	44.5	44.5
SAMPLE IMAGES	3	method	limit/base	current	history1	history2
Color						
Bottom						

NONE


NONE

NONE

NONE

Bottom

White Metal

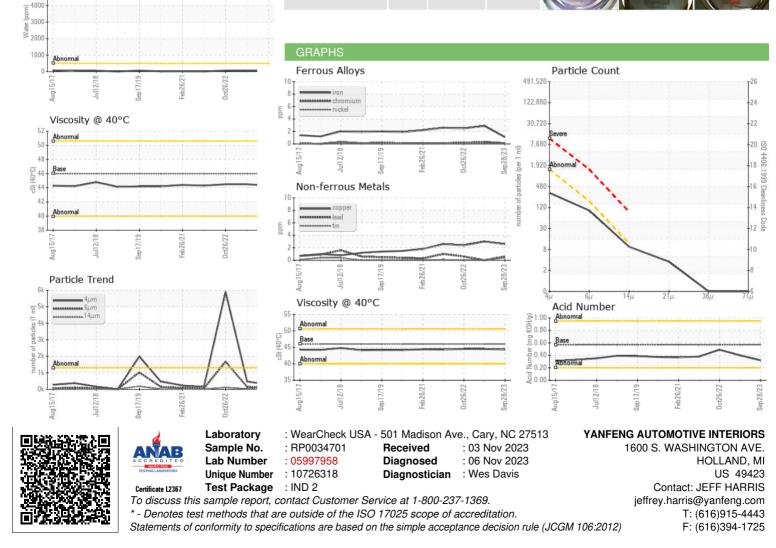

Submitted By: JEFF HARRIS

Page 2 of 2