




PROBLEM SUMMARY

Sample Rating Trend

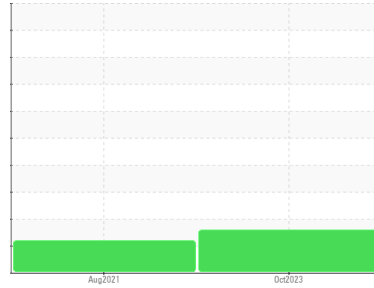


ISO



Machine Id
KAESER AIRCENTER SK 7.5 7446788 (S/N 1280)
 Component
Compressor
 Fluid
KAESER SIGMA (OEM) S-460 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

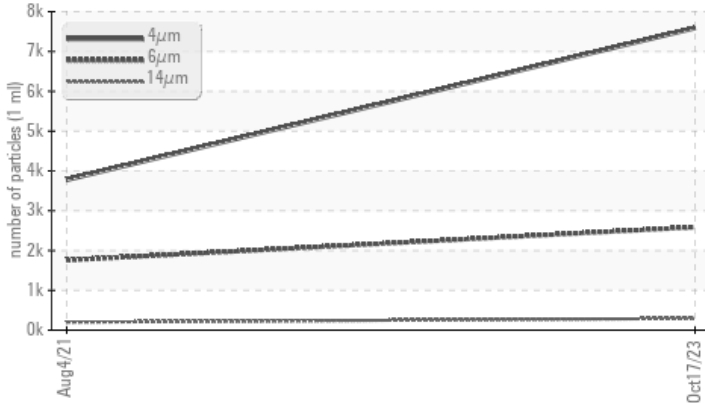

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	ATTENTION	---
Particles >6µm	ASTM D7647	>1300	▲ 2585	▲ 1757	---
Particles >14µm	ASTM D7647	>80	▲ 294	▲ 199	---
Particles >21µm	ASTM D7647	>20	▲ 64	▲ 34	---
Oil Cleanliness	ISO 4406 (c)	>--/17/13	▲ 20/19/15	▲ 18/15	---

Customer Id: PEOSUM
 Sample No.: KC125937
 Lab Number: 05997982
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

04 Aug 2021 Diag: Angela Borella

ISO



No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

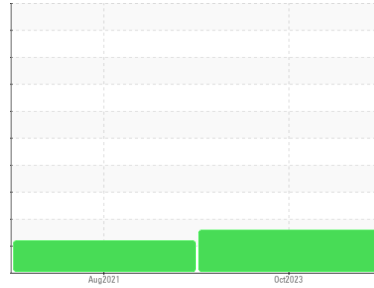

ISO



Machine Id
KAESER AIRCENTER SK 7.5 7446788 (S/N 1280)
 Component
Compressor
 Fluid
KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KC125937	KC99289	---
Sample Date	Client Info		17 Oct 2023	04 Aug 2021	---
Machine Age	hrs	Client Info	3213	989	---
Oil Age	hrs	Client Info	0	989	---
Oil Changed	Client Info		N/A	Changed	---
Sample Status			ABNORMAL	ATTENTION	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	0	2	---
Chromium	ppm	ASTM D5185m >10	0	0	---
Nickel	ppm	ASTM D5185m >3	0	0	---
Titanium	ppm	ASTM D5185m >3	0	0	---
Silver	ppm	ASTM D5185m >2	0	0	---
Aluminum	ppm	ASTM D5185m >10	0	<1	---
Lead	ppm	ASTM D5185m >10	0	<1	---
Copper	ppm	ASTM D5185m >50	<1	3	---
Tin	ppm	ASTM D5185m >10	<1	1	---
Antimony	ppm	ASTM D5185m	---	0	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	55	---
Barium	ppm	ASTM D5185m 90	0	0	---
Molybdenum	ppm	ASTM D5185m	0	0	---
Manganese	ppm	ASTM D5185m	<1	<1	---
Magnesium	ppm	ASTM D5185m 90	58	51	---
Calcium	ppm	ASTM D5185m 2	2	2	---
Phosphorus	ppm	ASTM D5185m	4	8	---
Zinc	ppm	ASTM D5185m	9	8	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<1	0	---
Sodium	ppm	ASTM D5185m	16	18	---
Potassium	ppm	ASTM D5185m >20	<1	2	---
Water	%	ASTM D6304 >0.05	0.023	0.026	---
ppm Water	ppm	ASTM D6304 >500	237.5	261.5	---

FLUID CLEANLINESS


	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		7588	3773	---
Particles >6µm	ASTM D7647	>1300	▲ 2585	▲ 1757	---
Particles >14µm	ASTM D7647	>80	▲ 294	▲ 199	---
Particles >21µm	ASTM D7647	>20	▲ 64	▲ 34	---
Particles >38µm	ASTM D7647	>4	1	1	---
Particles >71µm	ASTM D7647	>3	0	0	---
Oil Cleanliness	ISO 4406 (c)	>--/17/13	▲ 20/19/15	▲ 18/15	---

FLUID DEGRADATION


	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.4	0.32	0.312	---

OIL ANALYSIS REPORT


▲ Particle Trend

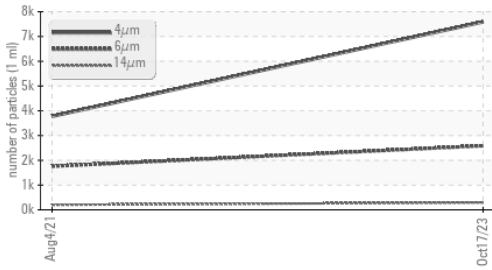


Water (KF)

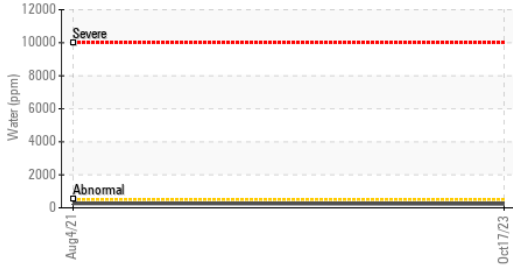

Acid Number

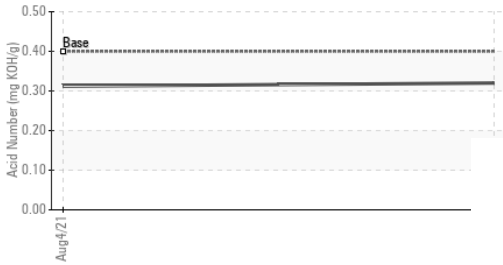

Water (KF)

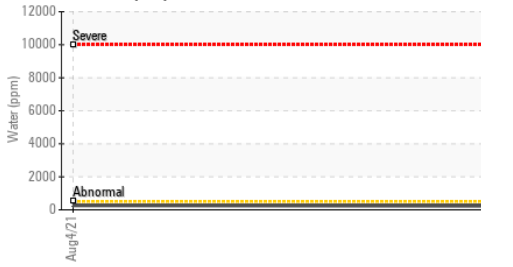


Viscosity @ 40°C







VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	43.9	44.3	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

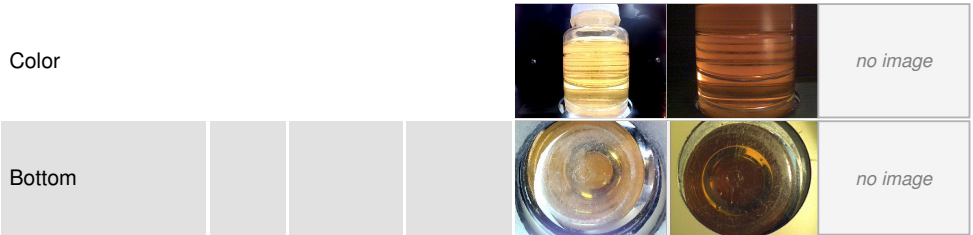

GRAPHS

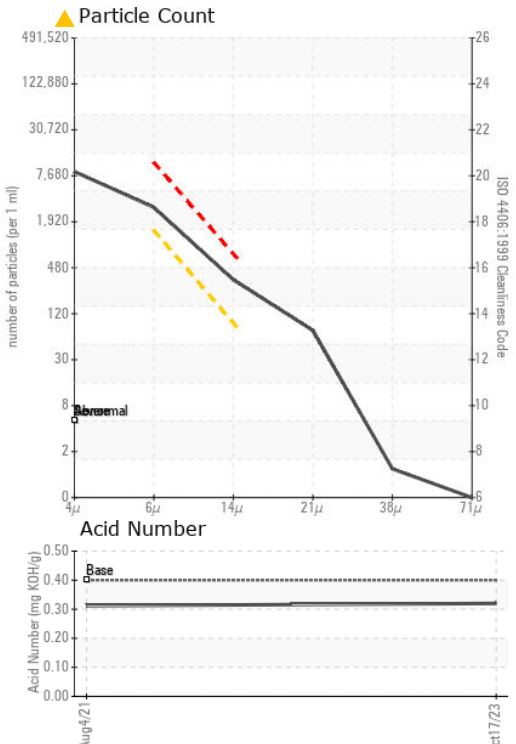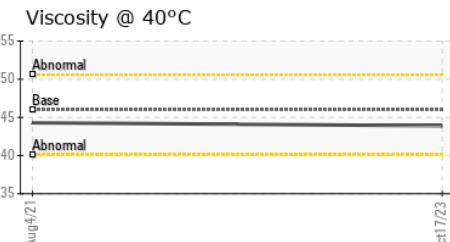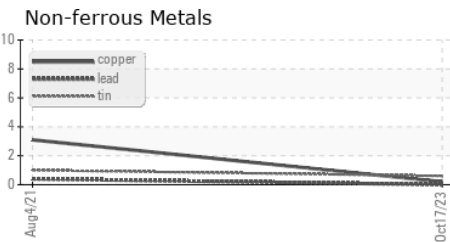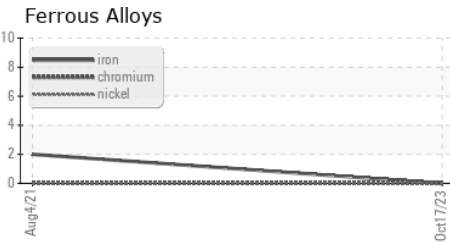

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KC125937 **Received** : 03 Nov 2023
Lab Number : 05997982 **Diagnosed** : 06 Nov 2023
Unique Number : 10726342 **Diagnostician** : Don Baldrige
Test Package : IND 2

PEOTTERS AUTO BODY
 186 BROAD ST
 SUMMIT, NJ
 US 07901
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: