


PROBLEM SUMMARY

KAESER SX 7.5 3300120 (S/N 1005)

Compressor Fluid

KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

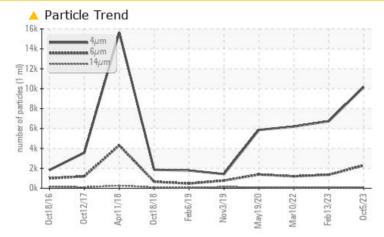

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS							
Sample Status			ATTENTION	ATTENTION	NORMAL		
Particles >6µm	ASTM D7647	>1300	<u> </u>	1 359	1194		
Oil Cleanliness	ISO 4406 (c)	>/17/13	A 21/18/13	▲ 20/18/13	17/13		


Customer Id: KVSLOU Sample No.: KCPA006899 Lab Number: 05997992 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

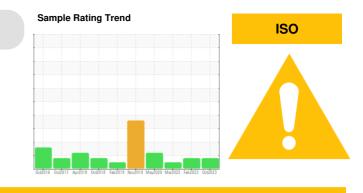

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

13 Feb 2023 Diag: Don Baldridge

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time.

Resample at the next service interval to monitor.All component wear rates are normal. There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

10 Mar 2022 Diag: Angela Borella



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.




view report

view report

19 May 2020 Diag: Don Baldridge

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a moderate amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.







OIL ANALYSIS REPORT

Machine Id KAESER SX 7.5 3300120 (S/N 1005) Component

Compressor Fluid

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

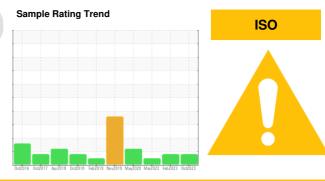

SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA006899	KCP49163	KCP38053
Sample Number		Client Info				10 Mar 2022
Sample Date	la va			05 Oct 2023	13 Feb 2023	
Machine Age	hrs	Client Info		96168 0	90562 7981	82581 4264
Oil Age	hrs	Client Info Client Info		-		
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				ATTENTION	ATTENTION	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>10	0	0	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	11	10	29
Tin	ppm	ASTM D5185m	>10	<1	0	0
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	1
Barium	ppm	ASTM D5185m	90	1	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m	100	4	1	0
Calcium	ppm	ASTM D5185m	0	1	0	0
Phosphorus	ppm	ASTM D5185m	0	1	7	2
Zinc	ppm	ASTM D5185m	0	35	29	29
Sulfur	ppm	ASTM D5185m	23500	17924	22552	15325
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	2	<1
Sodium	ppm	ASTM D5185m		2	2	<1
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water	%	ASTM D6304		0.007	0.008	0.006
ppm Water	ppm	ASTM D6304		73.1	84.1	67.4
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		10157	6733	6198
Particles >6µm		ASTM D7647	>1300	A 2296	1 359	1194
Particles >14µm		ASTM D7647	>80	73	67	71
Particles >21µm		ASTM D7647	>20	14	20	17
Particles >38µm		ASTM D7647	>4	0	1	1
Particles >71µm		ASTM D7647		0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u> </u>	2 0/18/13	17/13
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)				0.36	0.40	0.43
ACIO INUMBER (AIN)	IIIU NUH/0	AD LIVI 100045	1.0	0.30	0.40	0.45

Acid Number (AN)

0.36 0.40 0.43


Report Id: KVSLOU [WUSCAR] 05997992 (Generated: 11/06/2023 13:11:05) Rev: 1


mg KOH/g ASTM D8045 1.0


Contact/Location: SERVICE MANAGER ? - KVSLOU




OIL ANALYSIS REPORT

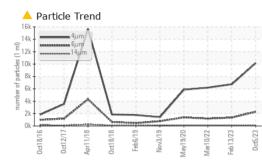

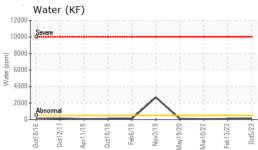

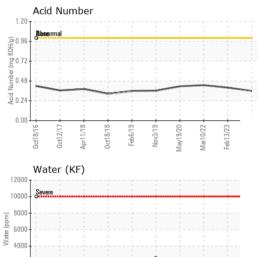




VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	VLITE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPER	TIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	50.3	51.6	52.6
SAMPLE IMAGE	S	method	limit/base	current	history1	history2

Color



Bottom

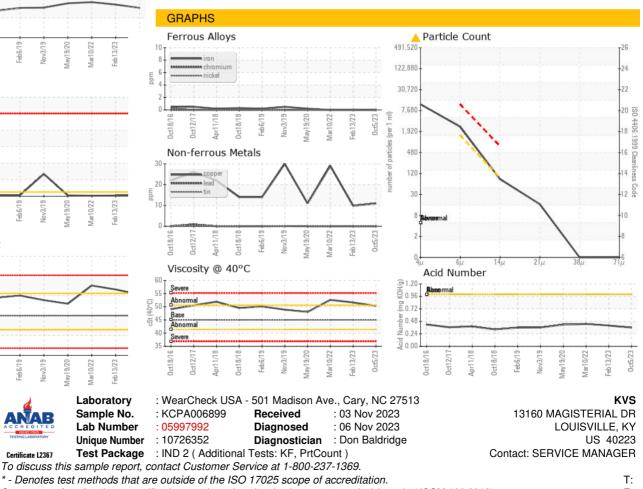

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367