




# PROBLEM SUMMARY

Sample Rating Trend

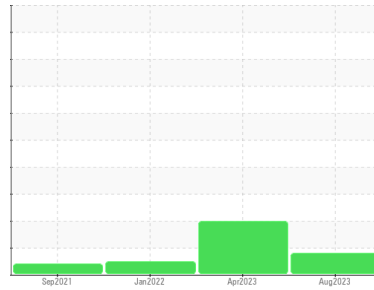

## WEAR




Area  
**[K43188]**  
 Machine Id  
**7567476 (S/N 1049)**

Component  
**Compressor**  
 Fluid  
**KAESER SIGMA (OEM) S-460 (--- GAL)**

### COMPONENT CONDITION SUMMARY

#### ▲ Ferrous Alloys

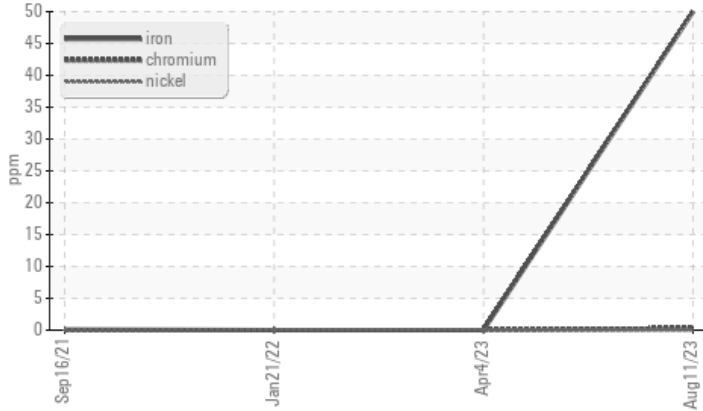

### RECOMMENDATION

No corrective action is recommended at this time.  
 Resample at the next service interval to monitor.

### PROBLEMATIC TEST RESULTS

Sample Status				MARGINAL	ABNORMAL	NORMAL
Iron	ppm	ASTM D5185m	>50	▲ 50	0	0

Customer Id: JAICHI  
 Sample No.: KC101186  
 Lab Number: 05998008  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

*There are no recommended actions for this sample.*

## HISTORICAL DIAGNOSIS

### 04 Apr 2023 Diag: Don Baldrige

ISO



No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 21 Jan 2022 Diag: Angela Borella

NORMAL



The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample. All component wear rates are normal. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 16 Sep 2021 Diag: Don Baldrige

VIS DEBRIS




No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample. All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



# OIL ANALYSIS REPORT

Sample Rating Trend

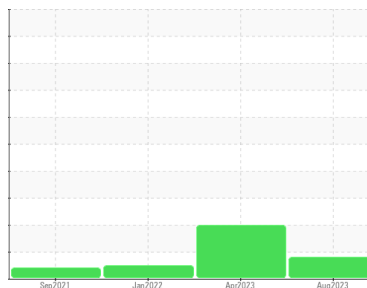

**WEAR**



Area  
**[K43188]**  
Machine Id  
**7567476 (S/N 1049)**

Component  
**Compressor**  
Fluid  
**KAESER SIGMA (OEM) S-460 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### ▲ Wear

The iron level is marginal. All other component wear rates are normal.

### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KC101186</b>	KC107534	KC96092
Sample Date	Client Info			<b>11 Aug 2023</b>	04 Apr 2023	21 Jan 2022
Machine Age	hrs	Client Info		<b>14480</b>	12515	5914
Oil Age	hrs	Client Info		<b>4130</b>	2202	3718
Oil Changed	Client Info			<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status				<b>MARGINAL</b>	ABNORMAL	NORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	▲ <b>50</b>	0	0
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	<1
Lead	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>50	<b>9</b>	4	9
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	2	<1
Antimony	ppm	ASTM D5185m		<b>0</b>	---	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>55</b>	0	0
Barium	ppm	ASTM D5185m	90	<b>0</b>	29	0
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Manganese	ppm	ASTM D5185m		<b>3</b>	<1	0
Magnesium	ppm	ASTM D5185m	90	<b>2</b>	45	0
Calcium	ppm	ASTM D5185m	2	<b>90</b>	1	0
Phosphorus	ppm	ASTM D5185m		<b>150</b>	0	6
Zinc	ppm	ASTM D5185m		<b>14</b>	5	0

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>7</b>	0	<1
Sodium	ppm	ASTM D5185m		<b>4</b>	9	<1
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	40	0
Water	%	ASTM D6304	>0.05	<b>0.004</b>	0.013	0.001
ppm Water	ppm	ASTM D6304	>500	<b>46.3</b>	136.3	3.0

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>260</b>	4496	---
Particles >6µm		ASTM D7647	>1300	<b>92</b>	▲ 2840	---
Particles >14µm		ASTM D7647	>80	<b>19</b>	▲ 973	---
Particles >21µm		ASTM D7647	>20	<b>8</b>	▲ 358	---
Particles >38µm		ASTM D7647	>4	<b>2</b>	▲ 33	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	2	---
Oil Cleanliness		ISO 4406 (c)	>--/17/13	<b>15/14/11</b>	▲ 19/19/17	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	<b>0.42</b>	0.45	0.42


# OIL ANALYSIS REPORT

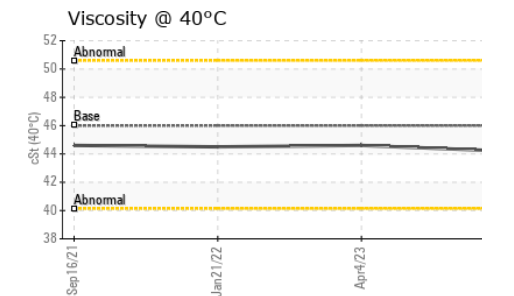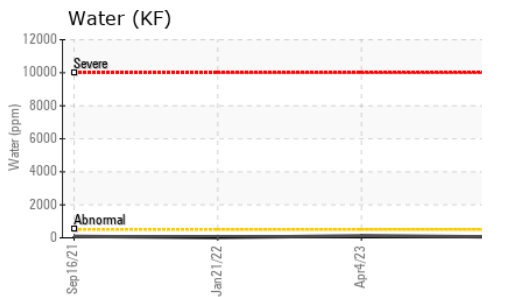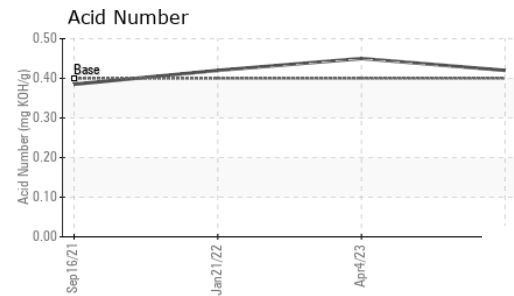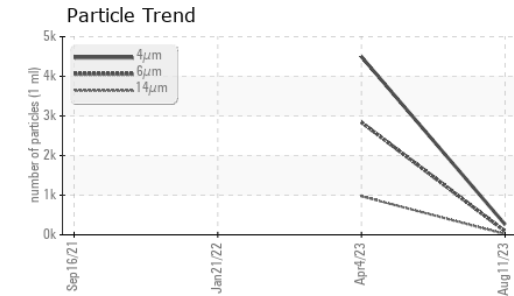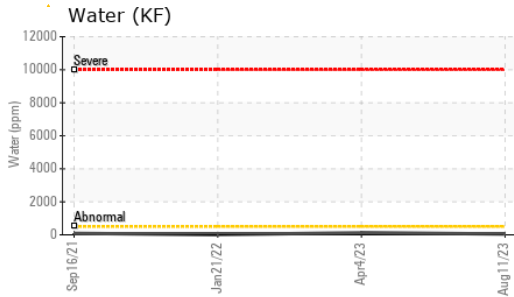






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.2	44.6

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

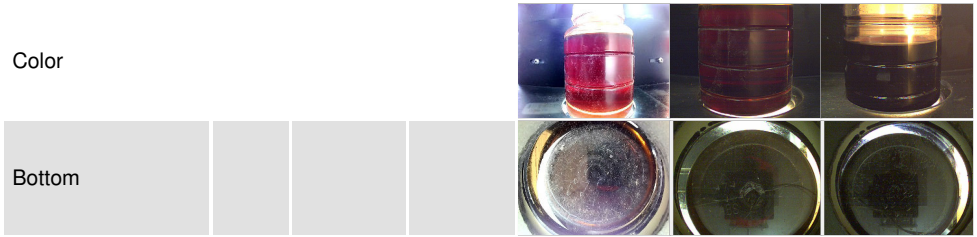

## GRAPHS

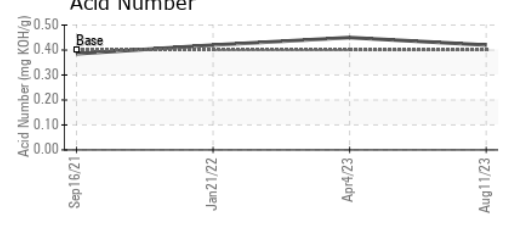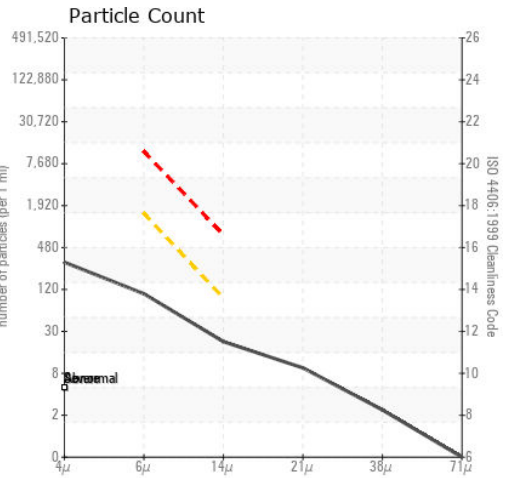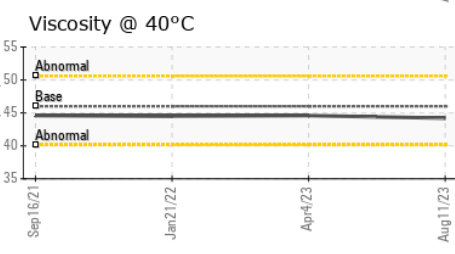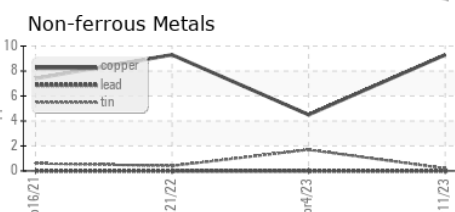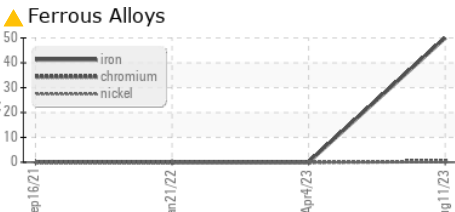

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KC101186 **Received** : 03 Nov 2023  
**Lab Number** : 05998008 **Diagnosed** : 06 Nov 2023  
**Unique Number** : 10726368 **Diagnostician** : Don Baldrige  
**Test Package** : IND 2

**JAIN AMERICAS**  
 1000 SHERIDAN ST  
 CHICOPEE, MA  
 US 01022  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: