




# OIL ANALYSIS REPORT

Sample Rating Trend

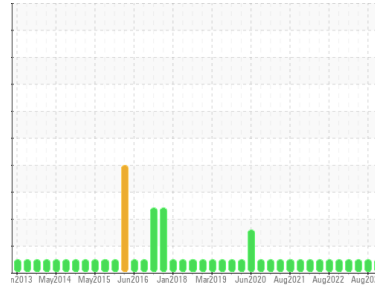

**NORMAL**



Machine Id  
**KAESER AC 2 (S/N 01197-002-1-01-02)**

Component  
**Air Compressor**

Fluid  
**KAESER SIGMA (OEM) M-460 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of silt (particulates < 6 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>USP243325</b>	USP243326	USP243323
Sample Date	Client Info			<b>27 Oct 2023</b>	01 Aug 2023	08 May 2023
Machine Age	hrs	Client Info		<b>61399</b>	60359	59431
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>0</b>	0	<1
Chromium	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>10	<b>3</b>	<1	<1
Lead	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m	>40	<b>&lt;1</b>	2	1
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	90	<b>0</b>	0	2
Molybdenum	ppm	ASTM D5185m	0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185m	100	<b>23</b>	0	6
Calcium	ppm	ASTM D5185m	0	<b>2</b>	0	<1
Phosphorus	ppm	ASTM D5185m	0	<b>1</b>	0	<1
Zinc	ppm	ASTM D5185m	0	<b>56</b>	30	44
Sulfur	ppm	ASTM D5185m	23500	<b>19030</b>	21628	21620

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>16</b>	13	11
Sodium	ppm	ASTM D5185m		<b>9</b>	0	3
Potassium	ppm	ASTM D5185m	>20	<b>6</b>	<1	3
Water	%	ASTM D6304	>0.6	<b>0.013</b>	0.014	0.009
ppm Water	ppm	ASTM D6304	>6000	<b>138.3</b>	148.0	96.9

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>12378</b>	315	1367
Particles >6µm		ASTM D7647	>1300	<b>903</b>	84	237
Particles >14µm		ASTM D7647	>80	<b>10</b>	10	26
Particles >21µm		ASTM D7647	>20	<b>3</b>	2	5
Particles >38µm		ASTM D7647	>4	<b>0</b>	0	0
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>--/17/13	<b>21/17/10</b>	15/14/10	18/15/12

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	<b>0.40</b>	0.57	0.41


# OIL ANALYSIS REPORT

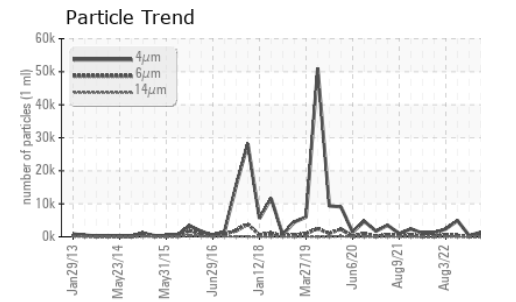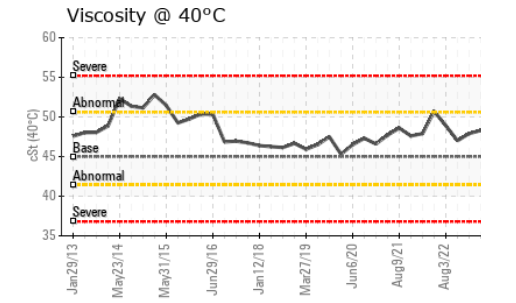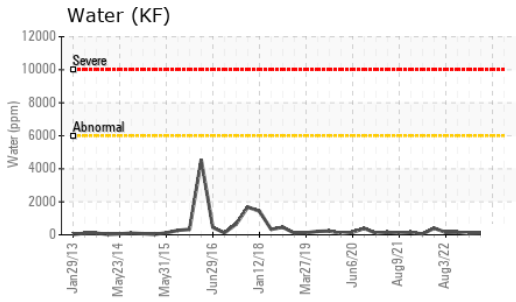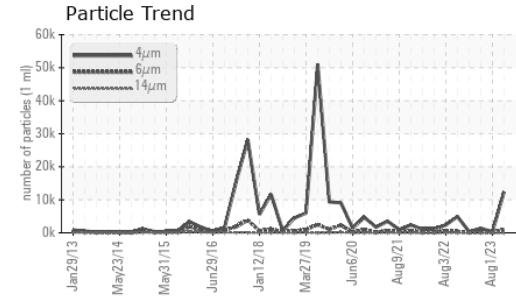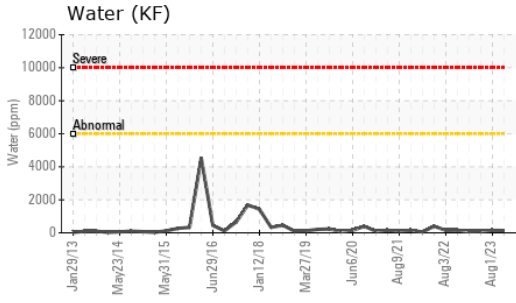






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.6	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 45	47.7	49.2	48.3

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

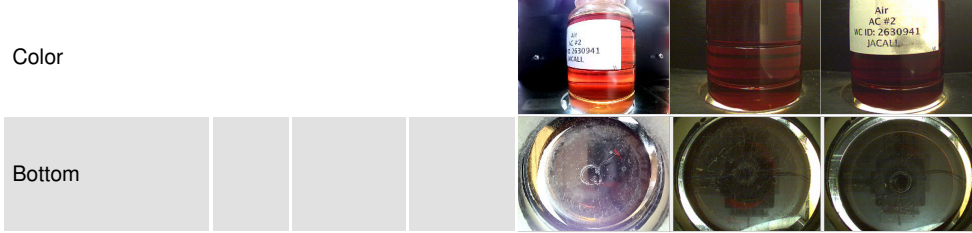

## GRAPHS

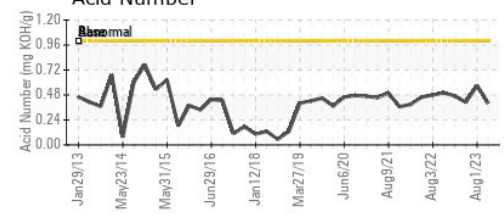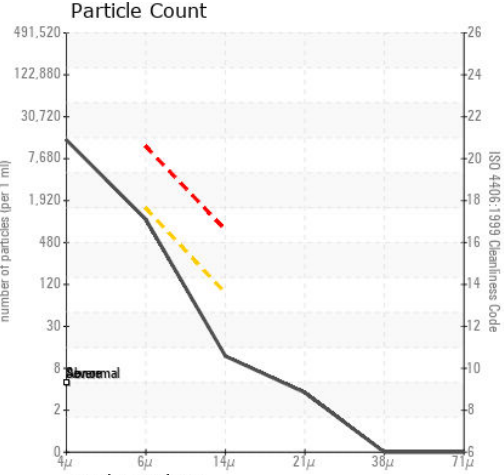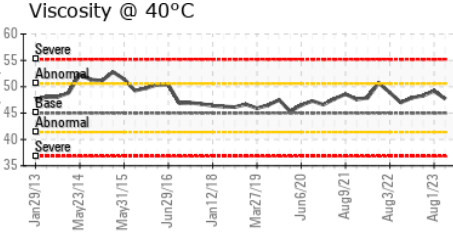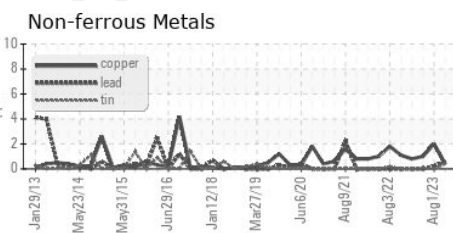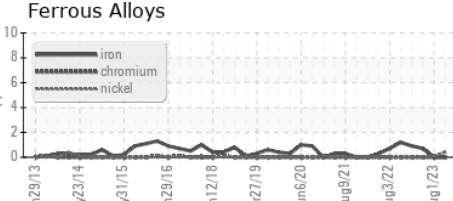

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : USP243325 **Received** : 03 Nov 2023  
**Lab Number** : 05998030 **Diagnosed** : 06 Nov 2023  
**Unique Number** : 10726390 **Diagnostician** : Doug Bogart  
**Test Package** : IND 2

**JACOBS TECHNOLOGIES**  
 ALLEN PARK, MI  
 US  
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: