

OIL ANALYSIS REPORT

Sample Rating Trend





Component Refrigeration Compressor Fluid FRICK COMPRESSOR OIL #3 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0003061		
Sample Date		Client Info		25 Oct 2023		
Machine Age	hrs	Client Info		4		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	0		
Chromium	ppm	ASTM D5185m	>2	0		
Nickel	ppm	ASTM D5185m	~ -	<1		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>3	0		
Lead	ppm	ASTM D5185m	>2	<1		
Copper	ppm	ASTM D5185m	>8	0		
Tin	ppm	ASTM D5185m	>0 >4	۰ <1		
Vanadium	ppm	ASTM D5185m	77	0		
Cadmium	ppm	ASTM D5185m		0		
	ррпп	ASTIVI DJIOJIII		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		1		
Calcium	ppm	ASTM D5185m		1		
Phosphorus	ppm	ASTM D5185m		1		
Zinc	ppm	ASTM D5185m		0		
Sulfur	ppm	ASTM D5185m		19		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	<1		
Water	%	ASTM D6304	>0.01	0.003		
ppm Water	ppm	ASTM D6304	>100	25.3		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	320		
Particles >6µm		ASTM D7647	>2500	88		
Particles >14µm		ASTM D7647	>320	10		
Particles >21µm		ASTM D7647	>80	4		
Particles >38µm		ASTM D7647	>20	0		
Particles >71µm		ASTM D7647	>4	0		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	15/14/10		
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974		0.013		



OIL ANALYSIS REPORT

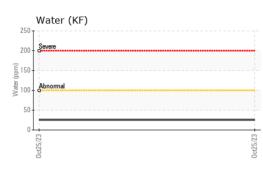



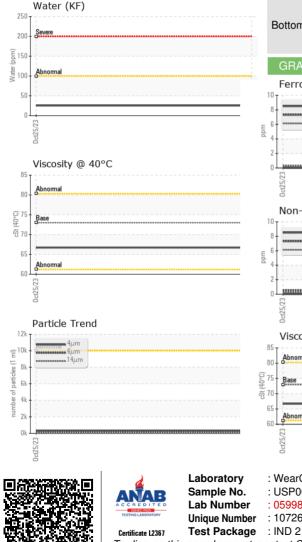

*Visual NONE NONE White Metal scalar ----Yellow Metal *Visual NONE NONE scalar Precipitate scalar *Visua NONE NONE Silt scalar *Visual NONE NONE Debris *Visual NONE NONE scalar NONE NONE Sand/Dirt scalar *Visual NORML Appearance *Visual NORML scalar Odor *Visual NORML NORML scalar **Emulsified Water** scalar *Visual >0.01 NEG Free Water scalar *Visual NEG FLUID PROPERTIES Visc @ 40°C cSt ASTM D445 73 66.7 SAMPLE IMAGES Color no image no image Bottom no image no image GRAPHS Ferrous Alloys Particle Count 491,52 122,88 30 72 7.68 4406 per 1 1,920 :1999 Cle Non-ferrous Metals 480 120 14 30 214 Viscosity @ 40°C Acid Number (B) Abnorma (mg KOH) 0.01 Acid 0.00 **CENTRAL STORAGE & WAREHOUSE CO** : WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 03 Nov 2023 12725 4 MILE RD : USP0003061 FRANKSVILLE, WI : 05998048 Diagnosed : 06 Nov 2023 : Doug Bogart : 10726408 Diagnostician US 53126

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: Service Manager

^{* -} Denotes test methods that are outside of the ISO 17025 scope of accreditation.