

# **PROBLEM SUMMARY**

Sample Rating Trend


ISO

# Machine Id KAESER AS 30 4967538 (S/N 1258)

Compressor

KAESER SIGMA (OEM) FG-460 (--- GAL)

#### **COMPONENT CONDITION SUMMARY**

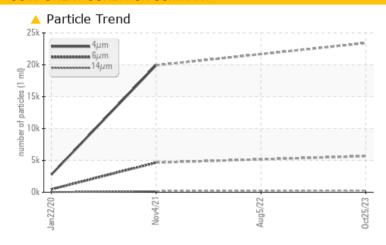

#### RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS									
Sample Status			<b>ABNORMAL</b>	ABNORMAL	ABNORMAL				
Particles >6µm	ASTM D7647	>1300	<b>△</b> 5677		<b>△</b> 4657				
Particles >14µm	ASTM D7647	>80	<b>276</b>		<b>▲</b> 177				
Particles >21µm	ASTM D7647	>20	<b>43</b>		<u>44</u>				
Oil Cleanliness	ISO 4406 (c)	>/17/13	<b>22/20/15</b>		▲ 19/15				

Customer Id: MENEDW Sample No.: KCPA007194 Lab Number: 05998442 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

#### **RECOMMENDED ACTIONS**

There are no recommended actions for this sample.

#### HISTORICAL DIAGNOSIS

#### 05 Aug 2022 Diag: Jonathan Hester

#### VIS DEBRIS



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



#### 04 Nov 2021 Diag: Don Baldridge

ISO



No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



#### 22 Jan 2020 Diag: Jonathan Hester

NORMAL




Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





# **OIL ANALYSIS REPORT**

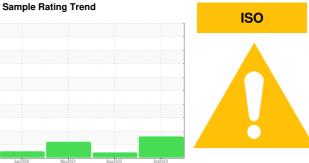

# KAESER AS 30 4967538 (S/N 1258)

Compressor

KAESER SIGMA (OEM) FG-460 (--- GAL)

#### **DIAGNOSIS**

#### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.

#### **Fluid Condition**


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Jan 202	0 Nov2021	Aug <sup>2</sup> 022 Oc	12023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA007194	KCP48223	KCP39998
Sample Date		Client Info		25 Oct 2023	05 Aug 2022	04 Nov 2021
Machine Age	hrs	Client Info		63475	60861	58269
Oil Age	hrs	Client Info		0	2000	3000
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	9	2
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	<1
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	<1	0
Aluminum	ppm	ASTM D5185m	>10	0	6	6
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper	ppm	ASTM D5185m	>50	2	3	2
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m				6
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	2
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		0	1	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m	500	0	185	50
Zinc	ppm	ASTM D5185m		0	93	9
Sulfur	ppm	ASTM D5185m		1218	1748	2021
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	<1	<1
Sodium	ppm	ASTM D5185m		<1	1	<1
Potassium	ppm	ASTM D5185m	>20	0	0	6
Water	%	ASTM D6304	>0.05	0.003	0.009	0.003
ppm Water	ppm	ASTM D6304	>500	36.0	92.2	37.2
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647		23413		19936
Particles >6µm		ASTM D7647	>1300	<u>▲</u> 5677		<u>▲</u> 4657
Particles >14μm		ASTM D7647	>80	<b>276</b>		<u> </u>
Particles >21µm		ASTM D7647	>20	<b>△</b> 43		<u>44</u>
Particles >38μm		ASTM D7647	>4	1		1
Particles >71μm		ASTM D7647	>3	0		0
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>22/20/15</u>		<b>△</b> 19/15
FLUID DEGRADA	TION	method	limit/base	current	history1	history2

0.386



### **OIL ANALYSIS REPORT**

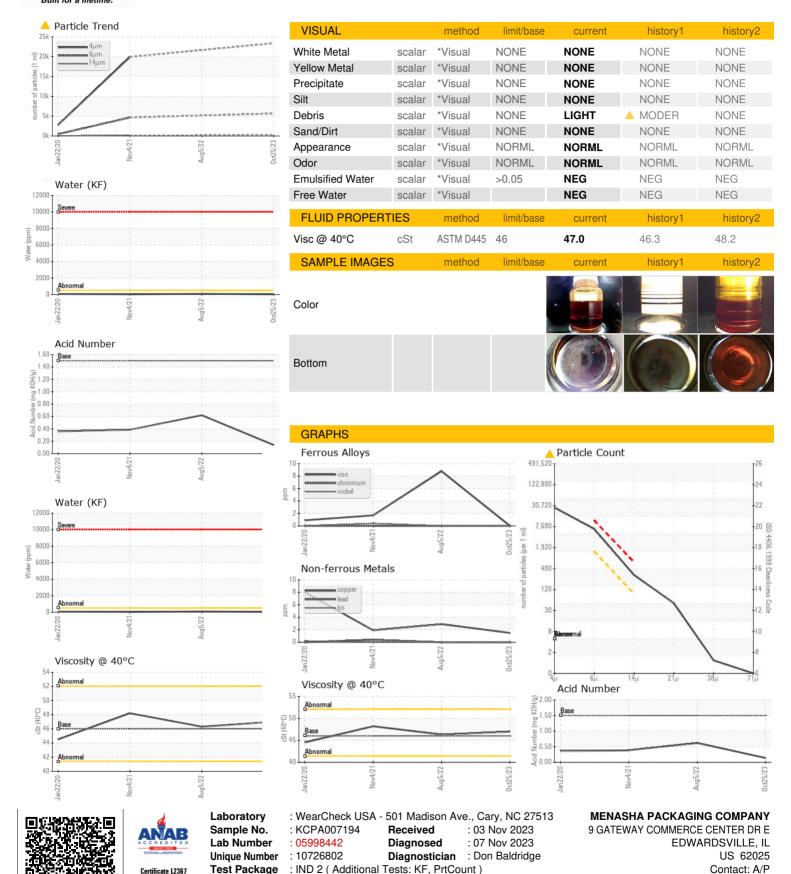

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

ssc.ap@menasha.com

T:

F: