

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

KAESER AS 25T 4982705 (S/N 1397)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2		
Sample Number		Client Info		KCPA006928	KCP55748	KCP13817		
Sample Date		Client Info		31 Oct 2023	30 Jan 2023	04 Feb 2019		
Machine Age	hrs	Client Info		19707	16380	9125		
Oil Age	hrs	Client Info		0	2720	0		
Oil Changed		Client Info		N/A	Changed	Changed		
Sample Status				NORMAL	NORMAL	ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>50	0	<1	<1		
Chromium	ppm	ASTM D5185m	>10	0	0	0		
Nickel	ppm	ASTM D5185m	>3	0	0	0		
Titanium	ppm	ASTM D5185m		0	0	0		
Silver	ppm	ASTM D5185m	>2	0	0	0		
Aluminum		ASTM D5185m		0	0	<1		
	ppm		>10	0	0	<1		
Lead	ppm	ASTM D5185m		14	4	4		
Copper	ppm	ASTM D5185m						
Tin	ppm	ASTM D5185m	>10	0	0	0		
Antimony	ppm	ASTM D5185m				0		
Vanadium	ppm	ASTM D5185m		0	0	0		
Cadmium	ppm	ASTM D5185m		0	0	0		
ADDITIVES		method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m		0	0	0		
Barium	ppm	ASTM D5185m	90	0	12	0		
Molybdenum	ppm	ASTM D5185m		0	0	0		
Manganese	ppm	ASTM D5185m		0	0	0		
Magnesium	ppm	ASTM D5185m	90	0	55	3		
Calcium	ppm	ASTM D5185m	2	0	0	0		
Phosphorus	ppm	ASTM D5185m		0	28	353		
Zinc	ppm	ASTM D5185m		17	22	3		
Sulfur	ppm	ASTM D5185m		15905	21490	10601		
CONTAMINANTS	pp	method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>25	0	<1	<1		
Sodium	ppm	ASTM D5185m		<1	23	4		
Potassium	ppm	ASTM D5185m		0	1	0		
Water	%	ASTM D6304	>0.05	0.009	0.013	0.002		
ppm Water	ppm	ASTM D6304	>500	93.1	134.0	20		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2		
Particles >4µm		ASTM D7647		601	792	2526		
Particles >6µm		ASTM D7647	>1300	183	177	814		
Particles >14µm		ASTM D7647	>80	13	6) 99		
Particles >21µm		ASTM D7647	>20	3	1	15		
Particles >38µm		ASTM D7647	>4	0	1	0		
Particles >71µm		ASTM D7647	>3	0	1	0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	16/15/11	17/15/10	▲ 17/14		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2		
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.38	0.32	0.227		
:07:47) Rev: 1					Contact/Location: M. BAUGHN - AMELOC			


Report Id: AMELOC [WUSCAR] 05998450 (Generated: 11/07/2023 15:07:47) Rev: 1


Contact/Location: M. BAUGHN - AMELOC




OIL ANALYSIS REPORT

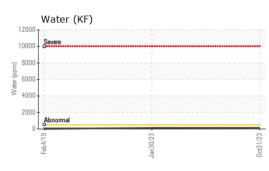

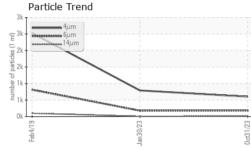

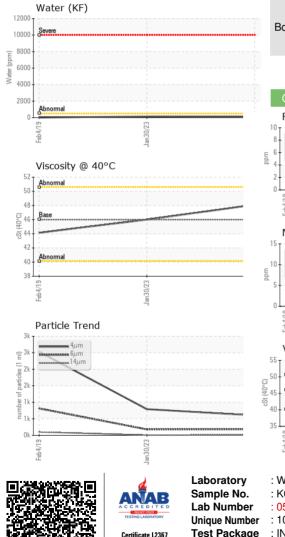

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	VLITE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	48.1	46.0	44.14
SAMPLE IMAGES	3	method	limit/base	current	history1	history2
Color				a.		
Bottom					\bigcirc	

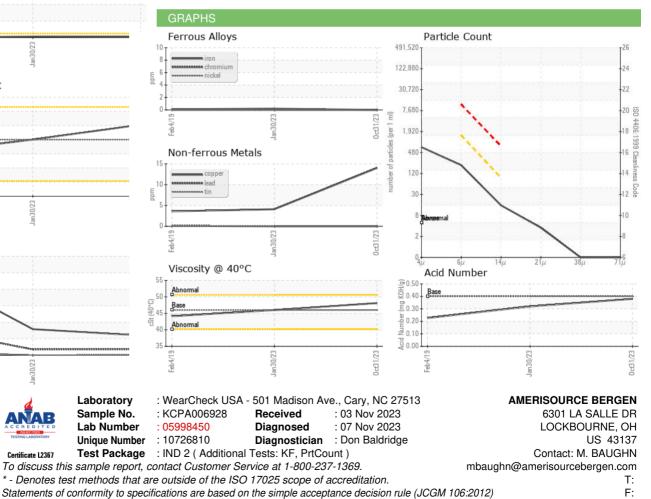

Contact/Location: M. BAUGHN - AMELOC