

# **OIL ANALYSIS REPORT**

Sample Rating Trend

NORMAL



ATLAS COPCO ATLAS 1 (S/N API625783)

Air Compressor

# Inc2018 Dec2019 Juc2013 May2020 Jun2021 Sep2022 Juc2023



USPI AIR 46 (--- GAL)

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


## Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	1ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USPM31155	USPM27486	USPR000663
Sample Date		Client Info		02 Nov 2023	12 Jul 2023	05 Apr 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	nnm	ASTM D5185m	>50		<1	0
Chromium	ppm	ASTM D5185m	>30	0	<1	0
	ppm			0	<1	
Nickel	ppm	ASTM D5185m	>4			0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m	10	0	0	0
Aluminum	ppm	ASTM D5185m		0	<1	1
Lead	ppm	ASTM D5185m	>20	0	<1	0
Copper	ppm	ASTM D5185m	>40	0	<1	0
Tin	ppm	ASTM D5185m	>5	0	1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	<1	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	<1	0
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m	0	0	5	2
Calcium	ppm	ASTM D5185m	0	0	0	0
Phosphorus	ppm	ASTM D5185m	1	0	5	5
Zinc	ppm	ASTM D5185m	0	0	2	0
Sulfur	ppm	ASTM D5185m	0	11	12	0
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	8	16	15
Sodium	ppm	ASTM D5185m		<1	2	0
Potassium	ppm	ASTM D5185m	>20	0	2	0
Water	%	ASTM D6304	>0.2	0.110	0.128	0.174
ppm Water	ppm	ASTM D6304	>2000	1108.8	1285.7	1749.5
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	612	463	
Particles >6µm		ASTM D7647	>2500	148	112	
Particles >14µm		ASTM D7647	>320	15	15	
Particles >21µm		ASTM D7647	>80	3	4	
Particles >38µm		ASTM D7647	>20	0	1	
Particles >71µm		ASTM D7647	>4	0	0	
Oil Cleanliness		ISO 4406 (c)	>20/18/15	16/14/11	16/14/11	
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.05	0.38	0.57	0.45
	ing NOT //g	C+UOU INI DOU40	0.00	0.50	0.57	0.40



# **OIL ANALYSIS REPORT**

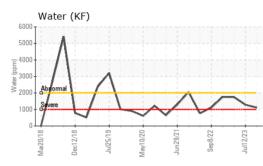

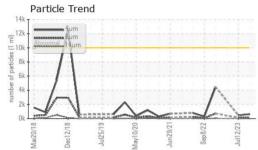

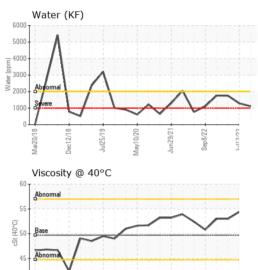

40

14

12

10

8

6

4

2


0 25

mber of particles (1 ml)

Mar20/1

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	🔺 MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPER	TIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	49.7	52.5	54.4	53.0
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color					3	
Bottom			(			

Bottom

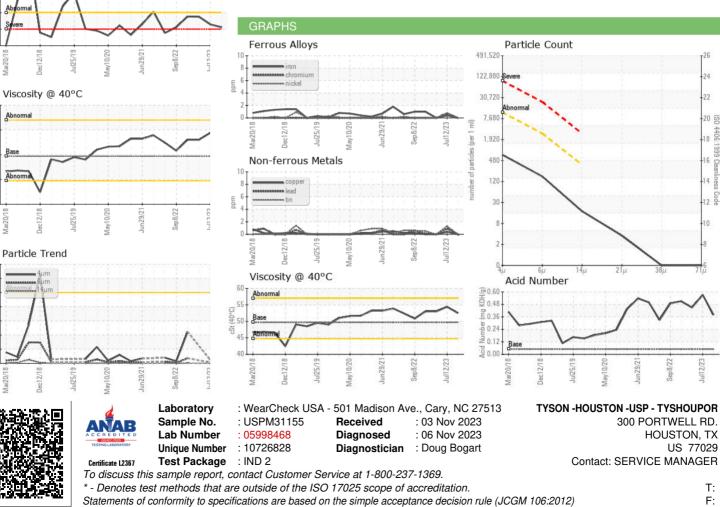

Contact/Location: SERVICE MANAGER - TYSHOU