




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

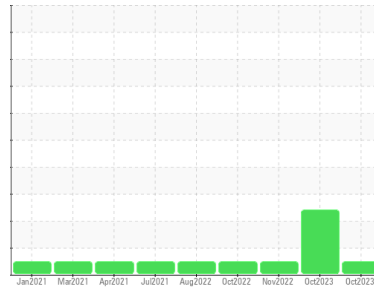

Machine Id
CATERPILLAR 5178
 Component
Diesel Engine
 Fluid
DIESSEL ENGINE OIL SAE 15W40 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0650926	WC0745209	WC0744171
Sample Date	Client Info			23 Oct 2023	20 Oct 2023	29 Nov 2022
Machine Age	hrs	Client Info		10857	0	8155
Oil Age	hrs	Client Info		75	0	0
Oil Changed	Client Info			Not Chngd	N/A	N/A
Sample Status				NORMAL	ABNORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	3	49	7
Chromium	ppm	ASTM D5185m	>20	0	2	<1
Nickel	ppm	ASTM D5185m	>4	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	2	▲ 31	5
Lead	ppm	ASTM D5185m	>40	0	<1	<1
Copper	ppm	ASTM D5185m	>330	0	5	1
Tin	ppm	ASTM D5185m	>15	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	0	0	13
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	58	61	61
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	450	924	895	905
Calcium	ppm	ASTM D5185m	3000	1048	1152	1150
Phosphorus	ppm	ASTM D5185m	1150	996	984	1008
Zinc	ppm	ASTM D5185m	1350	1222	1226	1204
Sulfur	ppm	ASTM D5185m	4250	2973	2799	3612



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	7	▲ 28	6
Sodium	ppm	ASTM D5185m	>158	2	15	2
Potassium	ppm	ASTM D5185m	>20	0	0	0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.4	2.4	0.5
Nitration	Abs/cm	*ASTM D7624	>20	6.6	11.2	7.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.5	24.5	20.1

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.1	17.9	14.7
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	8.9	7.6	10.5











OIL ANALYSIS REPORT

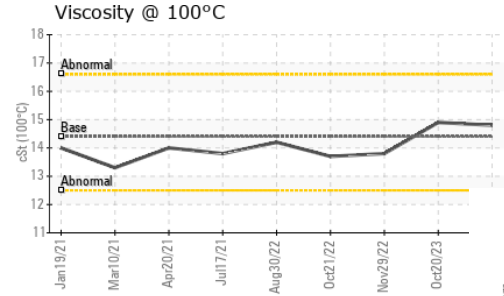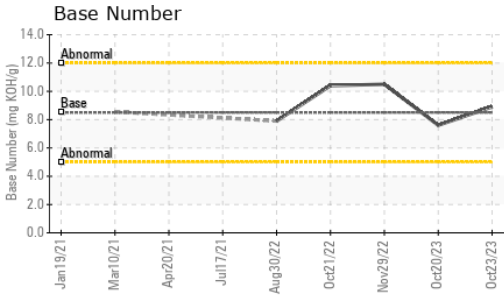

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	14.8	14.9	13.8

GRAPHS

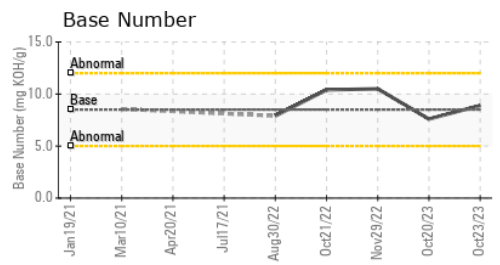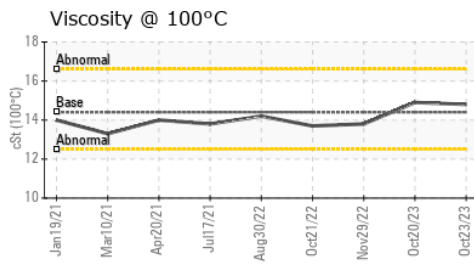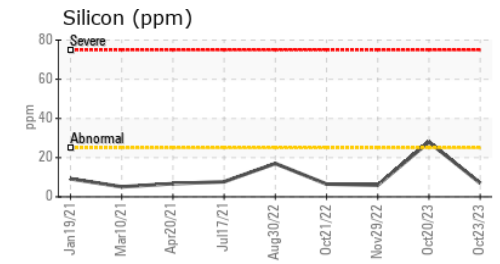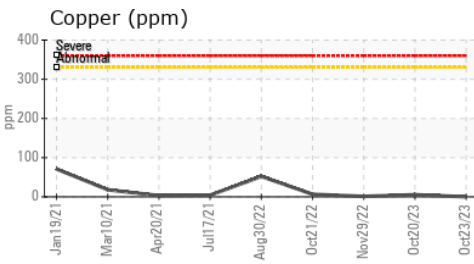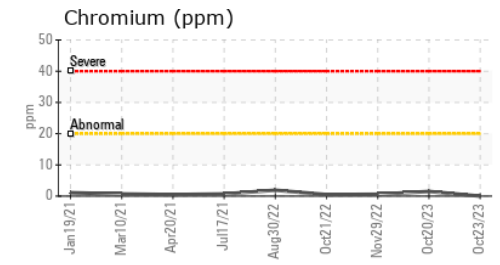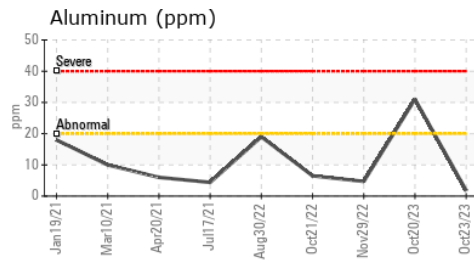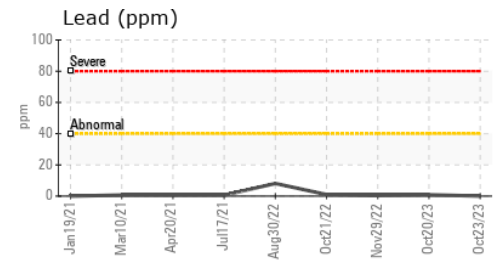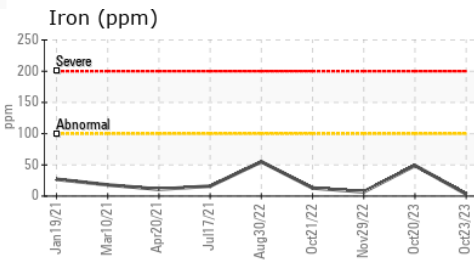

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0650926 **Received** : 06 Nov 2023
Lab Number : 05998678 **Diagnosed** : 06 Nov 2023
Unique Number : 10727038 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

INTERSTATE WASTE-CHESTER
 89 BLACK MEADOW RD
 CHESTER, NY
 US 10918
 Contact: ROB CLARKE
 rclarke@interstatewaste.com
 T:
 F: (845)572-3301

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)