




# OIL ANALYSIS REPORT

Sample Rating Trend

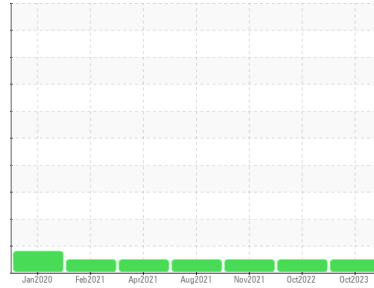

**NORMAL**



Area  
**Chester**  
 Machine Id  
**FREIGHTLINER 1423**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0831013</b>	WC0650846	WC0620272
Sample Date	Client Info		<b>27 Oct 2023</b>	02 Oct 2022	23 Nov 2021
Machine Age	hrs	Client Info	<b>0</b>	22022	30350
Oil Age	hrs	Client Info	<b>450</b>	0	500
Oil Changed	Client Info		<b>N/A</b>	N/A	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	0.0	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>29</b>	66	19
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	3	1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >30	<b>&lt;1</b>	6	3
Lead	ppm	ASTM D5185m >30	<b>&lt;1</b>	2	<1
Copper	ppm	ASTM D5185m >150	<b>3</b>	558	2
Tin	ppm	ASTM D5185m >5	<b>0</b>	1	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>6</b>	6	7
Barium	ppm	ASTM D5185m 10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 100	<b>63</b>	61	57
Manganese	ppm	ASTM D5185m	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m 450	<b>823</b>	903	931
Calcium	ppm	ASTM D5185m 3000	<b>1229</b>	1221	1095
Phosphorus	ppm	ASTM D5185m 1150	<b>988</b>	1036	1021
Zinc	ppm	ASTM D5185m 1350	<b>1216</b>	1245	1120
Sulfur	ppm	ASTM D5185m 4250	<b>3041</b>	3369	2641

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>6</b>	7	5
Sodium	ppm	ASTM D5185m >158	<b>2</b>	2	1
Potassium	ppm	ASTM D5185m >20	<b>0</b>	5	0

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>1.4</b>	2	0.7
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.5</b>	10.4	6.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.2</b>	23.2	19.2

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.6</b>	16.4	13.4
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>8.5</b>	9.2	---







# OIL ANALYSIS REPORT

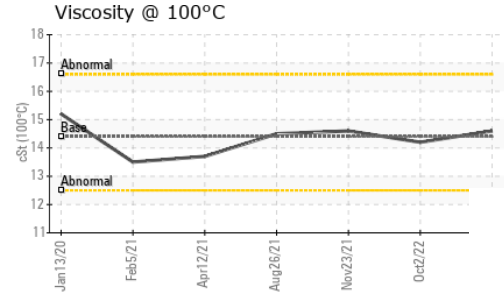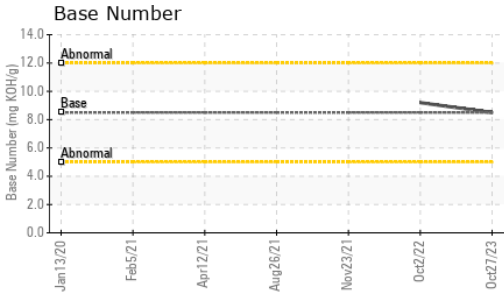

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>14.6</b>	14.2	14.6

### GRAPHS

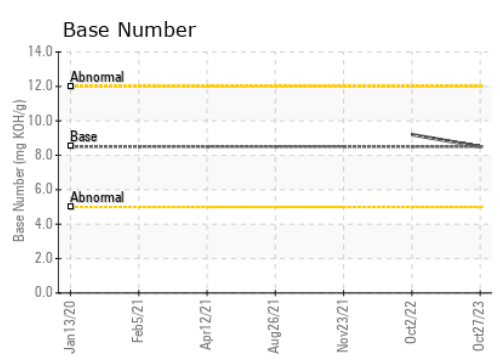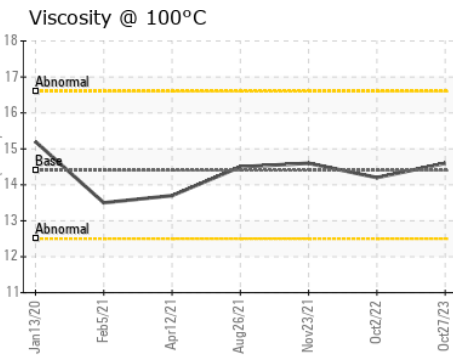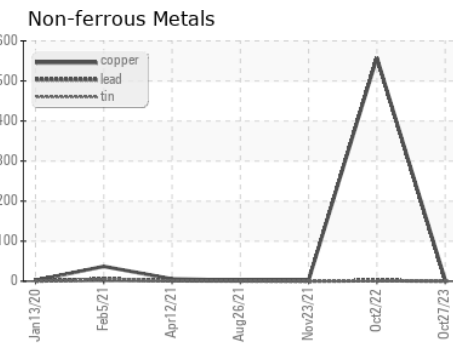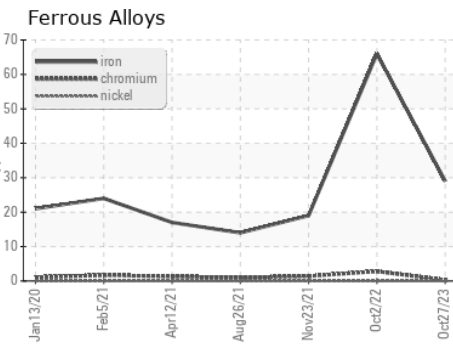

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0831013 **Received** : 06 Nov 2023  
**Lab Number** : **05998684** **Diagnosed** : 06 Nov 2023  
**Unique Number** : 10727044 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**INTERSTATE WASTE-CHESTER**  
 89 BLACK MEADOW RD  
 CHESTER, NY  
 US 10918  
 Contact: ROB CLARKE  
 rclarke@interstatewaste.com  
 T:  
 F: (845)572-3301

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)