




# OIL ANALYSIS REPORT

## Sample Rating Trend

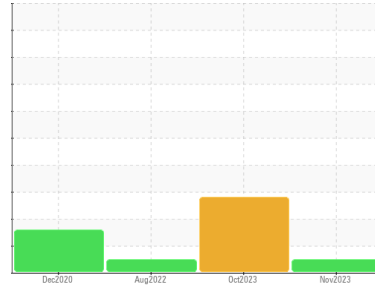

**NORMAL**



Area  
**Chester**  
 Machine Id  
**PETERBILT 6675**

Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0830948</b>	WC0831016	WC0650843
Sample Date	Client Info			<b>05 Nov 2023</b>	17 Oct 2023	18 Aug 2022
Machine Age	mls	Client Info		<b>86221</b>	0	0
Oil Age	mls	Client Info		<b>0</b>	0	450
Oil Changed	Client Info			<b>Not Chngd</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	ABNORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	0.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>110	<b>6</b>	42	8
Chromium	ppm	ASTM D5185m	>4	<b>0</b>	4	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>25	<b>5</b>	7	3
Lead	ppm	ASTM D5185m	>45	<b>0</b>	2	<1
Copper	ppm	ASTM D5185m	>85	<b>0</b>	3	1
Tin	ppm	ASTM D5185m	>4	<b>0</b>	<1	<1
Antimony	ppm	ASTM D5185m		<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	<b>6</b>	17	8
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>57</b>	3	61
Manganese	ppm	ASTM D5185m		<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m	450	<b>795</b>	42	865
Calcium	ppm	ASTM D5185m	3000	<b>1204</b>	▲ 114	1155
Phosphorus	ppm	ASTM D5185m	1150	<b>967</b>	▲ 419	982
Zinc	ppm	ASTM D5185m	1350	<b>1197</b>	▲ 467	1228
Sulfur	ppm	ASTM D5185m	4250	<b>3003</b>	5424	2986



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	<b>3</b>	6	3
Sodium	ppm	ASTM D5185m	>158	<b>2</b>	11	0
Potassium	ppm	ASTM D5185m	>20	<b>8</b>	7	2

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.5</b>	3.6	7.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.3</b>	16.5	20.7

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>13.4</b>	12.8	15.8
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>8.5</b>	▲ 2.3	9.7







# OIL ANALYSIS REPORT

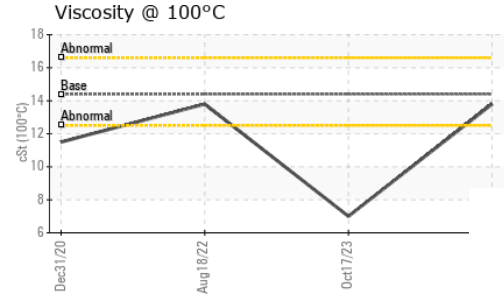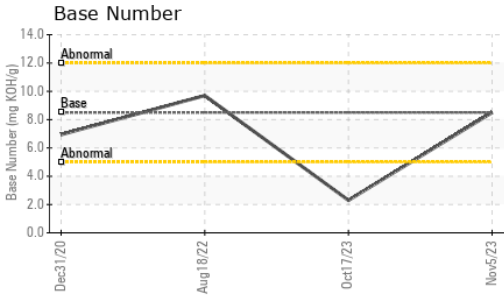

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.8</b>	▲ 7	13.8

## GRAPHS

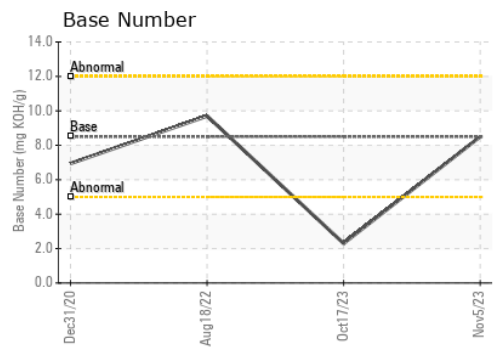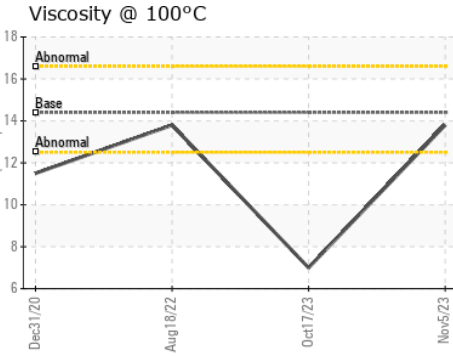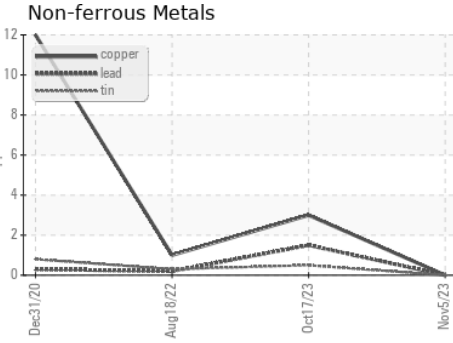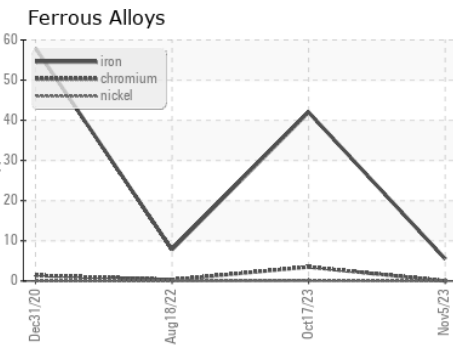

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0830948 **Received** : 06 Nov 2023  
**Lab Number** : 05998685 **Diagnosed** : 06 Nov 2023  
**Unique Number** : 10727045 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**INTERSTATE WASTE-CHESTER**  
 89 BLACK MEADOW RD  
 CHESTER, NY  
 US 10918  
 Contact: ROB CLARKE  
 rclarke@interstatewaste.com  
 T:  
 F: (845)572-3301

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)